

COOLING CAPACITY: 17,800 - 56,500 BTU/H

ENERGY-EFFICIENT SPLIT SYSTEM AIR CONDITIONER UP TO 14 SEER / 12 EER



Contents

Nomenclature.....	2
Product Specifications.....	3
Expanded Cooling Data	4
AHRI Ratings	24
Dimensions	52
Wiring Diagrams	53
Accessories	56

Standard Features

- Energy-efficient compressor
- Single-speed ECM condenser fan motor
- Factory-installed filter drier
- Copper tube/aluminum fin coil
- Service valves with sweat connections and easy-access gauge ports
- Contactor with lug connection
- Ground lug connection
- AHRI Certified; ETL Listed

Cabinet Features

- Heavy-gauge galvanized-steel cabinet with louvered sound control top
- Steel louver coil guard
- Attractive Architectural Gray powder-paint finish with 500-hour salt-spray approval
- Top and side maintenance access
- Single-panel access to controls with space provided for field-installed accessories



COMPANY WITH
 QUALITY SYSTEM
 CERTIFIED BY DNV GL
 ■ ISO 9001 ■

COMPANY WITH
 ENVIRONMENTAL SYSTEM
 CERTIFIED BY DNV GL
 ■ ISO 14001 ■

* Complete warranty details available from your local dealer or at www.amana-hac.com. To receive the 10-Year Parts Limited Warranty, online registration must be completed within 60 days of installation. Online registration is not required in California or Québec.

	A	N	X	13	036	1	AA
	1	2	3	4,5	6,7,8	9	10,11
Brand							Engineering *
A Amana® Brand							Major/ Minor Revisions * Not used for order or inventory control.
Product Category							Electrical
S Split System							1 - 208/230 V, 1 Phase, 60 Hz
N Nominal Split System							
Unit Type							Nominal Capacity
X Condenser R-410A							018 1½ Tons 042 3½ Tons
Z Heat Pump R-410A							024 2 Tons 048 4 Tons
							030 2½ Tons 060 5 Tons
							036 3 Tons 061 5 Tons (high capacity)
Efficiency							
13 13 SEER	16	16 SEER					
14 14 SEER	18	18 SEER					

	ANX13 0181A*	ANX13 0181B*	ANX13 0241A*	ANX13 0241B*	ANX13 0301A*	ANX13 0301B*	ANX13 0361A*	ANX13 0421A*	ANX13 0481A*	ANX13 0601A*	ANX13 0611A*
CAPACITIES											
Nominal Cooling (BTU/h)	17,800	17,800	23,000	23,000	28,400	28,400	33,600	40,000	46,000	57,000	56,500
SEER / EER	13 / 11	13 / 11	13 / 11	13 / 11	13 / 11	13 / 11	13 / 11	13 / 11	13 / 11	13 / 11	13 / 11
Decibels	75	72	71	75	73	74	74	75	76	77	77
COMPRESSOR											
RLA	9.0	6.0	13.5	7.7	12.8	10.5	14.1	17.9	19.9	25	26.4
LRA	48	37.5	58.3	37	64	47	77	112	109	134	134
CONDENSER FAN MOTOR											
Horsepower	1/8	1/8	1/8	1/8	1/8	1/8	1/4	1/4	1/4	1/4	1/4
FLA	0.7	0.7	0.7	0.65	0.65	0.7	1.2	1.2	1.2	1.2	1.3
REFRIGERATION SYSTEM											
Refrigerant Line Size ¹											
Liquid Line Size ("O.D.)	3/8"	3/8"	3/8"	3/8"	3/8"	3/8"	3/8"	3/8"	3/8"	3/8"	3/8"
Suction Line Size ("O.D.)	3/4"	3/4"	3/4"	3/4"	3/4"	3/4"	7/8"	1 1/8"	1 1/8"	1 1/8"	1 1/8"
Refrigerant Connection Size											
Liquid Valve Size ("O.D.)	3/8"	3/8"	3/8"	3/8"	3/8"	3/8"	3/8"	3/8"	3/8"	3/8"	3/8"
Suction Valve Size ("O.D.) ^{4 5}	3/4"	3/4"	3/4"	3/4"	3/4"	3/4"	3/4" ³	7/8" ⁴	7/8" ⁴	7/8" ⁴	7/8" ⁴
Valve Type	Sweat	Sweat	Sweat	Sweat	Sweat	Sweat	Sweat	Sweat	Sweat	Sweat	Sweat
Refrigerant Charge	69	63	63	60	60	68	62	80	91	94	111
Shipped with Orifice Size	0.051	0.052	0.057	0.055	0.065	0.067	0.071	0.074	0.078	0.088	0.086
ELECTRICAL DATA											
Voltage/ Phase (60 Hz)	208-230/ 1	208-230/ 1	208-230/ 1	208-230/ 1	208-230/ 1	208/230-60	208-230/ 1	208-230/ 1	208-230/ 1	208-230/ 1	208-230/ 1
Minimum Circuit Ampacity ²	12	8.2	17.8	10.3	16.7	13.8	18.8	23.6	26.1	32.5	34.3
Max. Overcurrent Protection ³	20 amps	15 amps	30 amps	15 amps	25 amps	20	30 amps	40 amps	45 amps	50 amps	60 amps
Min / Max Volts	197/253	197/253	197/253	197/253	197/253	197/253	197/253	197/253	197/253	197/253	197/253
Electrical Conduit Size	1/2" or 3/4"	1/2" or 3/4"	1/2" or 3/4"	1/2" or 3/4"	1/2" or 3/4"	1/2" or 3/4"	1/2" or 3/4"	1/2" or 3/4"	1/2" or 3/4"	1/2" or 3/4"	1/2" or 3/4"
SHIP WEIGHT (LBS)	145	141	145	120	134	153	157	206	225	209	231

¹ Line sizes denoted for 25' line sets, tested and rated in accordance with AHRI Standard 210/240. For other line-set lengths or sizes, refer to the installation and Operating instructions and/or the long line-set guidelines.

² Wire size should be determined in accordance with National Electrical Codes; extensive wire runs will require larger wire sizes

³ Must use time-delay fuses or HACR-type circuit breakers of the same size as noted.

⁴ Installer will need to supply 3/4" to 7/8" adapters for suction line connections.

⁵ Installer will need to supply 7/8" to 1 1/8" adapters for suction line connections.

NOTES

- Always check the S&R plate for electrical data on the unit being installed.
- Unit is charged with refrigerant for 15' of 3/8" liquid line. System charge must be adjusted per Installation Instructions Final Charge Procedure.
- This product may not be installed in the Southeast (including Hawaii) or Southwest Regions as of Jan. 1, 2015.

		OUTDOOR AMBIENT TEMPERATURE																							
		65°F				75°F				85°F				95°F				105°F				115°F			
IDB	AIRFLOW	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71
70	MBh	15.8	16.4	17.9	-	15.4	16.0	17.5	-	15.1	15.6	17.1	-	14.7	15.2	16.7	-	14.0	14.5	15.9	-	12.9	13.4	14.7	-
	S/T	0.67	0.56	0.39	-	0.70	0.58	0.40	-	0.72	0.60	0.41	-	0.74	0.62	0.43	-	0.77	0.64	0.44	-	0.77	0.65	0.45	-
	ΔT	19	16	12	-	19	16	12	-	19	16	12	-	19	16	12	-	19	16	12	-	18	15	12	-
	kW	1.26	1.29	1.33	-	1.35	1.38	1.42	-	1.43	1.46	1.50	-	1.50	1.53	1.57	-	1.55	1.59	1.64	-	1.60	1.64	1.69	-
	Amps	4.7	4.8	5.0	-	5.1	5.2	5.4	-	5.5	5.6	5.8	-	5.9	6.0	6.2	-	6.2	6.4	6.6	-	6.6	6.7	7.0	-
	HI PR	214	230	243	-	240	258	272	-	272	293	310	-	310	334	353	-	349	376	397	-	386	415	438	-
	LO PR	101	108	118	-	107	114	125	-	111	119	129	-	117	125	136	-	123	130	142	-	127	135	147	-
70	MBh	17.1	17.7	19.4	-	16.7	17.3	19.0	-	16.3	16.9	18.5	-	15.9	16.5	18.1	-	15.1	15.7	17.2	-	14.0	14.5	15.9	-
	S/T	0.70	0.58	0.40	-	0.72	0.60	0.42	-	0.74	0.62	0.43	-	0.77	0.64	0.44	-	0.80	0.66	0.46	-	0.80	0.67	0.46	-
	ΔT	18	16	12	-	19	16	12	-	19	16	12	-	19	16	12	-	18	16	12	-	17	15	11	-
	kW	1.29	1.32	1.35	-	1.38	1.41	1.45	-	1.46	1.49	1.54	-	1.53	1.56	1.61	-	1.59	1.62	1.67	-	1.64	1.68	1.73	-
	Amps	4.8	4.9	5.1	-	5.2	5.3	5.5	-	5.6	5.8	6.0	-	6.0	6.2	6.4	-	6.4	6.6	6.8	-	6.8	6.9	7.2	-
	HI PR	220	237	250	-	247	266	281	-	281	302	319	-	320	344	364	-	360	387	409	-	398	428	452	-
	LO PR	105	111	122	-	111	118	128	-	115	122	133	-	121	128	140	-	126	135	147	-	131	139	152	-
675	MBh	17.6	18.3	20.0	-	17.2	17.9	19.6	-	16.8	17.4	19.1	-	16.4	17.0	18.6	-	15.6	16.2	17.7	-	14.4	15.0	16.4	-
	S/T	0.73	0.61	0.42	-	0.76	0.63	0.44	-	0.78	0.65	0.45	-	0.80	0.67	0.46	-	0.83	0.70	0.48	-	0.84	0.70	0.49	-
	ΔT	18	15	12	-	18	15	12	-	18	15	12	-	18	16	12	-	18	15	12	-	17	14	11	-
	kW	1.30	1.33	1.36	-	1.39	1.42	1.46	-	1.47	1.50	1.55	-	1.54	1.58	1.62	-	1.60	1.64	1.69	-	1.66	1.69	1.74	-
	Amps	4.9	5.0	5.1	-	5.3	5.4	5.5	-	5.7	5.8	6.0	-	6.1	6.2	6.4	-	6.5	6.6	6.8	-	6.8	7.0	7.2	-
	HI PR	222	239	253	-	249	268	283	-	284	305	322	-	323	348	367	-	364	391	413	-	402	432	456	-
	LO PR	106	112	123	-	112	119	130	-	116	123	135	-	122	130	142	-	128	136	148	-	132	141	153	-

75	525	MBh	16.1	16.5	17.9	19.2	15.7	16.2	17.5	18.8	15.3	15.8	17.1	18.3	15.0	15.4	16.7	17.9	14.2	14.6	15.8	17.0	13.2	13.5	14.7	15.7	
		S/T	0.77	0.68	0.52	0.33	0.79	0.71	0.54	0.35	0.81	0.73	0.55	0.35	0.84	0.75	0.57	0.37	0.87	0.78	0.59	0.38	0.88	0.79	0.59	0.38	
		ΔT	22	20	16	11	22	20	16	11	22	20	16	11	22	20	17	11	22	20	16	11	20	19	15	11	
		kW	1.27	1.30	1.33	1.37	1.36	1.39	1.43	1.47	1.44	1.47	1.51	1.56	1.51	1.54	1.59	1.63	1.57	1.60	1.65	1.70	1.62	1.65	1.70	1.76	
		Amps	4.7	4.9	5.0	5.2	5.1	5.2	5.4	5.6	5.5	5.7	5.9	6.1	5.9	6.1	6.2	6.5	6.3	6.4	6.6	6.9	6.6	6.8	7.0	7.3	
		HI PR	216	232	245	256	242	260	275	287	275	296	313	326	314	337	356	372	372	353	380	401	418	390	419	443	462
		LO PR	103	109	119	127	108	115	126	134	113	120	131	139	118	126	137	146	124	132	144	153	128	136	149	159	
	600	MBh	17.4	17.9	19.4	20.8	17.0	17.5	19.0	20.3	16.6	17.1	18.5	19.9	16.2	16.7	18.1	19.4	15.4	15.8	17.2	18.4	14.3	14.7	15.9	17.1	
		S/T	0.79	0.71	0.54	0.35	0.82	0.74	0.56	0.36	0.84	0.75	0.57	0.37	0.87	0.78	0.59	0.38	0.90	0.81	0.61	0.39	0.91	0.82	0.62	0.40	
		ΔT	21	20	16	11	21	20	16	11	21	20	16	11	22	20	16	11	21	20	16	11	20	18	15	10	
kW		1.30	1.33	1.36	1.41	1.39	1.42	1.46	1.51	1.47	1.50	1.55	1.60	1.54	1.58	1.62	1.67	1.60	1.64	1.69	1.74	1.66	1.69	1.74	1.80		
Amps		4.9	5.0	5.1	5.3	5.3	5.4	5.5	5.7	5.7	5.8	6.0	6.2	6.1	6.2	6.4	6.7	6.5	6.6	6.8	7.1	6.8	7.0	7.2	7.5		
HI PR		222	239	253	264	250	269	284	296	284	305	322	336	323	348	367	383	364	391	413	431	402	432	457	476		
LO PR		106	112	123	131	112	119	130	138	116	123	135	144	122	130	142	151	128	136	148	158	132	141	153	163		
675	MBh	17.9	18.5	20.0	21.5	17.5	18.0	19.5	21.0	17.1	17.6	19.1	20.5	16.7	17.2	18.6	20.0	15.9	16.3	17.7	19.0	14.7	15.1	16.4	17.6		
	S/T	0.83	0.74	0.56	0.36	0.86	0.77	0.58	0.38	0.88	0.79	0.60	0.39	0.91	0.82	0.62	0.40	0.95	0.85	0.64	0.41	0.96	0.85	0.65	0.42		
	ΔT	20	19	15	11	21	19	16	11	21	19	16	11	21	19	16	11	20	19	15	11	19	18	14	10		
	kW	1.31	1.34	1.38	1.42	1.40	1.43	1.47	1.52	1.48	1.51	1.56	1.61	1.56	1.59	1.64	1.69	1.62	1.65	1.70	1.75	1.67	1.70	1.76	1.81		
	Amps	4.9	5.0	5.2	5.4	5.3	5.4	5.6	5.8	5.7	5.9	6.1	6.3	6.1	6.3	6.5	6.7	6.5	6.7	6.9	7.1	6.9	7.1	7.3	7.6		
	HI PR	225	242	255	266	252	271	286	299	287	308	326	340	326	351	371	387	367	395	417	435	406	437	461	481		
	LO PR	107	114	124	132	113	120	131	139	117	125	136	145	123	131	143	152	129	137	150	160	133	142	155	165		

IDB: Entering Indoor Dry Bulb Temperature

High and low pressures are measured at the liquid and suction service valves.

Shaded area reflects ACCA (TVA) conditions

kW = Total system power
Amps = outdoor unit amps (comp.+fan)

		OUTDOOR AMBIENT TEMPERATURE																																			
		65°F						75°F						85°F						95°F						105°F						115°F					
		ENTERING INDOOR WET BULB TEMPERATURE																																			
IDB	AIRFLOW	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71												
70	525	MBh	15.6	16.2	17.7	-	15.3	15.8	17.3	-	14.9	15.4	16.9	-	14.5	15.1	16.5	-	13.8	14.3	15.7	-	12.8	13.3	14.5	-											
		S/T	0.73	0.61	0.42	-	0.76	0.63	0.44	-	0.78	0.65	0.45	-	0.80	0.67	0.46	-	0.83	0.70	0.48	-	0.84	0.70	0.49	-											
		ΔT	20	17	13	-	20	18	13	-	20	18	13	-	20	18	13	-	20	17	13	-	19	16	12	-											
		kW	0.98	1.01	1.04	-	1.07	1.09	1.13	-	1.14	1.17	1.21	-	1.21	1.24	1.28	-	1.26	1.30	1.34	-	1.31	1.34	1.39	-											
		Amps	3.9	4.0	4.2	-	4.3	4.4	4.5	-	4.7	4.8	5.0	-	5.0	5.2	5.4	-	5.4	5.5	5.7	-	5.7	5.9	6.1	-											
		HI PR	208	224	236	-	233	251	265	-	265	285	301	-	302	325	343	-	340	366	386	-	375	404	427	-											
		LO PR	104	111	121	-	110	117	127	-	114	121	133	-	120	127	139	-	126	134	146	-	130	138	151	-											
70	600	MBh	16.4	17.0	18.7	-	16.0	16.6	18.2	-	15.7	16.2	17.8	-	15.3	15.8	17.4	-	14.5	15.0	16.5	-	13.4	13.9	15.3	-											
		S/T	0.74	0.62	0.43	-	0.77	0.64	0.45	-	0.79	0.66	0.46	-	0.82	0.68	0.47	-	0.85	0.71	0.49	-	0.85	0.71	0.49	-											
		ΔT	19	16	12	-	19	16	12	-	19	16	13	-	19	17	13	-	19	16	12	-	18	15	12	-											
		kW	1.00	1.02	1.05	-	1.08	1.11	1.15	-	1.16	1.18	1.23	-	1.22	1.25	1.30	-	1.28	1.31	1.36	-	1.33	1.36	1.41	-											
		Amps	4.0	4.1	4.2	-	4.3	4.4	4.6	-	4.7	4.9	5.0	-	5.1	5.2	5.4	-	5.5	5.6	5.8	-	5.8	6.0	6.2	-											
		HI PR	211	227	239	-	236	254	269	-	269	289	305	-	306	329	348	-	344	371	391	-	380	409	432	-											
		LO PR	105	112	122	-	111	118	129	-	116	123	134	-	121	129	141	-	127	135	148	-	132	140	153	-											
650	525	MBh	16.9	17.6	19.2	-	16.5	17.1	18.8	-	16.1	16.7	18.3	-	15.8	16.3	17.9	-	15.0	15.5	17.0	-	13.9	14.4	15.7	-											
		S/T	0.76	0.63	0.44	-	0.79	0.66	0.45	-	0.81	0.67	0.47	-	0.83	0.70	0.48	-	0.86	0.72	0.50	-	0.87	0.73	0.50	-											
		ΔT	18	16	12	-	18	16	12	-	18	16	12	-	19	16	12	-	18	16	12	-	17	15	11	-											
		kW	1.01	1.03	1.07	-	1.10	1.12	1.16	-	1.17	1.20	1.25	-	1.24	1.27	1.32	-	1.30	1.33	1.38	-	1.35	1.38	1.43	-											
		Amps	4.0	4.2	4.3	-	4.4	4.5	4.7	-	4.8	5.0	5.1	-	5.2	5.3	5.5	-	5.5	5.7	5.9	-	5.9	6.1	6.3	-											
		HI PR	214	231	243	-	240	259	273	-	273	294	311	-	311	335	354	-	350	377	398	-	387	417	440	-											
		LO PR	107	114	124	-	113	120	131	-	118	125	137	-	124	131	143	-	129	138	150	-	134	142	156	-											
75	525	MBh	15.9	16.4	17.7	19.0	15.5	16.0	17.3	18.6	15.2	15.6	16.9	18.1	14.8	15.2	16.5	17.7	14.0	14.5	15.7	16.8	13.0	13.4	14.5	15.6											
		S/T	0.83	0.74	0.56	0.36	0.86	0.77	0.58	0.38	0.88	0.79	0.60	0.38	0.91	0.82	0.62	0.40	0.95	0.85	0.64	0.41	0.95	0.85	0.65	0.42											
		ΔT	23	21	18	12	23	22	18	12	24	22	18	12	24	22	18	12	23	21	18	12	22	20	16	11											
		kW	0.99	1.02	1.05	1.09	1.08	1.10	1.14	1.18	1.15	1.18	1.22	1.27	1.22	1.25	1.29	1.34	1.28	1.31	1.35	1.40	1.32	1.36	1.41	1.46											
		Amps	4.0	4.1	4.2	4.4	4.3	4.4	4.6	4.8	4.7	4.9	5.0	5.2	5.1	5.2	5.4	5.6	5.4	5.6	5.8	6.0	5.8	5.9	6.2	6.4											
		HI PR	210	226	239	249	236	253	268	279	268	288	304	318	305	328	347	362	343	369	390	407	379	408	431	450											
		LO PR	105	112	122	130	111	118	129	137	115	123	134	143	121	129	141	150	127	135	147	157	131	140	152	162											
75	600	MBh	16.7	17.2	18.6	20.0	16.3	16.8	18.2	19.5	15.9	16.4	17.8	19.1	15.5	16.0	17.3	18.6	14.8	15.2	16.5	17.7	13.7	14.1	15.2	16.4											
		S/T	0.84	0.76	0.57	0.37	0.88	0.78	0.59	0.38	0.90	0.80	0.61	0.39	0.93	0.83	0.63	0.40	0.96	0.86	0.65	0.42	0.97	0.87	0.66	0.42											
		ΔT	22	20	16	11	22	20	17	11	22	20	17	11	22	20	17	12	22	20	16	11	20	19	15	11											
		kW	1.00	1.03	1.06	1.10	1.09	1.12	1.16	1.20	1.17	1.20	1.24	1.28	1.23	1.26	1.31	1.36	1.29	1.32	1.37	1.42	1.34	1.37	1.42	1.48											
		Amps	4.0	4.1	4.3	4.4	4.4	4.5	4.7	4.8	4.8	4.9	5.1	5.3	5.2	5.3	5.5	5.7	5.5	5.7	5.9	6.1	5.9	6.0	6.2	6.5											
		HI PR	213	229	242	252	239	257	271	283	271	292	309	322	309	333	351	366	348	374	395	412	384	414	437	456											
		LO PR	106	113	124	132	112	120	131	139	117	124	136	144	123	131	142	152	129	137	149	159	133	141	154	164											
650	525	MBh	17.2	17.7	19.2	20.6	16.8	17.3	18.7	20.1	16.4	16.9	18.3	19.6	16.0	16.5	17.9	19.2	15.2	15.7	17.0	18.2	14.1	14.5	15.7	16.9											
		S/T	0.86	0.77	0.58	0.38	0.89	0.80	0.61	0.39	0.92	0.82	0.62	0.40	0.95	0.85	0.64	0.41	0.98	0.88	0.66	0.43	0.99	0.89	0.67	0.43											
		ΔT	21	19	16	11	21	20	16	11	21	20	16	11	21	20	16	11	21	20	16	11	20	18	15	10											
		kW	1.02	1.04	1.08	1.12	1.11	1.13	1.17	1.22	1.19	1.21	1.26	1.30	1.25	1.28	1.33	1.38	1.31	1.34	1.39	1.44	1.36	1.40	1.45	1.50											
		Amps	4.1	4.2	4.3	4.5	4.5	4.6	4.7	4.9	4.9	5.0	5.2	5.4	5.2	5.4	5.6	5.8	5.6	5.8	6.0	6.2	6.0	6.1	6.3	6.6											
		HI PR	216	233	246	257	243	261	276	288	276	297	314	327	315	339	357	373	354	381	402	419	391	421	444	463											
		LO PR	108	115	126	134	114	122	133	141	119	126	138	147	125	133	145	154	131	139	152	162	135	144	157	167											

DB: Entering Indoor Dry Bulb Temperature

High and low pressures are measured at the liquid and suction service valves.

Shaded area reflects ACCA (TVA) conditions

kW = Total system power
Amps = outdoor unit amps (comp.+fan)

IDB		AIRFLOW		OUTDOOR AMBIENT TEMPERATURE																							
				65°F				75°F				85°F				95°F				105°F				115°F			
				59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71
		ENTERING INDOOR WET BULB TEMPERATURE																									
		59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71		
80	525	MBh	16.2	16.5	17.7	18.9	15.8	16.1	17.3	18.4	15.4	15.8	16.8	18.0	15.0	15.4	16.4	17.6	14.3	14.6	15.6	16.7	13.2	13.5	14.5	15.5	
		S/T	0.91	0.86	0.70	0.5	0.95	0.89	0.72	0.54	0.97	0.91	0.74	0.6	1.00	0.94	0.76	0.57	1.04	0.97	0.79	0.6	1.05	0.98	0.80	0.60	
		ΔT	26	25	22	17	26	25	22	17	26	25	22	17	26	25	22	18	26	25	22	17	24	23	20	16	
		kW	1.00	1.02	1.06	1.1	1.09	1.11	1.15	1.19	1.16	1.19	1.23	1.3	1.23	1.26	1.31	1.35	1.29	1.32	1.37	1.4	1.34	1.37	1.42	1.47	
		Amps	4.0	4.1	4.3	4.4	4.4	4.5	4.6	4.8	4.8	4.9	5.1	5.3	5.1	5.3	5.5	5.7	5.5	5.6	5.8	6.1	5.8	6.0	6.2	6.5	
	600	Hi PR	212	228	241	251.0	238	256	270	282	271	291	308	321.0	308	332	350	365	347	373	394	411.0	383	412	435	454	
		LO PR	106	113	123	131.0	112	119	130	139	116	124	135	144.0	122	130	142	151	128	136	149	159.0	133	141	154	164	
		MBh	17.0	17.4	18.6	19.8	16.6	17.0	18.1	19.4	16.2	16.6	17.7	18.9	15.8	16.2	17.3	18.5	15.0	15.4	16.4	17.5	13.9	14.2	15.2	16.2	
		S/T	0.93	0.87	0.71	0.5	0.96	0.90	0.73	0.55	0.98	0.92	0.75	0.6	1.00	0.95	0.78	0.58	1.00	0.99	0.81	0.6	1.00	1.00	0.81	0.61	
		ΔT	24	23	20	16	24	23	20	16	25	23	20	16	24	24	21	16	23	23	20	16	21	22	19	15	
650	kW	1.01	1.04	1.07	1.1	1.10	1.13	1.17	1.21	1.18	1.21	1.25	1.3	1.25	1.28	1.32	1.37	1.30	1.34	1.38	1.4	1.35	1.39	1.44	1.49		
	Amps	4.1	4.2	4.3	4.5	4.4	4.5	4.7	4.9	4.8	5.0	5.1	5.4	5.2	5.3	5.5	5.8	5.6	5.7	5.9	6.2	5.9	6.1	6.3	6.6		
	Hi PR	215	231	244	255.0	241	259	274	286	274	295	312	325.0	312	336	355	370	351	378	399	416.0	388	418	441	460		
	LO PR	107	114	125	133.0	114	121	132	140	118	126	137	146.0	124	132	144	153	130	138	151	161.0	134	143	156	166		
	MBh	17.5	17.9	19.1	20.5	17.1	17.5	18.7	20.0	16.7	17.1	18.2	19.5	16.3	16.7	17.8	19.0	15.5	15.8	16.9	18.1	14.3	14.7	15.7	16.7		
85	525	S/T	0.95	0.89	0.72	0.5	1.00	0.92	0.75	0.56	1.00	0.94	0.77	0.6	1.00	1.00	0.79	0.59	1.00	1.00	0.82	0.6	1.00	1.00	0.83	0.62	
		ΔT	24	23	20	16	24	23	20	16	24	23	20	16	23	24	20	16	22	22	20	16	20	21	18	15	
		kW	1.03	1.05	1.09	1.1	1.12	1.14	1.19	1.23	1.20	1.23	1.27	1.3	1.27	1.30	1.34	1.39	1.32	1.36	1.41	1.5	1.37	1.41	1.46	1.51	
		Amps	4.1	4.2	4.4	4.6	4.5	4.6	4.8	5.0	4.9	5.1	5.2	5.5	5.3	5.4	5.6	5.9	5.7	5.8	6.0	6.3	6.0	6.2	6.4	6.7	
		Hi PR	219	235	248	259.0	245	264	279	291	279	300	317	331.0	318	342	361	377	357	385	406	424.0	395	425	449	468	
	600	LO PR	109	116	127	135.0	115	123	134	143	120	128	139	148.0	126	134	146	156	132	141	153	163.0	137	145	159	169	
		MBh	16.5	16.8	17.6	18.7	16.1	16.4	17.2	18.3	15.7	16.0	16.8	17.9	15.3	15.6	16.3	17.4	14.5	14.8	15.5	16.6	13.5	13.7	14.4	15.3	
		S/T	0.96	0.92	0.83	0.68	0.99	0.96	0.86	0.70	1.00	0.98	0.88	0.72	1.00	1.00	0.91	0.74	1.00	1.00	0.95	0.77	1.00	1.00	0.96	0.78	
		ΔT	28	27	26	22	28	27	26	23	28	28	26	23	27	27	26	23	26	26	26	22	24	24	21	21	
		kW	1.01	1.03	1.07	1.11	1.10	1.12	1.16	1.21	1.17	1.20	1.25	1.29	1.24	1.27	1.32	1.37	1.30	1.33	1.38	1.43	1.35	1.38	1.43	1.49	
650	Amps	4.0	4.2	4.3	4.5	4.4	4.5	4.7	4.9	4.8	5.0	5.1	5.3	5.2	5.3	5.5	5.7	5.5	5.7	5.9	6.1	5.9	6.1	6.3	6.5		
	Hi PR	214	230	243	254	240	259	273	285	273	294	311	324	311	335	354	369	350	377	398	415	387	416	440	459		
	LO PR	107	114	124	132	113	120	131	140	118	125	137	145	124	131	143	153	129	138	150	160	134	142	155	166		
	MBh	17.3	17.6	18.5	19.7	16.9	17.2	18.0	19.2	16.5	16.8	17.6	18.8	16.1	16.4	17.2	18.3	15.3	15.6	16.3	17.4	14.2	14.4	15.1	16.1		
	S/T	0.97	0.94	0.85	0.69	1.00	0.97	0.88	0.71	1.00	1.00	0.90	0.73	1.00	1.00	0.93	0.75	1.00	1.00	0.96	0.78	1.00	1.00	0.97	0.79		
88	525	ΔT	26	25	24	21	26	26	24	21	25	26	24	21	25	25	24	21	23	24	24	21	22	22	23	20	
		kW	1.02	1.05	1.08	1.12	1.11	1.14	1.18	1.22	1.19	1.22	1.26	1.31	1.26	1.29	1.33	1.38	1.32	1.35	1.40	1.45	1.37	1.40	1.45	1.50	
		Amps	4.1	4.2	4.4	4.5	4.5	4.6	4.7	4.9	4.9	5.0	5.2	5.4	5.3	5.4	5.6	5.8	5.6	5.8	6.0	6.2	6.0	6.1	6.4	6.6	
		Hi PR	217	234	247	257	244	262	277	289	277	298	315	328	315	339	358	374	355	382	403	421	392	422	446	465	
		LO PR	109	115	126	134	115	122	133	142	119	127	138	147	125	133	145	155	131	140	152	162	136	144	158	168	
	600	MBh	17.8	18.2	19.0	20.3	17.4	17.8	18.6	19.8	17.0	17.3	18.2	19.4	16.6	16.9	17.7	18.9	15.8	16.1	16.8	18.0	14.6	14.9	15.6	16.6	
		S/T	0.99	0.96	0.86	0.70	1.00	0.99	0.89	0.73	1.00	1.00	0.92	0.74	1.00	1.00	0.95	0.77	1.00	1.00	0.98	0.80	1.00	1.00	0.99	0.80	
		ΔT	25	25	23	20	25	25	24	20	24	25	24	20	24	24	24	21	22	23	23	20	21	21	22	19	
		kW	1.04	1.06	1.10	1.14	1.13	1.15	1.20	1.24	1.21	1.24	1.28	1.33	1.28	1.31	1.36	1.41	1.34	1.37	1.42	1.47	1.39	1.42	1.47	1.53	
		Amps	4.2	4.3	4.4	4.6	4.5	4.7	4.8	5.0	5.0	5.1	5.3	5.5	5.3	5.5	5.7	5.9	5.7	5.9	6.1	6.3	6.1	6.2	6.5	6.7	
650	Hi PR	221	238	251	262	248	267	282	294	282	303	320	334	321	345	365	380	361	389	410	428	399	429	453	473		
	LO PR	110	117	128	137	117	124	135	144	121	129	141	150	127	135	148	157	133	142	155	165	138	147	160	171		
	MBh	17.8	18.2	19.0	20.3	17.4	17.8	18.6	19.8	17.0	17.3	18.2	19.4	16.6	16.9	17.7	18.9	15.8	16.1	16.8	18.0	14.6	14.9	15.6	16.6		
	S/T	0.99	0.96	0.86	0.70	1.00	0.99	0.89	0.73	1.00	1.00	0.92	0.74	1.00	1.00	0.95	0.77	1.00	1.00	0.98	0.80	1.00	1.00	0.99	0.80		
	ΔT	25	25	23	20	25	25	24	20	24	25	24	20	24	24	24	21	22	23	23	20	21	21	22	19		
91	525	kW	1.04	1.06	1.10	1.14	1.13	1.15	1.20	1.24	1.21	1.24	1.28	1.33	1.28	1.31	1.36	1.41	1.34	1.37	1.42	1.47	1.39	1.42	1.47	1.53	
		Amps	4.2	4.3	4.4	4.6	4.5	4.7	4.8	5.0	5.0	5.1	5.3	5.5	5.3	5.5	5.7	5.9	5.7	5.9	6.1	6.3	6.1	6.2	6.5	6.7	
		Hi PR	221	238	251	262	248	267	282	294	282	303	320	334	321	345	365	380	361	389	410	428	399	429	453	473	
		LO PR	110	117	128	137	117	124	135	144	121	129	141	150	127	135	148	157	133	142	155	165	138	147	160	171	
		MBh	17.8	18.2	19.0	20.3	17.4	17.8	18.6	19.8	17.0	17.3	18.2	19.4	16.6	16.9	17.7	18.9	15.8	16.1	16.8	18.0	14.6	14.9	15.6	16.6	
	600	S/T	0.99	0.96	0.86	0.70	1.00	0.99	0.89	0.73	1.00	1.00	0.92	0.74	1.00	1.00	0.95	0.77	1.00	1.00	0.98	0.80	1.00	1.00	0.99	0.80	
		ΔT	25	25	23	20	25	25	24	20	24	25	24	20	24	24	24	21	22	23	23	20	21	21	22	19	
		kW	1.04	1.06	1.10	1.14	1.13	1.15	1.20	1.24	1.21	1.24	1.28	1.33	1.28	1.31	1.36	1.41	1.34	1.37	1.42	1.47	1.39	1.42	1.47	1.53	
		Amps	4.2	4.3	4.4	4.6	4.5	4.7	4.8	5.0	5.0	5.1	5.3	5.5	5.3	5.5	5.7	5.9	5.7	5.9	6.1	6.3	6.1	6.2	6.5	6.7	
		Hi PR	221	238	251	262	248	267	282	294	282	303	320	334	321	345	365	380	361	389	410	428	399	429	453	473	
650	LO PR	110	117	128	137	117	124	135	144	121	129	141	150	127	135	148	157	133	142	155							

		OUTDOOR AMBIENT TEMPERATURE																							
		65°F				75°F				85°F				95°F				105°F				115°F			
IDB	AIRFLOW	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71
70	MBh	20.2	20.9	22.9	-	19.7	20.4	22.4	-	19.3	20.0	21.9	-	18.8	19.5	21.3	-	17.8	18.5	20.3	-	16.5	17.1	18.8	-
	S/T	0.68	0.57	0.40	-	0.71	0.59	0.41	-	0.73	0.61	0.42	-	0.75	0.63	0.43	-	0.78	0.65	0.45	-	0.79	0.66	0.45	-
	ΔT	18	16	12	-	18	16	12	-	18	16	12	-	19	16	12	-	18	16	12	-	17	15	11	-
	kW	1.60	1.64	1.68	-	1.72	1.75	1.81	-	1.82	1.86	1.91	-	1.91	1.95	2.01	-	1.98	2.03	2.09	-	2.05	2.09	2.16	-
	Amps	5.9	6.0	6.2	-	6.4	6.5	6.7	-	6.9	7.1	7.3	-	7.4	7.6	7.8	-	7.9	8.1	8.4	-	8.4	8.6	8.9	-
	HI PR	222	239	253	-	249	268	283	-	284	305	322	-	323	348	367	-	364	391	413	-	402	432	456	-
	LO PR	100	106	116	-	106	112	123	-	110	117	128	-	115	123	134	-	121	129	140	-	125	133	145	-
800	MBh	21.9	22.7	24.8	-	21.4	22.2	24.3	-	20.9	21.6	23.7	-	20.4	21.1	23.1	-	19.3	20.0	22.0	-	17.9	18.6	20.3	-
	S/T	0.71	0.59	0.41	-	0.74	0.61	0.43	-	0.75	0.63	0.44	-	0.78	0.65	0.45	-	0.81	0.67	0.47	-	0.81	0.68	0.47	-
	ΔT	18	15	12	-	18	16	12	-	18	16	12	-	18	16	12	-	18	16	12	-	17	15	11	-
	kW	1.64	1.67	1.72	-	1.76	1.79	1.85	-	1.86	1.90	1.96	-	1.95	2.00	2.06	-	2.03	2.08	2.14	-	2.10	2.14	2.21	-
	Amps	6.1	6.2	6.4	-	6.6	6.7	6.9	-	7.1	7.3	7.5	-	7.6	7.8	8.1	-	8.1	8.3	8.6	-	8.6	8.8	9.1	-
	HI PR	229	247	260	-	257	277	292	-	293	315	332	-	333	359	379	-	375	403	426	-	414	446	471	-
	LO PR	103	110	120	-	109	116	127	-	113	120	132	-	119	127	138	-	125	133	145	-	129	137	150	-
900	MBh	22.5	23.4	25.6	-	22.0	22.8	25.0	-	21.5	22.3	24.4	-	21.0	21.7	23.8	-	19.9	20.6	22.6	-	18.4	19.1	21.0	-
	S/T	0.74	0.62	0.43	-	0.77	0.64	0.45	-	0.79	0.66	0.46	-	0.82	0.68	0.47	-	0.85	0.71	0.49	-	0.85	0.71	0.49	-
	ΔT	17	15	11	-	17	15	11	-	17	15	11	-	17	15	11	-	17	15	11	-	16	14	11	-
	kW	1.65	1.69	1.74	-	1.77	1.81	1.86	-	1.88	1.92	1.97	-	1.97	2.01	2.07	-	2.05	2.09	2.16	-	2.12	2.16	2.23	-
	Amps	6.1	6.3	6.5	-	6.6	6.8	7.0	-	7.2	7.4	7.6	-	7.7	7.9	8.2	-	8.2	8.4	8.7	-	8.7	8.9	9.2	-
	HI PR	231	249	263	-	260	280	295	-	295	318	336	-	336	362	382	-	379	407	430	-	418	450	475	-
	LO PR	104	111	121	-	110	117	128	-	114	122	133	-	120	128	140	-	126	134	146	-	130	139	151	-

700	MBh	20.5	21.1	22.9	24.6	20.1	20.7	22.4	24.0	19.6	20.2	21.8	23.4	19.1	19.7	21.3	22.9	18.2	18.7	20.2	21.7	16.8	17.3	18.7	20.1
	S/T	0.78	0.70	0.53	0.34	0.81	0.72	0.55	0.35	0.83	0.74	0.56	0.36	0.85	0.76	0.58	0.37	0.89	0.79	0.60	0.39	0.89	0.80	0.60	0.39
	ΔT	21	19	16	11	21	20	16	11	21	20	16	11	21	20	16	11	21	19	16	11	20	18	15	10
	kW	1.62	1.65	1.70	1.75	1.73	1.77	1.82	1.88	1.83	1.87	1.93	1.99	1.92	1.96	2.02	2.09	2.00	2.04	2.11	2.17	2.07	2.11	2.18	2.25
	Amps	6.0	6.1	6.3	6.5	6.4	6.6	6.8	7.1	7.0	7.2	7.4	7.7	7.5	7.7	7.9	8.2	8.0	8.2	8.4	8.8	8.4	8.7	8.9	9.3
	HI PR	225	242	255	266	252	271	286	299	287	308	326	340	326	351	371	387	367	395	417	435	406	437	461	481
800	LO PR	101	108	117	125	107	114	124	132	111	118	129	137	117	124	135	144	122	130	142	151	126	134	147	156
	MBh	22.3	22.9	24.8	26.6	21.7	22.4	24.2	26.0	21.2	21.8	23.6	25.4	20.7	21.3	23.1	24.8	19.7	20.2	21.9	23.5	18.2	18.8	20.3	21.8
	S/T	0.81	0.72	0.55	0.35	0.84	0.75	0.57	0.36	0.86	0.77	0.58	0.37	0.89	0.79	0.60	0.39	0.92	0.82	0.62	0.40	0.93	0.83	0.63	0.40
	ΔT	21	19	16	11	21	19	16	11	21	19	16	11	21	19	16	11	21	19	16	11	19	18	15	10
	kW	1.65	1.69	1.74	1.79	1.77	1.81	1.86	1.92	1.88	1.92	1.98	2.04	1.97	2.01	2.07	2.14	2.05	2.09	2.16	2.23	2.12	2.16	2.23	2.30
	Amps	6.1	6.3	6.5	6.7	6.6	6.8	7.0	7.3	7.2	7.4	7.6	7.9	7.7	7.9	8.2	8.5	8.2	8.4	8.7	9.0	8.7	8.9	9.2	9.6
900	HI PR	232	249	263	274	260	280	295	308	295	318	336	350	337	362	382	399	379	407	430	449	418	450	475	496
	LO PR	104	111	121	129	110	117	128	136	114	122	133	142	120	128	140	149	126	134	146	156	130	139	151	161
	MBh	22.9	23.6	25.5	27.4	22.4	23.0	24.9	26.8	21.9	22.5	24.4	26.1	21.3	22.0	23.8	25.5	20.3	20.9	22.6	24.2	18.8	19.3	20.9	22.4
	S/T	0.85	0.76	0.57	0.37	0.88	0.78	0.59	0.38	0.90	0.80	0.61	0.39	0.93	0.83	0.63	0.40	0.96	0.86	0.65	0.42	0.97	0.87	0.66	0.42
	ΔT	20	18	15	10	20	18	15	10	20	18	15	10	20	19	15	11	20	18	15	10	19	17	14	10
	kW	1.67	1.70	1.75	1.80	1.79	1.82	1.88	1.94	1.89	1.93	1.99	2.05	1.99	2.03	2.09	2.16	2.07	2.11	2.18	2.25	2.13	2.18	2.25	2.32
75	Amps	6.2	6.3	6.5	6.8	6.7	6.8	7.1	7.3	7.3	7.4	7.7	8.0	7.8	8.0	8.2	8.5	8.3	8.5	8.8	9.1	8.8	9.0	9.3	9.7
	HI PR	234	252	266	277	262	282	298	311	298	321	339	354	340	366	386	403	382	412	435	453	423	455	480	501
	LO PR	105	112	122	130	111	118	129	138	116	123	134	143	121	129	141	150	127	135	148	157	132	140	153	163

IDB: Entering Indoor Dry Bulb Temperature

High and low pressures are measured at the liquid and suction service valves.

Shaded area reflects ACCA (TVA) conditions

kW = Total system power
Amps = outdoor unit amps (comp.+fan)

IDB		AIRFLOW		OUTDOOR AMBIENT TEMPERATURE																																															
				65°F								75°F								85°F								95°F								105°F								115°F							
				ENTERING INDOOR WET BULB TEMPERATURE																																															
700	MBh	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71																		
	S/T	20.9	21.4	22.8	24.4	20.4	20.9	22.3	23.8	19.9	20.4	21.8	23.3	19.4	19.9	21.2	22.7	18.5	18.9	20.2	21.6	17.1	17.5	18.7	20.0	17.1	17.5	18.7	20.0	17.1	17.5	18.7	20.0																		
	ΔT	23	22	20	16	24	23	20	16	24	23	20	16	24	23	20	16	24	23	20	16	24	23	20	16	24	23	20	16	24	23	20	16																		
	kW	1.63	1.66	1.71	1.8	1.74	1.78	1.83	1.89	1.85	1.89	1.94	2.0	1.94	1.98	2.04	2.11	2.02	2.06	2.12	2.2	2.08	2.13	2.19	2.27	2.08	2.13	2.19	2.27	2.08	2.13	2.19	2.27																		
	Amps	6.0	6.2	6.4	6.6	6.5	6.7	6.9	7.1	7.1	7.2	7.5	7.8	7.6	7.7	8.0	8.3	8.0	8.2	8.5	8.8	8.5	8.7	9.0	9.4	8.5	8.7	9.0	9.4	8.5	8.7	9.0	9.4																		
	Hi PR	227	244	258	268.9	255	274	289	302	290	312	329	343.1	330	355	375	391	371	399	422	439.7	410	441	466	486	410	441	466	486	410	441	466	486																		
800	LO PR	102	109	119	126.3	108	115	125	133	112	119	130	138.7	118	125	137	146	123	131	143	152.7	128	136	148	158	128	136	148	158	128	136	148	158																		
	MBh	22.6	23.1	24.7	26.4	22.1	22.6	24.2	25.8	21.6	22.1	23.6	25.2	21.1	21.5	23.0	24.6	20.0	20.5	21.9	23.4	18.5	18.9	20.2	21.6	18.5	18.9	20.2	21.6	18.5	18.9	20.2	21.6																		
	S/T	0.88	0.83	0.68	0.5	0.92	0.86	0.70	0.52	0.94	0.88	0.72	0.5	0.97	0.91	0.74	0.55	1.00	0.94	0.77	0.6	1.00	0.95	0.78	0.58	1.00	0.95	0.78	0.58	1.00	0.95	0.78	0.58																		
	ΔT	23	22	19	15	23	22	19	16	23	22	19	16	24	23	20	16	23	22	19	15	21	21	18	14	23	22	19	15	21	21	18	14																		
	kW	1.67	1.70	1.75	1.8	1.79	1.82	1.88	1.94	1.89	1.93	1.99	2.1	1.99	2.03	2.09	2.16	2.07	2.11	2.18	2.2	2.13	2.18	2.25	2.32	2.13	2.18	2.25	2.32	2.13	2.18	2.25	2.32																		
	Amps	6.2	6.3	6.5	6.8	6.7	6.8	7.1	7.3	7.3	7.4	7.7	8.0	7.8	8.0	8.2	8.5	8.3	8.5	8.8	9.1	8.8	9.0	9.3	9.7	8.8	9.0	9.3	9.7	8.8	9.0	9.3	9.7																		
900	Hi PR	234	252	266	277.2	262	282	298	311	298	321	339	353.8	340	366	386	403	382	412	435	453.3	423	455	480	501	423	455	480	501	423	455	480	501																		
	LO PR	105	112	122	130.2	111	118	129	138	116	123	134	143.0	121	129	141	150	127	135	148	157.4	132	140	153	163	132	140	153	163	132	140	153	163																		
	MBh	23.3	23.8	25.5	27.2	22.8	23.3	24.9	26.6	22.2	22.7	24.3	26.0	21.7	22.2	23.7	25.3	20.6	21.1	22.5	24.1	19.1	19.5	20.8	22.3	19.1	19.5	20.8	22.3	19.1	19.5	20.8	22.3																		
	S/T	0.93	0.87	0.71	0.5	0.96	0.90	0.73	0.55	1.00	0.92	0.75	0.6	1.00	0.95	0.78	0.58	1.00	1.00	0.81	0.6	1.00	1.00	0.81	0.61	1.00	1.00	0.81	0.6	1.00	1.00	0.81	0.61																		
	ΔT	22	21	18	15	22	21	19	15	23	21	19	15	22	22	19	15	21	22	19	15	20	20	17	14	21	22	19	15	20	20	17	14																		
	kW	1.68	1.71	1.76	1.8	1.80	1.84	1.89	1.95	1.91	1.95	2.01	2.1	2.00	2.04	2.11	2.17	2.08	2.13	2.19	2.3	2.15	2.20	2.27	2.34	2.15	2.20	2.27	2.34	2.15	2.20	2.27	2.34																		
	Amps	6.2	6.4	6.6	6.8	6.7	6.9	7.1	7.4	7.3	7.5	7.8	8.1	7.8	8.0	8.3	8.6	8.3	8.6	8.8	9.2	8.9	9.1	9.4	9.7	8.9	9.1	9.4	9.7	8.9	9.1	9.4	9.7																		
	Hi PR	236	254	268	280.0	265	285	301	314	301	324	343	357.3	343	369	390	407	386	416	439	457.8	427	459	485	506	427	459	485	506	427	459	485	506																		
	LO PR	106	113	123	131.5	112	119	130	139	117	124	136	144.4	123	130	142	152	129	137	149	158.9	133	141	154	164	133	141	154	164	133	141	154	164																		

700	MBh	21.3	21.7	22.7	24.2	20.8	21.2	22.2	23.7	20.3	20.7	21.7	23.1	19.8	20.2	21.1	22.5	18.8	19.2	20.1	21.4	17.4	17.7	18.6	19.8
	S/T	0.89	0.86	0.78	0.63	0.93	0.89	0.81	0.65	0.95	0.92	0.83	0.67	0.98	0.95	0.85	0.69	1.00	0.98	0.89	0.72	1.00	0.99	0.89	0.73
	ΔT	25	25	23	20	25	25	24	20	25	25	24	20	25	25	24	21	25	25	23	20	23	23	22	19
	kW	1.64	1.67	1.72	1.77	1.76	1.79	1.85	1.90	1.86	1.90	1.96	2.02	1.95	1.99	2.06	2.12	2.03	2.08	2.14	2.21	2.10	2.14	2.21	2.28
	Amps	6.1	6.2	6.4	6.7	6.6	6.7	6.9	7.2	7.1	7.3	7.5	7.8	7.6	7.8	8.1	8.4	8.1	8.3	8.6	8.9	8.6	8.8	9.1	9.5
	HiPR	229	247	260	272	257	277	292	305	292	315	332	347	333	358	378	395	375	403	426	444	414	445	470	491
LOPR	103	110	120	128	109	116	127	135	113	120	132	140	119	127	138	147	125	133	145	154	129	137	150	159	
800	MBh	23.0	23.5	24.6	26.2	22.5	22.9	24.0	25.6	22.0	22.4	23.5	25.0	21.4	21.9	22.9	24.4	20.4	20.8	21.7	23.2	18.9	19.2	20.1	21.5
	S/T	0.93	0.90	0.81	0.66	0.96	0.93	0.84	0.68	0.99	0.95	0.86	0.70	1.00	0.98	0.89	0.72	1.00	1.00	0.92	0.75	1.00	1.00	0.93	0.75
	ΔT	25	24	23	20	25	24	23	20	25	24	23	20	25	25	23	20	23	24	23	20	22	22	21	19
	kW	1.68	1.71	1.76	1.82	1.80	1.84	1.89	1.95	1.91	1.95	2.01	2.07	2.00	2.04	2.11	2.17	2.08	2.13	2.19	2.26	2.15	2.20	2.27	2.34
	Amps	6.2	6.4	6.6	6.8	6.7	6.9	7.1	7.4	7.3	7.5	7.8	8.1	7.8	8.0	8.3	8.6	8.3	8.6	8.8	9.2	8.9	9.1	9.4	9.7
	HiPR	236	254	268	280	265	285	301	314	301	324	343	357	343	369	390	407	386	416	439	458	427	459	485	506
LOPR	106	113	123	131	112	119	130	139	117	124	136	144	123	130	142	152	129	137	149	159	133	141	154	164	
900	MBh	23.7	24.2	25.3	27.0	23.2	23.6	24.8	26.4	22.6	23.1	24.2	25.8	22.1	22.5	23.6	25.1	21.0	21.4	22.4	23.9	19.4	19.8	20.7	22.1
	S/T	0.97	0.94	0.85	0.69	1.00	0.97	0.88	0.71	1.00	1.00	0.90	0.73	1.00	1.00	0.93	0.75	1.00	1.00	0.96	0.78	1.00	1.00	0.97	0.79
	ΔT	24	23	22	19	24	23	22	19	23	24	22	19	23	23	22	19	21	22	22	19	20	20	21	18
	kW	1.69	1.72	1.78	1.83	1.81	1.85	1.91	1.97	1.92	1.96	2.02	2.09	2.02	2.06	2.12	2.19	2.10	2.14	2.21	2.28	2.17	2.22	2.29	2.36
	Amps	6.3	6.4	6.7	6.9	6.8	7.0	7.2	7.5	7.4	7.6	7.8	8.1	7.9	8.1	8.4	8.7	8.4	8.6	8.9	9.3	8.9	9.2	9.5	9.8
	HiPR	239	257	271	283	268	288	304	317	304	328	346	361	347	373	394	411	390	420	443	462	431	464	490	511
LOPR	107	114	125	133	113	121	132	140	118	125	137	146	124	132	144	153	130	138	151	161	134	143	156	166	

IDB		AIRFLOW		OUTDOOR AMBIENT TEMPERATURE																																			
				65°F						75°F						85°F						95°F						105°F						115°F					
				ENTERING INDOOR WET BULB TEMPERATURE																																			
900	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71											
	MBh	22.5	23.4	25.6	-	22.0	22.8	25.0	-	21.5	22.3	24.4	-	21.0	21.7	23.8	-	19.9	20.6	22.6	-	18.4	19.1	21.0	-	18.4	19.1	21.0	-										
	S/T	0.73	0.61	0.42	-	0.76	0.63	0.44	-	0.78	0.65	0.45	-	0.80	0.67	0.46	-	0.83	0.69	0.48	-	0.84	0.70	0.49	-	0.84	0.70	0.49	-										
	ΔT	17	15	11	-	17	15	11	-	17	15	11	-	17	15	11	-	17	15	11	-	16	14	10	-	16	14	10	-										
	kW	1.63	1.66	1.71	-	1.75	1.78	1.83	-	1.85	1.89	1.95	-	1.94	1.98	2.04	-	2.02	2.06	2.13	-	2.09	2.13	2.20	-	2.09	2.13	2.20	-										
800	Amps <td>5.8</td> <td>6.0</td> <td>6.2</td> <td>-</td> <td>6.3</td> <td>6.4</td> <td>6.7</td> <td>-</td> <td>6.8</td> <td>7.0</td> <td>7.2</td> <td>-</td> <td>7.3</td> <td>7.5</td> <td>7.7</td> <td>-</td> <td>7.8</td> <td>8.0</td> <td>8.2</td> <td>-</td> <td>8.2</td> <td>8.4</td> <td>8.7</td> <td>-</td> <td>8.2</td> <td>8.4</td> <td>8.7</td> <td>-</td>	5.8	6.0	6.2	-	6.3	6.4	6.7	-	6.8	7.0	7.2	-	7.3	7.5	7.7	-	7.8	8.0	8.2	-	8.2	8.4	8.7	-	8.2	8.4	8.7	-										
	Hi PR <td>228</td> <td>246</td> <td>259</td> <td>-</td> <td>256</td> <td>276</td> <td>291</td> <td>-</td> <td>291</td> <td>314</td> <td>331</td> <td>-</td> <td>332</td> <td>357</td> <td>377</td> <td>-</td> <td>373</td> <td>402</td> <td>424</td> <td>-</td> <td>413</td> <td>444</td> <td>469</td> <td>-</td> <td>413</td> <td>444</td> <td>469</td> <td>-</td>	228	246	259	-	256	276	291	-	291	314	331	-	332	357	377	-	373	402	424	-	413	444	469	-	413	444	469	-										
	Lo PR <td>105</td> <td>112</td> <td>122</td> <td>-</td> <td>111</td> <td>118</td> <td>129</td> <td>-</td> <td>115</td> <td>123</td> <td>134</td> <td>-</td> <td>121</td> <td>129</td> <td>141</td> <td>-</td> <td>127</td> <td>135</td> <td>147</td> <td>-</td> <td>131</td> <td>140</td> <td>152</td> <td>-</td> <td>131</td> <td>140</td> <td>152</td> <td>-</td>	105	112	122	-	111	118	129	-	115	123	134	-	121	129	141	-	127	135	147	-	131	140	152	-	131	140	152	-										
	MBh	21.9	22.7	24.8	-	21.4	22.2	24.3	-	20.9	21.6	23.7	-	20.4	21.1	23.1	-	19.3	20.0	22.0	-	17.9	18.6	20.3	-	17.9	18.6	20.3	-										
	S/T	0.70	0.58	0.40	-	0.72	0.60	0.42	-	0.74	0.62	0.43	-	0.76	0.64	0.44	-	0.79	0.66	0.46	-	0.80	0.67	0.46	-	0.80	0.67	0.46	-										
700	ΔT	18	15	12	-	18	15	12	-	18	15	12	-	18	15	12	-	18	15	12	-	16	14	11	-	16	14	11	-										
	kW	1.62	1.65	1.70	-	1.73	1.77	1.82	-	1.84	1.87	1.93	-	1.93	1.97	2.03	-	2.00	2.05	2.11	-	2.07	2.11	2.18	-	2.07	2.11	2.18	-										
	Amps	5.8	5.9	6.1	-	6.2	6.4	6.6	-	6.8	6.9	7.2	-	7.2	7.4	7.7	-	7.7	7.9	8.1	-	8.2	8.4	8.6	-	8.2	8.4	8.6	-										
	Hi PR	226	243	257	-	254	273	288	-	288	310	328	-	329	354	373	-	370	398	420	-	408	440	464	-	408	440	464	-										
	Lo PR	104	111	121	-	110	117	127	-	114	121	132	-	120	127	139	-	126	134	146	-	130	138	151	-	130	138	151	-										
70	MBh	20.2	20.9	22.9	-	19.7	20.4	22.4	-	19.3	20.0	21.9	-	18.8	19.5	21.3	-	17.8	18.5	20.3	-	16.5	17.1	18.8	-	16.5	17.1	18.8	-										
	S/T	0.67	0.56	0.39	-	0.70	0.58	0.40	-	0.71	0.60	0.41	-	0.74	0.62	0.43	-	0.76	0.64	0.44	-	0.77	0.64	0.45	-	0.77	0.64	0.45	-										
	ΔT	18	15	12	-	18	16	12	-	18	16	12	-	18	16	12	-	18	16	12	-	17	14	11	-	17	14	11	-										
	kW	1.58	1.61	1.66	-	1.69	1.73	1.78	-	1.79	1.83	1.89	-	1.88	1.92	1.98	-	1.96	2.00	2.06	-	2.02	2.06	2.13	-	2.02	2.06	2.13	-										
	Amps	5.6	5.7	5.9	-	6.1	6.2	6.4	-	6.6	6.7	7.0	-	7.0	7.2	7.4	-	7.5	7.7	7.9	-	7.9	8.1	8.4	-	7.9	8.1	8.4	-										
70	Hi PR	219	236	249	-	246	265	280	-	280	301	318	-	319	343	362	-	359	386	407	-	396	426	450	-	396	426	450	-										
	Lo PR	101	107	117	-	106	113	124	-	111	118	129	-	116	124	135	-	122	130	141	-	126	134	146	-	126	134	146	-										

75	900	MBh	22.9	23.6	25.5	27.4	22.4	23.0	24.9	26.8	21.9	22.5	24.4	26.1	21.3	22.0	23.8	25.5	20.3	20.9	22.6	24.2	18.8	19.3	20.9	22.4
		S/T	0.83	0.74	0.56	0.36	0.86	0.77	0.58	0.37	0.88	0.79	0.60	0.38	0.91	0.81	0.62	0.40	0.95	0.85	0.64	0.41	0.95	0.85	0.65	0.42
		ΔT	19	18	15	10	20	18	15	10	20	18	15	10	20	18	15	10	20	18	15	10	18	17	14	10
		kW	1.64	1.67	1.72	1.77	1.76	1.79	1.85	1.91	1.86	1.90	1.96	2.02	1.96	2.00	2.06	2.13	2.04	2.08	2.15	2.21	2.10	2.15	2.22	2.29
		Amps	5.9	6.0	6.2	6.4	6.3	6.5	6.7	7.0	6.9	7.1	7.3	7.6	7.4	7.5	7.8	8.1	7.8	8.0	8.3	8.6	8.3	8.5	8.8	9.1
800	Hi PR	231	248	262	273	259	279	294	307	294	317	334	349	335	361	381	397	377	406	429	447	417	448	474	494	
	Lo PR	106	113	123	131	112	119	130	139	116	124	135	144	122	130	142	151	128	136	149	158	133	141	154	164	
	MBh	22.3	22.9	24.8	26.6	21.7	22.4	24.2	26.0	21.2	21.8	23.6	25.4	20.7	21.3	23.1	24.8	19.7	20.2	21.9	23.5	18.2	18.8	20.3	21.8	
	S/T	0.79	0.71	0.54	0.34	0.82	0.73	0.56	0.36	0.84	0.75	0.57	0.37	0.87	0.78	0.59	0.38	0.90	0.81	0.61	0.39	0.91	0.81	0.62	0.40	
	ΔT	20	19	15	11	20	19	15	11	21	19	15	11	21	19	16	11	20	19	15	11	19	18	14	10	
700	kW	1.63	1.66	1.71	1.76	1.75	1.78	1.84	1.89	1.85	1.89	1.95	2.01	1.94	1.98	2.04	2.11	2.02	2.06	2.13	2.20	2.09	2.13	2.20	2.27	
	Amps	5.8	6.0	6.2	6.4	6.3	6.4	6.7	6.9	6.8	7.0	7.2	7.5	7.3	7.5	7.7	8.0	7.8	8.0	8.2	8.5	8.2	8.4	8.7	9.1	
	Hi PR	228	246	260	271	256	276	291	304	291	314	331	345	332	357	377	393	373	402	424	443	413	444	469	489	
	Lo PR	105	112	122	130	111	118	129	137	115	123	134	143	121	129	141	150	127	135	147	157	131	140	152	162	
	MBh	20.5	21.1	22.9	24.6	20.1	20.7	22.4	24.0	19.6	20.2	21.8	23.4	19.1	19.7	21.3	22.9	18.2	18.7	20.2	21.7	16.8	17.3	18.7	20.1	
75	S/T	0.76	0.68	0.52	0.33	0.79	0.71	0.54	0.34	0.81	0.73	0.55	0.35	0.84	0.75	0.57	0.36	0.87	0.78	0.59	0.38	0.88	0.78	0.59	0.38	
	ΔT	21	19	16	11	21	19	16	11	21	19	16	11	21	19	16	11	21	19	16	11	19	18	15	10	
	kW	1.59	1.62	1.67	1.72	1.71	1.74	1.79	1.85	1.81	1.84	1.90	1.96	1.90	1.94	2.00	2.06	1.97	2.01	2.08	2.14	2.04	2.08	2.15	2.22	
	Amps	5.7	5.8	6.0	6.2	6.1	6.3	6.5	6.7	6.6	6.8	7.0	7.3	7.1	7.3	7.5	7.8	7.6	7.7	8.0	8.3	8.0	8.2	8.5	8.8	
	Hi PR	222	238	252	263	249	267	282	295	283	304	321	335	322	346	366	382	362	390	412	429	400	431	455	474	
75	Lo PR	102	108	118	126	108	114	125	133	112	119	130	138	117	125	136	145	123	131	143	152	127	135	148	157	

		OUTDOOR AMBIENT TEMPERATURE																																				
		65°F						75°F						85°F						95°F						105°F						115°F						
IDB	AIRFLOW	59	63	67	71	75	79	83	87	91	95	99	103	107	111	115	119	123	127	131	135	139	143	147	151	155	159	163	167	171	175	179	183	187	191			
80	900	MBh	23.3	23.8	25.5	27.2	28.8	30.3	31.8	33.3	34.8	36.3	37.8	39.3	40.8	42.3	43.8	45.3	46.8	48.3	49.8	51.3	52.8	54.3	55.8	57.3	58.8	60.3	61.8	63.3	64.8	66.3	67.8	69.3	70.8	72.3		
		S/T	0.91	0.85	0.69	0.52	0.94	0.88	0.72	0.54	0.97	0.91	0.74	0.55	1.00	0.94	0.76	0.57	1.00	0.94	0.76	0.57	1.00	0.94	0.76	0.57	1.00	0.94	0.76	0.57	1.00	0.94	0.76	0.57	1.00	0.94	0.76	0.57
		ΔT	22	21	18	14	22	21	18	15	22	21	18	15	22	21	18	15	22	21	18	15	22	21	18	15	22	21	18	15	22	21	18	15	22	21	18	14
		kW	1.65	1.69	1.74	1.79	1.77	1.81	1.86	1.92	1.88	1.92	1.98	2.04	1.97	2.01	2.08	2.14	2.05	2.10	2.16	2.23	2.12	2.17	2.24	2.31	2.12	2.17	2.24	2.31	2.12	2.17	2.24	2.31	2.12	2.17	2.24	2.31
		Amps	5.9	6.1	6.3	6.5	6.4	6.6	6.8	7.0	7.0	7.1	7.4	7.6	7.4	7.6	7.9	8.2	7.9	8.1	8.4	8.7	8.4	8.6	8.9	9.2	8.4	8.6	8.9	9.2	8.4	8.6	8.9	9.2	8.4	8.6	8.9	9.2
		Hi PR	233	251	265	276	261	281	297	310	297	320	338	352	339	364	385	401	381	410	433	452	421	453	478	499	421	453	478	499	421	453	478	499	421	453	478	499
80	800	Lo PR	107	114	124	132	113	120	131	140	118	125	137	145	123	131	143	153	129	138	150	160	134	142	155	166	134	142	155	166	134	142	155	166	134	142	155	166
		MBh	22.6	23.1	24.7	26.4	22.1	22.6	24.2	25.8	21.6	22.1	23.6	25.2	21.1	21.5	23.0	24.6	20.0	20.5	21.9	23.4	18.5	18.9	20.2	21.6	18.5	18.9	20.2	21.6	18.5	18.9	20.2	21.6	18.5	18.9	20.2	21.6
		S/T	0.87	0.81	0.66	0.50	0.90	0.84	0.69	0.51	0.92	0.87	0.70	0.53	0.95	0.89	0.73	0.54	0.99	0.93	0.75	0.56	1.00	0.93	0.76	0.57	1.00	0.93	0.76	0.57	1.00	0.93	0.76	0.57	1.00	0.93	0.76	0.57
		ΔT	23	22	19	15	23	22	19	15	23	22	19	15	23	22	19	15	23	22	19	15	21	20	18	14	21	20	18	14	21	20	18	14	21	20	18	14
		kW	1.64	1.67	1.72	1.78	1.76	1.79	1.85	1.91	1.86	1.90	1.96	2.02	1.96	2.00	2.06	2.13	2.04	2.08	2.15	2.21	2.10	2.15	2.22	2.29	2.10	2.15	2.22	2.29	2.10	2.15	2.22	2.29	2.10	2.15	2.22	2.29
		Amps	5.9	6.0	6.2	6.4	6.3	6.5	6.7	7.0	6.9	7.1	7.3	7.6	7.4	7.5	7.8	8.1	7.8	8.0	8.3	8.6	8.3	8.5	8.8	9.1	8.3	8.5	8.8	9.1	8.3	8.5	8.8	9.1	8.3	8.5	8.8	9.1
700	700	Hi PR	231	248	262	273	259	279	294	307	294	317	335	349	335	361	381	397	377	406	429	447	417	448	474	494	417	448	474	494	417	448	474	494	417	448	474	494
		Lo PR	106	113	123	131	112	119	130	139	116	124	135	144	122	130	142	151	128	136	149	158	133	141	154	164	133	141	154	164	133	141	154	164	133	141	154	164
		MBh	20.9	21.4	22.8	24.4	20.4	20.9	22.3	23.8	19.9	20.4	21.8	23.3	19.4	19.9	21.2	22.7	18.5	18.9	20.2	21.6	17.1	17.5	18.7	20.0	17.1	17.5	18.7	20.0	17.1	17.5	18.7	20.0	17.1	17.5	18.7	20.0
		S/T	0.84	0.79	0.64	0.48	0.87	0.81	0.66	0.50	0.89	0.83	0.68	0.51	0.92	0.86	0.70	0.52	0.95	0.89	0.73	0.54	0.96	0.90	0.73	0.55	0.96	0.90	0.73	0.55	0.96	0.90	0.73	0.55	0.96	0.90	0.73	0.55
		ΔT	23	22	19	15	23	22	19	15	23	22	19	16	23	22	20	16	23	22	19	15	22	21	18	14	22	21	18	14	22	21	18	14	22	21	18	14
		kW	1.60	1.63	1.68	1.73	1.72	1.75	1.81	1.86	1.82	1.86	1.92	1.98	1.91	1.95	2.01	2.08	1.99	2.03	2.09	2.16	2.05	2.10	2.16	2.23	2.05	2.10	2.16	2.23	2.05	2.10	2.16	2.23	2.05	2.10	2.16	2.23
700	700	Amps	5.7	5.9	6.0	6.3	6.2	6.3	6.5	6.8	6.7	6.9	7.1	7.4	7.2	7.3	7.6	7.9	7.6	7.8	8.1	8.4	8.1	8.3	8.6	8.9	8.1	8.3	8.6	8.9	8.1	8.3	8.6	8.9	8.1	8.3	8.6	8.9
		Hi PR	224	241	254	265	251	270	285	298	286	307	324	338	325	350	370	385	366	394	416	434	404	435	459	479	404	435	459	479	404	435	459	479	404	435	459	479
		Lo PR	103	109	119	127	109	116	126	134	113	120	131	140	119	126	138	147	124	132	144	154	129	137	149	159	129	137	149	159	129	137	149	159	129	137	149	159

900	MBh	23.7	24.2	25.3	27.0	23.2	23.6	24.8	26.4	22.6	23.1	24.2	25.8	22.1	22.5	23.6	25.1	21.0	21.4	22.4	23.9	19.4	19.8	20.7	22.1
	S/T	0.95	0.92	0.83	0.67	0.99	0.95	0.86	0.70	1.00	0.98	0.88	0.72	1.00	1.00	0.91	0.74	1.00	1.00	0.95	0.77	1.00	1.00	0.95	0.77
	ΔT	23	23	22	19	23	23	22	19	23	23	22	19	23	23	22	19	21	22	22	19	20	20	20	17
	kW	1.66	1.70	1.75	1.80	1.79	1.82	1.88	1.94	1.89	1.93	1.99	2.06	1.99	2.03	2.09	2.16	2.07	2.11	2.18	2.25	2.14	2.18	2.25	2.33
	Amps	6.0	6.1	6.3	6.6	6.5	6.6	6.8	7.1	7.0	7.2	7.4	7.7	7.5	7.7	7.9	8.2	8.0	8.2	8.5	8.8	8.5	8.7	9.0	9.3
	Hi PR	235	253	267	279	264	284	300	313	300	323	341	356	342	368	389	405	385	414	437	456	425	457	483	504
	Lo PR	108	115	126	134	114	122	133	141	119	126	138	147	125	133	145	154	131	139	152	162	135	144	157	167
800	MBh	23.0	23.5	24.6	26.2	22.5	22.9	24.0	25.6	22.0	22.4	23.5	25.0	21.4	21.9	22.9	24.4	20.4	20.8	21.7	23.2	18.9	19.2	20.1	21.5
	S/T	0.91	0.88	0.79	0.64	0.94	0.91	0.82	0.67	0.97	0.93	0.84	0.68	1.00	0.96	0.87	0.71	1.00	1.00	0.90	0.73	1.00	1.00	0.91	0.74
	ΔT	24	24	22	19	24	24	23	20	24	24	23	20	25	24	23	20	23	24	23	20	22	22	21	18
	kW	1.65	1.69	1.74	1.79	1.77	1.81	1.86	1.92	1.88	1.92	1.98	2.04	1.97	2.01	2.08	2.14	2.05	2.10	2.16	2.23	2.12	2.17	2.24	2.31
	Amps	5.9	6.1	6.3	6.5	6.4	6.6	6.8	7.0	7.0	7.1	7.4	7.6	7.4	7.6	7.9	8.2	7.9	8.1	8.4	8.7	8.4	8.6	8.9	9.2
	Hi PR	233	251	265	276	261	281	297	310	297	320	338	352	339	364	385	401	381	410	433	452	421	453	478	499
	Lo PR	107	114	124	132	113	120	131	140	118	125	137	145	123	131	143	153	129	138	150	160	134	142	155	166
700	MBh	21.3	21.7	22.7	24.2	20.8	21.2	22.2	23.7	20.3	20.7	21.7	23.1	19.8	20.2	21.1	22.5	18.8	19.2	20.1	21.4	17.4	17.7	18.6	19.8
	S/T	0.88	0.85	0.76	0.62	0.91	0.88	0.79	0.64	0.93	0.90	0.81	0.66	0.96	0.93	0.84	0.68	1.00	0.96	0.87	0.71	1.00	0.97	0.88	0.71
	ΔT	25	24	23	20	25	24	23	20	25	24	23	20	25	25	23	20	25	24	23	20	23	23	21	19
	kW	1.61	1.65	1.70	1.75	1.73	1.77	1.82	1.88	1.83	1.87	1.93	1.99	1.93	1.97	2.03	2.09	2.00	2.05	2.11	2.18	2.07	2.11	2.18	2.25
	Amps	5.8	5.9	6.1	6.3	6.2	6.4	6.6	6.8	6.8	6.9	7.2	7.4	7.2	7.4	7.7	7.9	7.7	7.9	8.1	8.5	8.2	8.4	8.6	9.0
	Hi PR	226	243	257	268	254	273	288	301	288	310	328	342	328	353	373	389	370	398	420	438	408	439	464	484
	Lo PR	104	110	121	128	110	117	127	136	114	121	132	141	120	127	139	148	126	134	146	155	130	138	151	161

IDB: Entering Indoor Dry Bulb Temperature
 High and low pressures are measured at the liquid and suction service valves.
 Shaded area reflects AHRI conditions
 Amps = outdoor unit amps (comp.+fan)
 kW = Total system power

		OUTDOOR AMBIENT TEMPERATURE																																			
		65°F						75°F						85°F						95°F						105°F						115°F					
IDB	AIRFLOW	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71								
70	875	MBh	24.9	25.8	28.3	-	24.4	25.2	27.7	-	23.8	24.6	27.0	-	23.2	24.0	26.3	-	22.0	22.8	25.0	-	20.4	21.2	23.2	-	20.4	21.2	23.2	-							
		S/T	0.72	0.60	0.42	-	0.74	0.62	0.43	-	0.76	0.64	0.44	-	0.79	0.66	0.46	-	0.82	0.68	0.47	-	0.82	0.69	0.48	-	0.82	0.69	0.48	-							
		ΔT	19	16	12	-	19	16	13	-	19	16	13	-	19	17	13	-	19	16	12	-	18	15	12	-	18	15	12	-							
		kW	1.60	1.64	1.70	-	1.74	1.78	1.85	-	1.87	1.91	1.98	-	1.97	2.02	2.10	-	2.07	2.12	2.20	-	2.15	2.20	2.28	-	2.15	2.20	2.28	-							
		Amps	6.6	6.8	7.0	-	7.2	7.4	7.7	-	7.9	8.1	8.4	-	8.5	8.7	9.0	-	9.1	9.3	9.6	-	9.6	9.9	10.2	-	9.6	9.9	10.2	-							
		Hi PR	209	224	237	-	234	252	266	-	266	286	303	-	303	326	345	-	341	367	388	-	377	406	428	-	377	406	428	-							
		Lo PR	103	109	119	-	109	116	126	-	113	120	131	-	119	126	138	-	124	132	144	-	128	137	149	-	128	137	149	-							
70	1050	MBh	27.0	28.0	30.7	-	26.4	27.4	30.0	-	25.8	26.7	29.3	-	25.1	26.1	28.5	-	23.9	24.7	27.1	-	22.1	22.9	25.1	-	22.1	22.9	25.1	-							
		S/T	0.74	0.62	0.43	-	0.77	0.64	0.45	-	0.79	0.66	0.46	-	0.82	0.68	0.47	-	0.85	0.71	0.49	-	0.85	0.71	0.49	-	0.85	0.71	0.49	-							
		ΔT	18	15	12	-	18	15	12	-	18	15	12	-	18	16	12	-	18	15	12	-	17	14	11	-	17	14	11	-							
		kW	1.65	1.69	1.75	-	1.79	1.83	1.90	-	1.92	1.97	2.04	-	2.03	2.08	2.16	-	2.13	2.18	2.26	-	2.21	2.26	2.35	-	2.21	2.26	2.35	-							
		Amps	6.8	7.0	7.3	-	7.4	7.6	7.9	-	8.1	8.3	8.6	-	8.7	9.0	9.3	-	9.3	9.6	9.9	-	9.9	10.2	10.6	-	9.9	10.2	10.6	-							
		Hi PR	215	231	244	-	241	260	274	-	274	295	312	-	313	336	355	-	352	378	400	-	389	418	442	-	389	418	442	-							
		Lo PR	106	113	123	-	112	119	130	-	116	124	135	-	122	130	142	-	128	136	149	-	132	141	154	-	132	141	154	-							
1125	1125	MBh	27.3	28.3	31.0	-	26.7	27.6	30.3	-	26.0	27.0	29.5	-	25.4	26.3	28.8	-	24.1	25.0	27.4	-	22.3	23.2	25.4	-	22.3	23.2	25.4	-							
		S/T	0.76	0.63	0.44	-	0.79	0.66	0.45	-	0.81	0.67	0.47	-	0.83	0.70	0.48	-	0.86	0.72	0.50	-	0.87	0.73	0.50	-	0.87	0.73	0.50	-							
		ΔT	17	15	11	-	17	15	11	-	17	15	11	-	17	15	11	-	17	15	11	-	16	14	10	-	16	14	10	-							
		kW	1.65	1.69	1.75	-	1.80	1.84	1.91	-	1.92	1.97	2.04	-	2.04	2.09	2.16	-	2.13	2.18	2.26	-	2.21	2.27	2.35	-	2.21	2.27	2.35	-							
		Amps	6.9	7.0	7.3	-	7.5	7.7	7.9	-	8.2	8.4	8.7	-	8.8	9.0	9.3	-	9.4	9.6	10.0	-	10.0	10.2	10.6	-	10.0	10.2	10.6	-							
		Hi PR	216	232	245	-	242	260	275	-	275	296	313	-	314	337	356	-	353	380	401	-	390	419	443	-	390	419	443	-							
		Lo PR	106	113	123	-	112	119	130	-	117	124	136	-	123	130	142	-	128	137	149	-	133	141	154	-	133	141	154	-							

75	MBh	25.4	26.1	28.3	30.3	24.8	25.5	27.6	29.6	24.2	24.9	26.9	28.9	23.6	24.3	26.3	28.2	22.4	23.1	25.0	26.8	20.8	21.4	23.1	24.8
	S/T	0.82	0.73	0.55	0.36	0.85	0.76	0.57	0.37	0.87	0.78	0.59	0.38	0.89	0.80	0.61	0.39	0.93	0.83	0.63	0.40	0.94	0.84	0.63	0.41
	ΔT	22	20	16	11	22	20	17	11	22	20	17	11	22	20	17	12	22	20	16	11	20	19	15	11
	kW	1.62	1.66	1.72	1.78	1.76	1.80	1.87	1.93	1.88	1.93	2.00	2.07	1.99	2.04	2.12	2.19	2.09	2.14	2.22	2.30	2.17	2.22	2.30	2.39
	Amps	6.7	6.9	7.1	7.4	7.3	7.5	7.7	8.1	8.0	8.2	8.5	8.8	8.6	8.8	9.1	9.5	9.2	9.4	9.7	10.1	9.7	10.0	10.4	10.8
	HI PR	211	227	239	250	236	254	269	280	269	289	306	319	306	330	348	363	345	371	392	408	381	410	433	451
	LO PR	104	110	121	128	110	117	127	136	114	121	132	141	120	127	139	148	125	134	146	155	130	138	151	161
	MBh	27.5	28.3	30.6	32.9	26.8	27.6	29.9	32.1	26.2	27.0	29.2	31.3	25.6	26.3	28.5	30.6	24.3	25.0	27.1	29.0	22.5	23.2	25.1	26.9
	S/T	0.85	0.76	0.57	0.37	0.88	0.78	0.59	0.38	0.90	0.80	0.61	0.39	0.93	0.83	0.63	0.40	0.96	0.86	0.65	0.42	0.97	0.87	0.66	0.42
	ΔT	20	19	15	11	21	19	16	11	21	19	16	11	21	19	16	11	20	19	15	11	19	18	14	10
1125	kW	1.66	1.70	1.76	1.83	1.81	1.85	1.92	1.99	1.94	1.98	2.06	2.13	2.05	2.10	2.18	2.26	2.15	2.20	2.28	2.36	2.23	2.28	2.37	2.46
	Amps	6.9	7.1	7.3	7.6	7.5	7.7	8.0	8.3	8.2	8.4	8.7	9.1	8.8	9.1	9.4	9.8	9.4	9.7	10.0	10.4	10.0	10.3	10.7	11.1
	HI PR	217	234	247	257	244	262	277	289	277	298	315	329	316	340	359	374	355	382	404	421	393	422	446	465
	LO PR	107	114	124	132	113	120	131	140	118	125	136	145	123	131	143	153	129	138	150	160	134	142	155	166
	MBh	27.8	28.6	30.9	33.2	27.1	27.9	30.2	32.4	26.5	27.2	29.5	31.6	25.8	26.6	28.8	30.9	24.5	25.3	27.3	29.3	22.7	23.4	25.3	27.2
	S/T	0.86	0.77	0.58	0.38	0.89	0.80	0.61	0.39	0.92	0.82	0.62	0.40	0.95	0.85	0.64	0.41	0.98	0.88	0.66	0.43	0.99	0.89	0.67	0.43
	ΔT	20	18	15	10	20	18	15	10	20	18	15	10	20	18	15	10	20	18	15	10	18	17	14	10
	kW	1.67	1.71	1.77	1.83	1.81	1.86	1.92	1.99	1.94	1.99	2.06	2.14	2.06	2.11	2.18	2.26	2.15	2.21	2.29	2.37	2.24	2.29	2.37	2.46
	Amps	6.9	7.1	7.4	7.7	7.5	7.7	8.0	8.3	8.2	8.5	8.8	9.1	8.9	9.1	9.4	9.8	9.5	9.7	10.1	10.5	10.1	10.3	10.7	11.1
	HI PR	218	234	248	258	245	263	278	290	278	299	316	330	317	341	360	375	356	383	405	422	394	424	447	467
	LO PR	107	114	125	133	113	121	132	140	118	125	137	146	124	132	144	153	130	138	151	161	134	143	156	166

IDB: Entering Indoor Dry Bulb Temperature

High and low pressures are measured at the liquid and suction service valves.

Shaded area reflects ACCA (TVA) conditions

Amps = outdoor unit amps (comp.+fan)

kW = Total system power

		OUTDOOR AMBIENT TEMPERATURE																								
		65°F				75°F				85°F				95°F				105°F				115°F				
IDB	AIRFLOW	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	
70	1050	MBh	29.5	30.6	33.5	-	28.8	29.9	32.7	-	28.1	29.2	31.9	-	27.4	28.4	31.2	-	26.1	27.0	29.6	-	24.2	25.0	27.4	-
		S/T	0.68	0.57	0.39	-	0.70	0.59	0.41	-	0.72	0.60	0.42	-	0.75	0.62	0.43	-	0.77	0.65	0.45	-	0.78	0.65	0.45	-
		ΔT	18	15	12	-	18	15	12	-	18	15	12	-	18	16	12	-	18	15	12	-	17	14	11	-
		kW	2.32	2.37	2.44	-	2.49	2.55	2.63	-	2.65	2.70	2.79	-	2.78	2.84	2.93	-	2.89	2.96	3.05	-	2.99	3.06	3.16	-
		Amps	8.5	8.7	9.0	-	9.2	9.5	9.8	-	10.1	10.3	10.7	-	10.8	11.1	11.4	-	11.5	11.8	12.2	-	12.2	12.5	13.0	-
		HI PR	235	252	267	-	263	283	299	-	299	322	340	-	341	367	387	-	384	413	436	-	424	456	482	-
LO PR	101	107	117	-	107	113	124	-	111	118	129	-	116	124	135	-	122	130	142	-	126	134	146	-		
70	1200	MBh	32.0	33.1	36.3	-	31.2	32.4	35.5	-	30.5	31.6	34.6	-	29.7	30.8	33.8	-	28.2	29.3	32.1	-	26.2	27.1	29.7	-
		S/T	0.71	0.59	0.41	-	0.73	0.61	0.42	-	0.75	0.63	0.43	-	0.77	0.65	0.45	-	0.80	0.67	0.46	-	0.81	0.68	0.47	-
		ΔT	17	15	11	-	17	15	11	-	17	15	11	-	18	15	12	-	17	15	11	-	16	14	11	-
		kW	2.38	2.43	2.50	-	2.56	2.61	2.69	-	2.71	2.77	2.86	-	2.85	2.91	3.00	-	2.97	3.03	3.13	-	3.07	3.14	3.24	-
		Amps	8.8	9.0	9.3	-	9.5	9.7	10.1	-	10.4	10.6	11.0	-	11.1	11.4	11.8	-	11.8	12.1	12.6	-	12.6	12.9	13.3	-
		HI PR	242	260	275	-	271	292	308	-	309	332	351	-	352	378	399	-	395	426	449	-	437	470	497	-
LO PR	104	111	121	-	110	117	128	-	114	121	133	-	120	128	139	-	126	134	146	-	130	138	151	-		
1350		MBh	32.9	34.1	37.4	-	32.2	33.3	36.5	-	31.4	32.5	35.7	-	30.6	31.7	34.8	-	29.1	30.2	33.0	-	27.0	27.9	30.6	-
		S/T	0.74	0.62	0.43	-	0.77	0.64	0.44	-	0.79	0.66	0.45	-	0.81	0.68	0.47	-	0.84	0.70	0.49	-	0.85	0.71	0.49	-
		ΔT	17	14	11	-	17	15	11	-	17	15	11	-	17	15	11	-	17	14	11	-	16	13	10	-
		kW	2.40	2.45	2.52	-	2.58	2.63	2.71	-	2.73	2.79	2.88	-	2.87	2.93	3.03	-	2.99	3.06	3.16	-	3.09	3.16	3.26	-
		Amps	8.8	9.1	9.4	-	9.6	9.8	10.2	-	10.5	10.7	11.1	-	11.2	11.5	11.9	-	12.0	12.3	12.7	-	12.7	13.0	13.5	-
		HI PR	244	263	278	-	274	295	311	-	312	335	354	-	355	382	403	-	399	430	454	-	441	475	501	-
LO PR	105	112	122	-	111	118	129	-	115	123	134	-	121	129	141	-	127	135	147	-	131	140	152	-		

75	1050	MBh	30.0	30.9	33.4	35.9	29.3	30.2	32.7	35.1	28.6	29.5	31.9	34.2	27.9	28.7	31.1	33.4	26.5	27.3	29.6	31.7	24.6	25.3	27.4	29.4
		S/T	0.77	0.69	0.52	0.34	0.80	0.72	0.54	0.35	0.82	0.73	0.56	0.36	0.85	0.76	0.57	0.37	0.88	0.79	0.60	0.38	0.89	0.79	0.60	0.39
		ΔT	20	19	15	11	21	19	16	11	21	19	16	11	21	19	16	11	20	19	15	11	19	18	14	10
		kW	2.34	2.39	2.46	2.54	2.51	2.57	2.65	2.73	2.67	2.72	2.81	2.90	2.80	2.86	2.96	3.05	2.92	2.98	3.08	3.18	3.02	3.08	3.18	3.29
		Amps	8.6	8.8	9.1	9.5	9.3	9.6	9.9	10.3	10.2	10.4	10.8	11.2	10.9	11.2	11.6	12.0	11.6	11.9	12.3	12.8	12.3	12.6	13.1	13.6
		HI PR	237	255	269	281	266	286	302	315	302	325	344	358	344	371	391	408	388	417	440	459	428	461	487	507
1200	LO PR	102	108	118	126	108	114	125	133	112	119	130	138	117	125	136	145	123	131	143	152	127	135	148	158	
	MBh	32.5	33.5	36.2	38.9	31.8	32.7	35.4	38.0	31.0	31.9	34.5	37.1	30.2	31.1	33.7	36.2	28.7	29.6	32.0	34.4	26.6	27.4	29.7	31.8	
	S/T	0.80	0.72	0.54	0.35	0.83	0.74	0.56	0.36	0.85	0.76	0.58	0.37	0.88	0.79	0.60	0.38	0.91	0.82	0.62	0.40	0.92	0.82	0.62	0.40	
	ΔT	20	18	15	10	20	19	15	11	20	19	15	11	20	19	15	11	20	18	15	10	19	17	14	10	
	kW	2.40	2.45	2.52	2.60	2.58	2.63	2.71	2.80	2.73	2.79	2.88	2.97	2.87	2.94	3.03	3.13	2.99	3.06	3.16	3.26	3.09	3.16	3.27	3.37	
	Amps	8.8	9.1	9.4	9.7	9.6	9.8	10.2	10.6	10.5	10.7	11.1	11.5	11.2	11.5	11.9	12.4	12.0	12.3	12.7	13.2	12.7	13.0	13.5	14.0	
1350	HI PR	244	263	278	290	274	295	312	325	312	336	354	370	355	382	404	421	399	430	454	473	441	475	502	523	
	LO PR	105	112	122	130	111	118	129	137	115	123	134	143	121	129	141	150	127	135	147	157	131	140	152	162	
	MBh	33.5	34.5	37.3	40.0	32.7	33.7	36.4	39.1	31.9	32.9	35.6	38.2	31.1	32.1	34.7	37.3	29.6	30.5	33.0	35.4	27.4	28.2	30.5	32.8	
	S/T	0.84	0.75	0.57	0.37	0.87	0.78	0.59	0.38	0.89	0.80	0.60	0.39	0.92	0.82	0.62	0.40	0.96	0.86	0.65	0.42	0.96	0.86	0.65	0.42	
	ΔT	19	18	14	10	19	18	15	10	19	18	15	10	20	18	15	10	19	18	15	10	18	17	14	9	
	kW	2.41	2.46	2.54	2.62	2.60	2.65	2.73	2.82	2.76	2.81	2.90	3.00	2.90	2.96	3.05	3.15	3.02	3.08	3.18	3.29	3.12	3.19	3.29	3.40	
1350	Amps	8.9	9.2	9.5	9.8	9.7	9.9	10.3	10.7	10.6	10.8	11.2	11.6	11.3	11.6	12.0	12.5	12.1	12.4	12.8	13.3	12.8	13.2	13.6	14.1	
	HI PR	247	266	280	292	277	298	315	328	315	339	358	373	359	386	408	425	403	434	459	478	446	480	507	528	
75	LO PR	106	113	123	131	112	119	130	139	116	124	135	144	122	130	142	151	128	136	149	159	133	141	154	164	

IDB: Entering Indoor Dry Bulb Temperature

High and low pressures are measured at the liquid and suction service valves.

Shaded area reflects ACCA (TVA) conditions

Amps = outdoor unit amps (comp.+fan)

kW = Total system power

		OUTDOOR AMBIENT TEMPERATURE																																			
		65°F						75°F						85°F						95°F						105°F						115°F					
		ENTERING INDOOR WET BULB TEMPERATURE																																			
IDB	AIRFLOW	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71								
80	1050	Mbh	30.5	31.2	33.3	35.6	29.8	30.5	32.6	34.8	29.1	29.8	31.8	34.0	28.4	29.0	31.0	33.2	27.0	27.6	29.5	31.5	25.0	25.5	27.3	29.2	25.0	25.5	27.3	29.2							
		S/T	0.85	0.79	0.65	0.5	0.88	0.82	0.67	0.50	0.90	0.84	0.69	0.5	0.93	0.87	0.71	0.53	0.96	0.90	0.74	0.6	0.97	0.91	0.74	0.56	0.97	0.91	0.74	0.56							
		ΔT	23	22	19	15	23	22	19	15	23	22	19	15	23	22	19	15	23	22	19	15	21	20	18	14	21	20	18	14							
		kW	2.36	2.41	2.48	2.6	2.53	2.59	2.67	2.75	2.69	2.75	2.83	2.9	2.83	2.89	2.98	3.08	2.94	3.01	3.10	3.2	3.04	3.11	3.21	3.32	3.04	3.11	3.21	3.32							
		Amps	8.7	8.9	9.2	9.6	9.4	9.7	10.0	10.4	10.3	10.5	10.9	11.3	11.0	11.3	11.7	12.1	11.7	12.0	12.4	12.9	12.5	12.8	13.2	13.7	12.5	12.8	13.2	13.7							
	Hi PR	239	258	272	283.7	269	289	305	318	305	329	347	362.1	348	374	395	412	391	421	445	463.9	432	465	491	513	432	465	491	513								
	LO PR	103	109	120	127.3	109	116	126	134	113	120	131	139.8	119	126	138	147	124	132	144	153.8	129	137	149	159	129	137	149	159								
80	1200	Mbh	33.1	33.8	36.1	38.6	32.3	33.0	35.3	37.7	31.5	32.2	34.4	36.8	30.8	31.4	33.6	35.9	29.2	29.9	31.9	34.1	27.1	27.7	29.6	31.6	27.1	27.7	29.6	31.6							
		S/T	0.88	0.82	0.67	0.5	0.91	0.85	0.70	0.52	0.93	0.88	0.71	0.5	0.96	0.90	0.74	0.55	1.00	0.94	0.76	0.6	1.00	0.95	0.77	0.58	1.00	0.95	0.77	0.58							
		ΔT	22	21	19	15	23	22	19	15	23	22	19	15	23	22	19	15	22	21	19	15	21	20	17	14	21	20	17	14							
		kW	2.42	2.46	2.54	2.6	2.60	2.65	2.73	2.82	2.76	2.81	2.90	3.0	2.90	2.96	3.05	3.15	3.02	3.08	3.18	3.3	3.12	3.19	3.29	3.40	3.12	3.19	3.29	3.40							
		Amps	8.9	9.2	9.5	9.8	9.7	9.9	10.3	10.7	10.6	10.8	11.2	11.6	11.3	11.6	12.0	12.5	12.1	12.4	12.8	13.3	12.8	13.2	13.6	14.1	12.8	13.2	13.6	14.1							
	Hi PR	247	266	280	292.5	277	298	315	328	315	339	358	373.3	359	386	408	425	404	434	459	478.3	446	480	507	528	446	480	507	528								
	LO PR	106	113	123	131.2	112	119	130	139	116	124	135	144.1	122	130	142	151	128	136	149	158.6	133	141	154	164	133	141	154	164								
1350	Mbh	34.1	34.8	37.2	39.8	33.3	34.0	36.3	38.8	32.5	33.2	35.5	37.9	31.7	32.4	34.6	37.0	30.1	30.8	32.9	35.1	27.9	28.5	30.5	32.6	27.9	28.5	30.5	32.6								
		S/T	0.92	0.86	0.70	0.5	0.96	0.90	0.73	0.54	1.00	0.92	0.75	0.6	1.00	0.95	0.77	0.58	1.00	1.00	0.80	0.6	1.00	1.00	0.81	0.60	1.00	1.00	0.81	0.60							
		ΔT	21	20	18	14	22	21	18	14	22	21	18	14	22	21	18	15	21	21	18	14	19	19	17	13	19	19	17	13							
		kW	2.43	2.48	2.56	2.6	2.62	2.67	2.76	2.84	2.78	2.84	2.93	3.0	2.92	2.98	3.08	3.18	3.04	3.11	3.21	3.3	3.15	3.21	3.32	3.43	3.15	3.21	3.32	3.43							
		Amps	9.0	9.2	9.6	9.9	9.8	10.0	10.4	10.8	10.7	10.9	11.3	11.8	11.4	11.7	12.1	12.6	12.2	12.5	12.9	13.4	12.9	13.3	13.7	14.3	12.9	13.3	13.7	14.3							
	Hi PR	249	268	283	295.4	280	301	318	331	318	342	361	377.0	362	390	412	429	408	439	463	483.1	450	485	512	534	450	485	512	534								
	LO PR	107	114	124	132.5	113	120	131	140	118	125	137	145.5	124	131	144	153	130	138	150	160.2	134	143	156	166	134	143	156	166								
85	1050	Mbh	31.1	31.7	33.2	35.4	30.3	30.9	32.4	34.6	29.6	30.2	31.6	33.7	28.9	29.5	30.9	32.9	27.5	28.0	29.3	31.3	25.4	25.9	27.2	29.0	25.4	25.9	27.2	29.0							
		S/T	0.89	0.86	0.77	0.63	0.92	0.89	0.80	0.65	0.94	0.91	0.82	0.67	0.97	0.94	0.85	0.69	1.00	0.98	0.88	0.71	1.00	0.98	0.89	0.72	1.00	0.98	0.89	0.72							
		ΔT	24	24	22	19	24	24	23	20	24	24	23	20	25	24	23	20	24	24	23	20	22	22	21	18	22	22	21	18							
		kW	2.38	2.43	2.50	2.58	2.55	2.61	2.69	2.77	2.71	2.77	2.86	2.95	2.85	2.91	3.00	3.10	2.97	3.03	3.13	3.23	3.07	3.13	3.24	3.34	3.07	3.13	3.24	3.34							
		Amps	8.8	9.0	9.3	9.6	9.5	9.7	10.1	10.5	10.4	10.6	11.0	11.4	11.1	11.4	11.8	12.2	11.8	12.1	12.6	13.1	12.6	12.9	13.3	13.9	12.6	12.9	13.3	13.9							
	Hi PR	242	260	275	287	271	292	308	322	309	332	351	366	351	378	399	416	395	425	449	469	437	470	496	518	437	470	496	518								
	LO PR	104	111	121	129	110	117	128	136	114	121	133	141	120	128	139	148	126	134	146	155	130	138	151	161	130	138	151	161								
1200	Mbh	33.7	34.3	35.9	38.3	32.9	33.5	35.1	37.5	32.1	32.7	34.3	36.6	31.3	31.9	33.4	35.7	29.7	30.3	31.8	33.9	27.6	28.1	29.4	31.4	27.6	28.1	29.4	31.4								
	S/T	0.92	0.89	0.80	0.65	0.95	0.92	0.83	0.67	0.98	0.94	0.85	0.69	1.00	0.98	0.88	0.71	1.00	1.00	0.91	0.74	1.00	1.00	0.92	0.75	1.00	1.00	0.92	0.75								
	ΔT	24	23	22	19	24	24	22	19	24	24	22	19	24	24	23	20	23	23	22	19	21	22	21	18	21	22	21	18								
	kW	2.43	2.48	2.56	2.64	2.62	2.67	2.76	2.84	2.78	2.84	2.93	3.02	2.92	2.98	3.08	3.18	3.04	3.11	3.21	3.32	3.15	3.21	3.32	3.43	3.15	3.21	3.32	3.43								
	Amps	9.0	9.2	9.6	9.9	9.8	10.0	10.4	10.8	10.7	10.9	11.3	11.8	11.4	11.7	12.1	12.6	12.2	12.5	12.9	13.4	12.9	13.3	13.7	14.3	12.9	13.3	13.7	14.3								
Hi PR	249	268	283	295	280	301	318	331	318	342	361	377	362	390	412	429	408	439	463	483	450	485	512	534	450	485	512	534									
LO PR	107	114	124	133	113	120	131	140	118	125	137	146	124	131	144	153	130	138	150	160	134	143	156	166	134	143	156	166									
1350	Mbh	34.7	35.3	37.0	39.5	33.9	34.5	36.2	38.6	33.1	33.7	35.3	37.7	32.3	32.9	34.4	36.7	30.6	31.2	32.7	34.9	28.4	28.9	30.3	32.3	28.4	28.9	30.3	32.3								
	S/T	0.97	0.93	0.84	0.68	1.00	0.97	0.87	0.71	1.00	0.99	0.89	0.73	1.00	1.00	0.92	0.75	1.00	1.00	0.96	0.78	1.00	1.00	0.97	0.78	1.00	1.00	0.97	0.78								
	ΔT	23	22	21	18	23	23	21	19	23	23	21	19	22	22	22	19	21	21	21	18	19	20	20	17	19	20	20	17								
	kW	2.45	2.50	2.58	2.66	2.64	2.69	2.78	2.87	2.80	2.86	2.95	3.05	2.94	3.01	3.10	3.21	3.07	3.13	3.24	3.34	3.17	3.24	3.35	3.46	3.17	3.24	3.35	3.46								
	Amps	9.1	9.3	9.7	10.0	9.9	10.1	10.5	10.9	10.8	11.0	11.4	11.9	11.5	11.8	12.2	12.7	12.3	12.6	13.1	13.6	13.1	13.4	13.9	14.4	13.1	13.4	13.9	14.4								
Hi PR	252	271	286	298	282	304	321	335	321	346	365	381	366	394	416	434	412	443	468	488	455	489	517	539	455	489	517	539									
LO PR	108	115	126	134	114	122	133	141	119	126	138	147	125	133	145	154	131	139	152	162	135	144	157	167	135	144	157	167									
		Shaded area reflects AHRI conditions																								Amps = outdoor unit amps (comp.+fan) kW = Total system power											
		DB: Entering Indoor Dry Bulb Temperature																																			
		High and low pressures are measured at the liquid and suction service valves.																																			

IDB		AIRFLOW		OUTDOOR AMBIENT TEMPERATURE																																			
				65°F						75°F						85°F						95°F						105°F						115°F					
				ENTERING INDOOR WET BULB TEMPERATURE																																			
70	1225	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71										
		MBh	35.1	36.4	39.9	-	34.3	35.6	39.0	-	33.5	34.7	38.0	-	32.7	33.9	37.1	-	31.0	32.2	35.2	-	28.8	29.8	32.7	-	28.8	29.8	32.7	-									
		S/T	0.72	0.60	0.42	-	0.75	0.63	0.43	-	0.77	0.64	0.45	-	0.79	0.66	0.46	-	0.82	0.69	0.48	-	0.83	0.69	0.48	-	0.83	0.69	0.48	-									
		ΔT	19	17	13	-	19	17	13	-	19	17	13	-	19	17	13	-	19	17	13	-	18	16	12	-	18	16	12	-									
		kW	2.81	2.86	2.94	-	3.00	3.06	3.15	-	3.17	3.24	3.33	-	3.33	3.39	3.50	-	3.45	3.53	3.63	-	3.57	3.64	3.75	-	3.57	3.64	3.75	-									
		Amps	10.3	10.6	10.9	-	11.1	11.4	11.8	-	12.1	12.4	12.8	-	12.9	13.2	13.7	-	13.7	14.1	14.5	-	14.5	14.9	15.4	-	14.5	14.9	15.4	-									
		HI PR	220	237	250	-	247	266	281	-	281	302	319	-	320	344	363	-	360	387	409	-	398	428	452	-	398	428	452	-									
LO PR	101	107	117	-	107	113	124	-	111	118	129	-	116	124	135	-	122	130	142	-	126	134	147	-	126	134	147	-											
70	1400	MBh	38.1	39.4	43.2	-	37.2	38.5	42.2	-	36.3	37.6	41.2	-	35.4	36.7	40.2	-	33.6	34.9	38.2	-	31.2	32.3	35.4	-	31.2	32.3	35.4	-									
		S/T	0.75	0.63	0.43	-	0.78	0.65	0.45	-	0.80	0.67	0.46	-	0.82	0.69	0.48	-	0.86	0.71	0.49	-	0.86	0.72	0.50	-	0.86	0.72	0.50	-									
		ΔT	19	16	12	-	19	16	12	-	19	16	12	-	19	17	13	-	19	16	12	-	18	15	12	-	18	15	12	-									
		kW	2.87	2.92	3.01	-	3.07	3.13	3.22	-	3.25	3.31	3.41	-	3.40	3.47	3.58	-	3.54	3.61	3.72	-	3.65	3.73	3.84	-	3.65	3.73	3.84	-									
		Amps	10.6	10.9	11.2	-	11.5	11.7	12.1	-	12.4	12.7	13.1	-	13.3	13.6	14.0	-	14.1	14.5	14.9	-	15.0	15.3	15.8	-	15.0	15.3	15.8	-									
		HI PR	227	244	258	-	255	274	289	-	289	312	329	-	330	355	375	-	371	399	421	-	410	441	466	-	410	441	466	-									
		LO PR	104	111	121	-	110	117	128	-	114	122	133	-	120	128	139	-	126	134	146	-	130	138	151	-	130	138	151	-									
1575	MBh	39.2	40.6	44.5	-	38.3	39.7	43.5	-	37.4	38.7	42.4	-	36.5	37.8	41.4	-	34.6	35.9	39.3	-	32.1	33.3	36.4	-	32.1	33.3	36.4	-										
	S/T	0.79	0.66	0.46	-	0.82	0.68	0.47	-	0.84	0.70	0.48	-	0.86	0.72	0.50	-	0.90	0.75	0.52	-	0.90	0.76	0.52	-	0.90	0.76	0.52	-										
	ΔT	18	16	12	-	18	16	12	-	18	16	12	-	18	16	12	-	18	16	12	-	17	15	11	-	17	15	11	-										
	kW	2.89	2.94	3.03	-	3.09	3.15	3.25	-	3.27	3.34	3.44	-	3.43	3.50	3.61	-	3.56	3.64	3.75	-	3.68	3.76	3.87	-	3.68	3.76	3.87	-										
	Amps	10.7	11.0	11.3	-	11.6	11.8	12.2	-	12.5	12.8	13.3	-	13.4	13.7	14.2	-	14.2	14.6	15.1	-	15.1	15.5	16.0	-	15.1	15.5	16.0	-										
	HI PR	229	247	260	-	257	277	292	-	292	315	332	-	333	358	378	-	375	403	426	-	414	445	470	-	414	445	470	-										
	LO PR	105	112	122	-	111	118	129	-	115	123	134	-	121	129	141	-	127	135	148	-	131	140	153	-	131	140	153	-										

75	AIRFLOW	35.1	36.4	39.9	-	34.3	35.6	39.0	-	33.5	34.7	38.0	-	32.7	33.9	37.1	-	31.0	32.2	35.2	-	28.8	29.8	32.7	-	28.8	29.8	32.7	-	28.8	29.8	32.7	-
	MBh	0.72	0.60	0.42	-	0.75	0.63	0.43	-	0.77	0.64	0.45	-	0.79	0.66	0.46	-	0.82	0.69	0.48	-	0.83	0.69	0.48	-	0.83	0.69	0.48	-	0.83	0.69	0.48	-
	ΔT	19	17	13	-	19	17	13	-	19	17	13	-	19	17	13	-	19	17	13	-	18	16	12	-	18	16	12	-	18	16	12	-
	1225	2.81	2.86	2.94	-	3.00	3.06	3.15	-	3.17	3.24	3.33	-	3.33	3.39	3.50	-	3.45	3.53	3.63	-	3.57	3.64	3.75	-	3.57	3.64	3.75	-	3.57	3.64	3.75	-
	Amps	10.3	10.6	10.9	-	11.1	11.4	11.8	-	12.1	12.4	12.8	-	12.9	13.2	13.7	-	13.7	14.1	14.5	-	14.5	14.9	15.4	-	14.5	14.9	15.4	-	14.5	14.9	15.4	-
	HI PR	227	237	250	-	247	266	281	-	281	302	319	-	320	344	363	-	360	387	409	-	398	428	452	-	398	428	452	-	398	428	452	-
	LO PR	101	107	117	-	107	113	124	-	111	118	129	-	116	124	135	-	122	130	142	-	126	134	147	-	126	134	147	-	126	134	147	-
	1400	38.1	39.4	43.2	-	37.2	38.5	42.2	-	36.3	37.6	41.2	-	35.4	36.7	40.2	-	33.6	34.9	38.2	-	31.2	32.3	35.4	-	31.2	32.3	35.4	-	31.2	32.3	35.4	-
	ΔT	19	16	12	-	19	16	12	-	19	16	12	-	19	16	12	-	19	16	12	-	18	15	12	-	18	15	12	-	18	15	12	-
	1575	2.87	2.92	3.01	-	3.07	3.13	3.22	-	3.25	3.31	3.41	-	3.40	3.47	3.58	-	3.54	3.61	3.72	-	3.65	3.73	3.84	-	3.65	3.73	3.84	-	3.65	3.73	3.84	-

IDB: Entering Indoor Dry Bulb Temperature
 High and low pressures are measured at the liquid and suction service valves.

Shaded area reflects ACCA (TVA) conditions

Amps = outdoor unit amps (comp.+fan)

kW = Total system power

		OUTDOOR AMBIENT TEMPERATURE																							
		65°F				75°F				85°F				95°F				105°F				115°F			
IDB	AIRFLOW	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71
80	MBh	36.4	37.1	39.7	42.4	35.5	36.3	38.8	41.4	34.7	35.4	37.8	40.5	33.8	34.6	36.9	39.5	32.1	32.8	35.1	37.5	29.8	30.4	32.5	34.7
	S/T	0.90	0.85	0.69	0.5	0.94	0.88	0.71	0.53	0.96	0.90	0.73	0.5	0.99	0.93	0.76	0.57	1.03	0.96	0.78	0.6	1.04	0.97	0.79	0.59
	ΔT	25	24	21	16	25	24	21	17	25	24	21	17	25	24	21	17	25	24	21	17	23	22	19	15
	kW	2.85	2.90	2.98	3.1	3.05	3.11	3.20	3.29	3.22	3.29	3.39	3.5	3.38	3.45	3.55	3.66	3.51	3.58	3.69	3.8	3.62	3.70	3.81	3.93
	Amps	10.5	10.8	11.1	11.5	11.4	11.6	12.0	12.4	12.3	12.6	13.0	13.5	13.2	13.5	13.9	14.4	14.0	14.3	14.8	15.4	14.8	15.2	15.7	16.3
	HI PR	225	242	255	266.1	252	271	286	299	287	308	326	339.6	326	351	371	387	367	395	417	435.1	406	437	461	481
	LO PR	103	110	120	127.4	109	116	126	135	113	120	131	139.8	119	126	138	147	124	132	145	154.0	129	137	150	159
1400	MBh	39.4	40.2	43.0	46.0	38.5	39.3	42.0	44.9	37.6	38.4	41.0	43.8	36.6	37.4	40.0	42.8	34.8	35.6	38.0	40.6	32.2	32.9	35.2	37.6
	S/T	0.94	0.88	0.71	0.5	0.97	0.91	0.74	0.55	1.00	0.93	0.76	0.6	1.00	0.96	0.78	0.59	1.00	1.00	0.81	0.6	1.00	1.00	0.82	0.61
	ΔT	24	23	20	16	25	23	20	16	25	24	20	16	24	24	21	16	23	23	20	16	21	22	19	15
	kW	2.91	2.97	3.05	3.1	3.12	3.18	3.27	3.37	3.30	3.36	3.47	3.6	3.46	3.53	3.64	3.75	3.59	3.67	3.78	3.9	3.71	3.79	3.91	4.03
	Amps	10.8	11.1	11.4	11.8	11.7	11.9	12.3	12.8	12.7	13.0	13.4	13.9	13.5	13.9	14.3	14.8	14.4	14.7	15.2	15.8	15.2	15.6	16.1	16.7
	HI PR	231	249	263	274.3	260	279	295	308	295	318	336	350.1	336	362	382	399	378	407	430	448.6	418	450	475	496
	LO PR	106	113	123	131.3	112	119	130	139	117	124	135	144.2	122	130	142	151	128	137	149	158.7	133	141	154	164
1575	MBh	40.6	41.5	44.3	47.3	39.6	40.5	43.3	46.2	38.7	39.5	42.2	45.1	37.7	38.6	41.2	44.0	35.9	36.6	39.1	41.8	33.2	33.9	36.3	38.8
	S/T	1.00	0.92	0.75	0.6	1.00	0.95	0.78	0.58	1.00	1.00	0.80	0.6	1.00	1.00	0.82	0.61	1.00	1.00	0.85	0.6	1.00	1.00	0.86	0.64
	ΔT	24	22	19	15	23	23	20	16	23	23	20	16	22	23	20	16	21	21	19	16	19	20	18	15
	kW	2.93	2.99	3.08	3.2	3.14	3.20	3.30	3.40	3.32	3.39	3.49	3.6	3.48	3.56	3.66	3.78	3.62	3.70	3.81	3.9	3.74	3.82	3.94	4.06
	Amps	10.9	11.2	11.5	11.9	11.8	12.0	12.4	12.9	12.8	13.1	13.5	14.0	13.6	14.0	14.4	15.0	14.5	14.9	15.4	15.9	15.4	15.7	16.3	16.9
	HI PR	234	252	266	277.1	262	282	298	311	298	321	339	353.6	340	366	386	403	382	411	434	453.1	422	455	480	501
	LO PR	107	114	125	132.6	113	121	132	140	118	125	137	145.6	124	132	144	153	130	138	151	160.3	134	143	156	166

85	MBh	37.0	37.7	39.5	42.1	36.1	36.8	38.6	41.2	35.3	36.0	37.7	40.2	34.4	35.1	36.7	39.2	32.7	33.3	34.9	37.2	30.3	30.9	32.3	34.5
	S/T	0.95	0.91	0.82	0.67	0.98	0.95	0.85	0.69	1.00	0.97	0.88	0.71	1.00	1.00	0.90	0.73	1.00	1.00	0.94	0.76	1.00	1.00	0.95	0.77
	ΔT	26	26	24	21	27	26	25	21	26	26	25	21	26	26	25	22	25	25	25	21	23	23	23	20
	kW	2.87	2.92	3.01	3.10	3.07	3.13	3.22	3.32	3.25	3.31	3.41	3.52	3.40	3.47	3.58	3.69	3.54	3.61	3.72	3.84	3.65	3.73	3.84	3.97
	Amps	10.6	10.9	11.2	11.6	11.5	11.7	12.1	12.6	12.4	12.7	13.1	13.6	13.3	13.6	14.0	14.6	14.1	14.5	14.9	15.5	14.9	15.3	15.8	16.4
	HI PR	227	244	258	269	254	274	289	302	289	311	329	343	330	355	375	391	371	399	421	439	410	441	466	486
1400	LO PR	104	111	121	129	110	117	128	136	114	121	133	141	120	128	139	148	126	134	146	155	130	138	151	161
	MBh	40.1	40.9	42.8	45.6	39.1	39.9	41.8	44.6	38.2	39.0	40.8	43.5	37.3	38.0	39.8	42.5	35.4	36.1	37.8	40.3	32.8	33.4	35.0	37.4
	S/T	0.98	0.95	0.85	0.69	1.00	0.98	0.89	0.72	1.00	1.00	0.91	0.74	1.00	1.00	0.94	0.76	1.00	1.00	0.97	0.79	1.00	1.00	0.98	0.80
	ΔT	26	25	24	21	26	26	24	21	25	26	24	21	24	25	25	21	23	24	24	21	22	22	23	20
	kW	2.93	2.99	3.08	3.17	3.14	3.20	3.30	3.40	3.32	3.39	3.49	3.60	3.48	3.56	3.66	3.78	3.62	3.70	3.81	3.93	3.74	3.82	3.94	4.06
	Amps	10.9	11.2	11.5	11.9	11.8	12.0	12.4	12.9	12.8	13.1	13.5	14.0	13.6	14.0	14.4	15.0	14.5	14.9	15.4	15.9	15.4	15.7	16.3	16.9
1575	HI PR	234	252	266	277	262	282	298	311	298	321	339	354	340	366	386	403	382	411	434	453	422	455	480	501
	LO PR	107	114	125	133	113	121	132	140	118	125	137	146	124	132	144	153	130	138	151	160	134	143	156	166
	MBh	41.3	42.1	44.1	47.0	40.3	41.1	43.0	45.9	39.4	40.1	42.0	44.8	38.4	39.1	41.0	43.7	36.5	37.2	38.9	41.5	33.8	34.4	36.1	38.5
	S/T	1.00	0.99	0.90	0.73	1.00	1.00	0.93	0.75	1.00	1.00	0.95	0.77	1.00	1.00	0.98	0.80	1.00	1.00	1.00	0.83	1.00	1.00	1.00	0.83
	ΔT	24	24	23	20	24	24	23	20	23	23	23	20	22	23	24	20	21	22	23	20	20	20	21	19
	kW	2.95	3.01	3.10	3.19	3.16	3.23	3.32	3.42	3.35	3.42	3.52	3.63	3.51	3.58	3.69	3.81	3.65	3.73	3.84	3.96	3.77	3.85	3.97	4.10
1575	Amps	11.0	11.3	11.6	12.0	11.9	12.2	12.6	13.0	12.9	13.2	13.6	14.1	13.8	14.1	14.6	15.1	14.6	15.0	15.5	16.1	15.5	15.9	16.4	17.1
	HI PR	236	254	268	280	265	285	301	314	301	324	342	357	343	369	390	407	386	415	439	458	427	459	484	506
	LO PR	108	115	126	134	114	122	133	142	119	126	138	147	125	133	145	154	131	139	152	162	135	144	157	167

IDB: Entering Indoor Dry Bulb Temperature

High and low pressures are measured at the liquid and suction service valves.

Shaded area reflects AHRI conditions

Amps = outdoor unit amps (comp.+fan)

kW = Total system power

		OUTDOOR AMBIENT TEMPERATURE																								
		65°F				75°F				85°F				95°F				105°F				115°F				
IDB	AIRFLOW	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	
70	1400	MBh	40.4	41.9	45.9	-	39.5	40.9	44.8	-	38.5	39.9	43.7	-	37.6	38.9	42.7	-	35.7	37.0	40.5	-	33.1	34.3	37.5	-
		S/T	0.71	0.59	0.41	-	0.73	0.61	0.42	-	0.75	0.63	0.43	-	0.78	0.65	0.45	-	0.80	0.67	0.47	-	0.81	0.68	0.47	-
		ΔT	19	16	12	-	19	16	12	-	19	16	12	-	19	17	13	-	19	16	12	-	18	15	12	-
		kW	3.22	3.28	3.37	-	3.44	3.51	3.62	-	3.64	3.72	3.83	-	3.82	3.90	4.02	-	3.97	4.05	4.18	-	4.10	4.19	4.32	-
		Amps	11.8	12.1	12.5	-	12.8	13.1	13.5	-	13.9	14.2	14.7	-	14.8	15.2	15.7	-	15.8	16.2	16.7	-	16.7	17.1	17.7	-
		HI PR	241	259	274	-	270	291	307	-	307	331	349	-	350	377	398	-	394	424	448	-	435	468	494	-
		LO PR	104	110	120	-	110	117	127	-	114	121	132	-	120	127	139	-	125	133	146	-	130	138	151	-
70	1600	MBh	43.8	45.4	49.7	-	42.7	44.3	48.5	-	41.7	43.2	47.4	-	40.7	42.2	46.2	-	38.7	40.1	43.9	-	35.8	37.1	40.7	-
		S/T	0.73	0.61	0.42	-	0.76	0.63	0.44	-	0.78	0.65	0.45	-	0.80	0.67	0.47	-	0.83	0.70	0.48	-	0.84	0.70	0.49	-
		ΔT	18	16	12	-	19	16	12	-	19	16	12	-	19	16	12	-	19	16	12	-	17	15	11	-
		kW	3.29	3.35	3.45	-	3.52	3.59	3.70	-	3.73	3.80	3.92	-	3.91	3.99	4.12	-	4.07	4.15	4.28	-	4.20	4.29	4.42	-
		Amps	12.2	12.5	12.9	-	13.1	13.5	13.9	-	14.3	14.6	15.1	-	15.3	15.6	16.2	-	16.2	16.6	17.2	-	17.2	17.6	18.2	-
		HI PR	248	267	282	-	279	300	317	-	317	341	360	-	361	388	410	-	406	437	461	-	449	483	510	-
		LO PR	107	114	124	-	113	120	131	-	117	125	136	-	123	131	143	-	129	137	150	-	134	142	155	-
1800	1800	MBh	45.1	46.7	51.2	-	44.0	45.6	50.0	-	43.0	44.5	48.8	-	41.9	43.5	47.6	-	39.8	41.3	45.2	-	36.9	38.2	41.9	-
		S/T	0.77	0.64	0.44	-	0.80	0.67	0.46	-	0.82	0.68	0.47	-	0.84	0.70	0.49	-	0.87	0.73	0.51	-	0.88	0.74	0.51	-
		ΔT	18	15	12	-	18	16	12	-	18	16	12	-	18	16	12	-	18	15	12	-	17	14	11	-
		kW	3.31	3.38	3.48	-	3.55	3.62	3.73	-	3.76	3.83	3.95	-	3.94	4.02	4.15	-	4.10	4.18	4.32	-	4.23	4.32	4.46	-
		Amps	12.3	12.6	13.0	-	13.3	13.6	14.0	-	14.4	14.8	15.3	-	15.4	15.8	16.3	-	16.4	16.8	17.4	-	17.4	17.8	18.4	-
		HI PR	251	270	285	-	281	303	320	-	320	344	364	-	365	392	414	-	410	441	466	-	453	488	515	-
		LO PR	108	115	125	-	114	121	132	-	119	126	138	-	125	132	145	-	130	139	152	-	135	144	157	-

75	1400	MBh	41.1	42.3	45.8	49.1	40.1	41.3	44.7	48.0	39.2	40.3	43.7	46.8	38.2	39.3	42.6	45.7	36.3	37.4	40.5	43.4	33.6	34.6	37.5	40.2
		S/T	0.80	0.72	0.54	0.35	0.83	0.74	0.56	0.36	0.85	0.76	0.58	0.37	0.88	0.79	0.60	0.38	0.91	0.82	0.62	0.40	0.92	0.82	0.62	0.40
		ΔT	22	20	16	11	22	20	17	11	22	20	17	11	22	20	17	12	22	20	16	11	20	19	15	11
		kW	3.24	3.30	3.40	3.50	3.47	3.54	3.64	3.75	3.67	3.75	3.86	3.98	3.85	3.93	4.05	4.18	4.00	4.09	4.21	4.35	4.13	4.22	4.35	4.49
		Amps	11.9	12.2	12.6	13.1	12.9	13.2	13.7	14.2	14.0	14.4	14.8	15.4	15.0	15.4	15.9	16.5	15.9	16.3	16.9	17.5	16.9	17.3	17.9	18.6
		HI PR	243	262	276	288	273	294	310	324	311	334	353	368	354	381	402	419	398	428	452	472	440	473	500	521
		LO PR	105	111	122	130	111	118	129	137	115	122	134	142	121	129	140	149	127	135	147	157	131	139	152	162
	1600	MBh	44.5	45.8	49.6	53.2	43.5	44.8	48.4	52.0	42.4	43.7	47.3	50.8	41.4	42.6	46.1	49.5	39.3	40.5	43.8	47.0	36.4	37.5	40.6	43.6
		S/T	0.83	0.75	0.56	0.36	0.86	0.77	0.58	0.38	0.89	0.79	0.60	0.39	0.91	0.82	0.62	0.40	0.95	0.85	0.64	0.41	0.96	0.86	0.65	0.42
		ΔT	21	20	16	11	22	20	16	11	22	20	16	11	22	20	16	11	21	20	16	11	20	18	15	10
1800		kW	3.31	3.38	3.48	3.58	3.55	3.62	3.73	3.84	3.76	3.83	3.95	4.08	3.94	4.02	4.15	4.28	4.10	4.18	4.32	4.45	4.23	4.32	4.46	4.60
		Amps	12.3	12.6	13.0	13.5	13.3	13.6	14.0	14.6	14.4	14.8	15.3	15.8	15.4	15.8	16.3	16.9	16.4	16.8	17.4	18.0	17.4	17.8	18.4	19.1
		HI PR	251	270	285	297	281	303	320	334	320	344	364	379	365	392	414	432	410	441	466	486	453	488	515	537
		LO PR	108	115	125	134	114	121	132	141	119	126	138	147	125	132	145	154	131	139	152	161	135	144	157	167
	1800	MBh	45.8	47.2	51.1	54.8	44.8	46.1	49.9	53.6	43.7	45.0	48.7	52.3	42.6	43.9	47.5	51.0	40.5	41.7	45.1	48.5	37.5	38.6	41.8	44.9
		S/T	0.87	0.78	0.59	0.38	0.91	0.81	0.61	0.39	0.93	0.83	0.63	0.40	0.96	0.86	0.65	0.42	0.99	0.89	0.67	0.43	1.00	0.90	0.68	0.44
		ΔT	20	19	15	11	21	19	16	11	21	19	16	11	21	19	16	11	21	19	16	11	19	18	14	10
		kW	3.34	3.40	3.50	3.61	3.58	3.65	3.76	3.87	3.79	3.86	3.98	4.11	3.97	4.06	4.18	4.31	4.13	4.22	4.35	4.49	4.27	4.36	4.50	4.64
		Amps	12.4	12.7	13.1	13.6	13.4	13.7	14.2	14.7	14.5	14.9	15.4	16.0	15.6	15.9	16.5	17.1	16.6	17.0	17.5	18.2	17.5	18.0	18.6	19.3
		HI PR	253	273	288	300	284	306	323	337	323	348	367	383	368	396	418	436	414	446	471	491	458	493	520	543
		LO PR	109	116	127	135	115	123	134	143	120	127	139	148	126	134	146	156	132	140	153	163	136	145	158	169

IDB: Entering Indoor Dry Bulb Temperature

High and low pressures are measured at the liquid and suction service valves.

Shaded area reflects ACCA (TVA) conditions

Amps = outdoor unit amps (comp.+fan)

kW = Total system power

IDB		AIRFLOW		OUTDOOR AMBIENT TEMPERATURE																																			
				65°F						75°F						85°F						95°F						105°F						115°F					
				ENTERING INDOOR WET BULB TEMPERATURE																																			
59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71												
80	MBh	41.8	42.7	45.6	48.8	40.8	41.7	44.6	47.7	39.9	40.7	43.5	46.5	38.9	39.7	42.5	45.4	36.9	37.8	40.3	43.1	34.2	35.0	37.4	39.9														
	S/T	0.88	0.83	0.67	0.5	0.91	0.86	0.70	0.52	0.94	0.88	0.71	0.5	0.97	0.91	0.74	0.55	1.00	0.94	0.77	0.6	1.01	0.95	0.77	0.58														
	ΔT	24	23	20	16	24	23	20	16	25	23	20	16	25	24	21	16	24	23	20	16	23	22	19	15														
	kW	3.26	3.33	3.42	3.5	3.49	3.56	3.67	3.78	3.70	3.77	3.89	4.0	3.88	3.96	4.08	4.21	4.03	4.12	4.25	4.4	4.17	4.25	4.39	4.53														
	Amps	12.1	12.3	12.7	13.2	13.0	13.3	13.8	14.3	14.2	14.5	15.0	15.5	15.1	15.5	16.0	16.6	16.1	16.5	17.0	17.7	17.1	17.5	18.1	18.8														
	HI PR	246	264	279	291.3	276	297	313	327	314	338	356	371.7	357	384	406	423	402	432	457	476.3	444	478	505	526														
	LO PR	106	113	123	130.9	112	119	130	138	116	124	135	143.7	122	130	142	151	128	136	149	158.2	132	141	154	164														
	MBh	45.3	46.3	49.5	52.9	44.2	45.2	48.3	51.6	43.2	44.1	47.2	50.4	42.1	43.1	46.0	49.2	40.0	40.9	43.7	46.7	37.1	37.9	40.5	43.3														
1600	S/T	0.91	0.86	0.70	0.5	0.95	0.89	0.72	0.54	0.97	0.91	0.74	0.6	1.00	0.94	0.77	0.57	1.00	0.98	0.79	0.6	1.00	0.98	0.80	0.60														
	ΔT	24	23	20	16	24	23	20	16	24	23	20	16	24	23	20	16	23	23	20	16	21	21	19	15														
	kW	3.34	3.40	3.50	3.6	3.58	3.65	3.76	3.87	3.79	3.86	3.98	4.1	3.97	4.06	4.18	4.31	4.13	4.22	4.35	4.5	4.27	4.36	4.50	4.64														
	Amps	12.4	12.7	13.1	13.6	13.4	13.7	14.2	14.7	14.6	14.9	15.4	16.0	15.6	15.9	16.5	17.1	16.6	17.0	17.5	18.2	17.5	18.0	18.6	19.3														
	HI PR	253	273	288	300.3	284	306	323	337	323	348	367	383.2	368	396	419	436	414	446	471	491.1	458	493	520	543														
	LO PR	109	116	127	134.9	115	123	134	143	120	127	139	148.1	126	134	146	156	132	140	153	163.1	136	145	158	169														
	MBh	46.7	47.7	50.9	54.4	45.6	46.6	49.7	53.2	44.5	45.5	48.6	51.9	43.4	44.3	47.4	50.6	41.2	42.1	45.0	48.1	38.2	39.0	41.7	44.6														
	S/T	0.96	0.90	0.73	0.5	1.00	0.93	0.76	0.57	1.00	0.95	0.78	0.6	1.00	1.00	0.80	0.60	1.00	1.00	0.83	0.6	1.00	1.00	0.84	0.63														
1800	ΔT	23	22	19	15	23	22	19	15	23	22	19	15	22	23	19	16	21	22	19	15	20	20	18	14														
	kW	3.36	3.43	3.53	3.6	3.60	3.68	3.79	3.90	3.82	3.89	4.01	4.1	4.00	4.09	4.21	4.35	4.16	4.25	4.39	4.5	4.30	4.39	4.53	4.68														
	Amps	12.5	12.8	13.2	13.7	13.5	13.8	14.3	14.8	14.7	15.0	15.5	16.1	15.7	16.1	16.6	17.2	16.7	17.1	17.7	18.4	17.7	18.1	18.8	19.5														
	HI PR	256	275	291	303.3	287	309	326	340	327	351	371	387.1	372	400	423	441	418	450	476	496.0	462	498	525	548														
	LO PR	110	117	128	136.3	116	124	135	144	121	129	140	149.6	127	135	148	157	133	142	155	164.7	138	147	160	170														

85	AIRFLOW	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71
	MBh	42.5	43.4	45.4	48.5	41.5	42.4	44.4	47.3	40.6	41.3	43.3	46.2	39.6	40.3	42.2	45.1	37.6	38.3	40.1	42.8	34.8	35.5	37.2	39.7
	S/T	0.92	0.89	0.80	0.65	0.96	0.92	0.83	0.68	0.98	0.95	0.85	0.69	1.00	0.98	0.88	0.72	1.00	1.00	0.92	0.74	1.00	1.00	0.92	0.75
	ΔT	26	25	24	21	26	26	24	21	26	26	24	21	26	26	24	21	25	25	24	21	23	23	23	20
	kW	3.29	3.35	3.45	3.55	3.52	3.59	3.70	3.81	3.73	3.80	3.92	4.04	3.91	3.99	4.11	4.24	4.07	4.15	4.28	4.42	4.20	4.29	4.42	4.56
	Amps	12.2	12.5	12.9	13.3	13.1	13.5	13.9	14.4	14.3	14.6	15.1	15.7	15.3	15.6	16.2	16.8	16.2	16.6	17.2	17.9	17.2	17.6	18.2	18.9
	HI PR	248	267	282	294	279	300	317	330	317	341	360	375	361	388	410	428	406	437	461	481	448	483	510	532
	LO PR	107	114	124	132	113	120	131	140	117	125	136	145	123	131	143	152	129	137	150	160	134	142	155	165
	MBh	46.1	47.0	49.2	52.5	45.0	45.9	48.1	51.3	43.9	44.8	46.9	50.1	42.9	43.7	45.8	48.8	40.7	41.5	43.5	46.4	37.7	38.5	40.3	43.0
	S/T	0.96	0.92	0.83	0.68	0.99	0.96	0.86	0.70	1.00	0.98	0.89	0.72	1.00	1.00	0.91	0.74	1.00	1.00	0.95	0.77	1.00	1.00	0.96	0.78

IDB: Entering Indoor Dry Bulb Temperature
High and low pressures are measured at the liquid and suction service valves.

Shaded area reflects AHRI conditions

Amps = outdoor unit amps (comp.+fan)

kW = Total system power

		OUTDOOR AMBIENT TEMPERATURE																							
		65°F				75°F				85°F				95°F				105°F				115°F			
IDB	AIRFLOW	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71
70	MBh	54.2	56.2	61.6	-	53.0	54.9	60.1	-	51.7	53.6	58.7	-	50.4	52.3	57.3	-	47.9	49.7	54.4	-	44.4	46.0	50.4	-
	S/T	0.69	0.58	0.40	-	0.72	0.60	0.42	-	0.74	0.62	0.43	-	0.76	0.64	0.44	-	0.79	0.66	0.46	-	0.80	0.66	0.46	-
	ΔT	20	17	13	-	20	17	13	-	20	17	13	-	20	17	13	-	20	17	13	-	19	16	12	-
	kW	4.03	4.11	4.24	-	4.33	4.42	4.56	-	4.60	4.70	4.85	-	4.83	4.94	5.10	-	5.03	5.14	5.31	-	5.21	5.32	5.49	-
	Amps	15.2	15.6	16.1	-	16.5	16.9	17.5	-	18.0	18.4	19.0	-	19.2	19.7	20.4	-	20.5	21.0	21.7	-	21.7	22.3	23.0	-
	Hi PR	259	279	294	-	291	313	330	-	331	356	376	-	376	405	428	-	423	456	481	-	468	504	532	-
	Lo PR	105	112	122	-	111	118	129	-	116	123	134	-	122	129	141	-	127	135	148	-	132	140	153	-
70	MBh	54.2	56.2	61.6	-	53.0	54.9	60.1	-	51.7	53.6	58.7	-	50.4	52.3	57.3	-	47.9	49.7	54.4	-	44.4	46.0	50.4	-
	S/T	0.69	0.58	0.40	-	0.72	0.60	0.42	-	0.74	0.62	0.43	-	0.76	0.64	0.44	-	0.79	0.66	0.46	-	0.80	0.66	0.46	-
	ΔT	20	17	13	-	20	17	13	-	20	17	13	-	20	17	13	-	20	17	13	-	19	16	12	-
	kW	4.03	4.11	4.24	-	4.33	4.42	4.56	-	4.60	4.70	4.85	-	4.83	4.94	5.10	-	5.03	5.14	5.31	-	5.21	5.32	5.49	-
	Amps	15.2	15.6	16.1	-	16.5	16.9	17.5	-	18.0	18.4	19.0	-	19.2	19.7	20.4	-	20.5	21.0	21.7	-	21.7	22.3	23.0	-
	Hi PR	259	279	294	-	291	313	330	-	331	356	376	-	376	405	428	-	423	456	481	-	468	504	532	-
	Lo PR	105	112	122	-	111	118	129	-	116	123	134	-	122	129	141	-	127	135	148	-	132	140	153	-
2250	MBh	56.1	58.2	63.7	-	54.8	56.8	62.3	-	53.5	55.5	60.8	-	52.2	54.1	59.3	-	49.6	51.4	56.3	-	45.9	47.6	52.2	-
	S/T	0.74	0.62	0.43	-	0.76	0.64	0.44	-	0.78	0.65	0.45	-	0.81	0.68	0.47	-	0.84	0.70	0.49	-	0.85	0.71	0.49	-
	ΔT	17	15	11	-	17	15	11	-	17	15	11	-	17	15	11	-	17	15	11	-	16	14	10	-
	kW	4.09	4.18	4.31	-	4.40	4.49	4.63	-	4.67	4.77	4.92	-	4.91	5.02	5.18	-	5.12	5.23	5.40	-	5.29	5.41	5.58	-
	Amps	15.5	15.9	16.4	-	16.8	17.2	17.8	-	18.3	18.8	19.4	-	19.6	20.1	20.8	-	20.9	21.4	22.1	-	22.1	22.7	23.5	-
	Hi PR	264	284	300	-	296	319	337	-	337	363	383	-	384	413	436	-	432	465	491	-	477	514	542	-
	Lo PR	107	114	125	-	114	121	132	-	118	126	137	-	124	132	144	-	130	138	151	-	134	143	156	-

75	1750	MBh	55.1	56.8	61.5	66.0	53.9	55.5	60.0	64.4	52.6	54.1	58.6	62.9	51.3	52.8	57.2	61.4	48.7	50.2	54.3	58.3	45.1	46.5	50.3	54.0	
		S/T	0.79	0.71	0.53	0.34	0.82	0.73	0.55	0.36	0.84	0.75	0.57	0.36	0.86	0.77	0.59	0.38	0.90	0.80	0.61	0.39	0.91	0.81	0.61	0.39	
		ΔT	23	21	17	12	23	21	17	12	23	21	17	12	23	21	18	12	23	21	17	12	21	20	16	11	
		kW	4.06	4.15	4.27	4.41	4.37	4.46	4.60	4.75	4.64	4.74	4.89	5.04	4.87	4.98	5.14	5.31	5.07	5.19	5.35	5.53	5.25	5.36	5.54	5.72	
		Amps	15.4	15.8	16.3	16.9	16.7	17.1	17.6	18.3	18.1	18.6	19.2	20.0	19.4	19.9	20.6	21.4	20.7	21.2	21.9	22.8	21.9	22.5	23.3	24.2	
		HI PR	262	282	297	310	294	316	334	348	334	359	379	396	396	380	409	432	451	428	460	486	507	473	509	537	560
		LO PR	106	113	124	132	112	120	131	139	117	124	136	145	123	131	143	152	129	137	149	159	133	142	155	165	
		MBh	55.1	56.8	61.5	66.0	53.9	55.5	60.0	64.4	52.6	54.1	58.6	62.9	51.3	52.8	57.2	61.4	48.7	50.2	54.3	58.3	45.1	46.5	50.3	54.0	
		S/T	0.79	0.71	0.53	0.34	0.82	0.73	0.55	0.36	0.84	0.75	0.57	0.36	0.86	0.77	0.59	0.38	0.90	0.80	0.61	0.39	0.91	0.81	0.61	0.39	
		ΔT	23	21	17	12	23	21	17	12	23	21	17	12	23	21	18	12	23	21	17	12	21	20	16	11	
75	1750	kW	4.06	4.15	4.27	4.41	4.37	4.46	4.60	4.75	4.64	4.74	4.89	5.04	4.87	4.98	5.14	5.31	5.07	5.19	5.35	5.53	5.25	5.36	5.54	5.72	
		Amps	15.4	15.8	16.3	16.9	16.7	17.1	17.6	18.3	18.1	18.6	19.2	20.0	19.4	19.9	20.6	21.4	20.7	21.2	21.9	22.8	21.9	22.5	23.3	24.2	
		HI PR	262	282	297	310	294	316	334	348	334	359	379	396	396	380	409	432	451	428	460	486	507	473	509	537	560
		LO PR	106	113	124	132	112	120	131	139	117	124	136	145	123	131	143	152	129	137	149	159	133	142	155	165	
		MBh	55.1	56.8	61.5	66.0	53.9	55.5	60.0	64.4	52.6	54.1	58.6	62.9	51.3	52.8	57.2	61.4	48.7	50.2	54.3	58.3	45.1	46.5	50.3	54.0	
		S/T	0.79	0.71	0.53	0.34	0.82	0.73	0.55	0.36	0.84	0.75	0.57	0.36	0.86	0.77	0.59	0.38	0.90	0.80	0.61	0.39	0.91	0.81	0.61	0.39	
		ΔT	23	21	17	12	23	21	17	12	23	21	17	12	23	21	18	12	23	21	17	12	21	20	16	11	
		kW	4.06	4.15	4.27	4.41	4.37	4.46	4.60	4.75	4.64	4.74	4.89	5.04	4.87	4.98	5.14	5.31	5.07	5.19	5.35	5.53	5.25	5.36	5.54	5.72	
		Amps	15.4	15.8	16.3	16.9	16.7	17.1	17.6	18.3	18.1	18.6	19.2	20.0	19.4	19.9	20.6	21.4	20.7	21.2	21.9	22.8	21.9	22.5	23.3	24.2	
		HI PR	262	282	297	310	294	316	334	348	334	359	379	396	396	380	409	432	451	428	460	486	507	473	509	537	560
LO PR	106	113	124	132	112	120	131	139	117	124	136	145	123	131	143	152	129	137	149	159	133	142	155	165			
2250	2250	MBh	57.1	58.8	63.6	68.3	55.8	57.4	62.1	66.7	54.4	56.0	60.7	65.1	53.1	54.7	59.2	63.5	50.4	51.9	56.2	60.3	46.7	48.1	52.1	55.9	
		S/T	0.84	0.75	0.57	0.36	0.87	0.78	0.59	0.38	0.89	0.80	0.60	0.39	0.92	0.82	0.62	0.40	0.95	0.85	0.65	0.42	0.96	0.86	0.65	0.42	
		ΔT	20	18	15	10	20	18	15	10	20	18	15	10	20	18	15	10	20	18	15	10	18	17	14	10	
		kW	4.13	4.21	4.34	4.48	4.44	4.53	4.67	4.82	4.71	4.81	4.97	5.13	4.95	5.06	5.22	5.40	5.16	5.27	5.44	5.62	5.34	5.45	5.63	5.82	
		Amps	15.7	16.1	16.6	17.2	17.0	17.4	18.0	18.7	18.5	18.9	19.6	20.3	19.8	20.3	21.0	21.8	21.6	22.3	23.2	23.2	22.4	22.9	23.7	24.6	
		HI PR	267	287	303	316	299	322	340	355	341	366	387	404	388	417	441	460	436	470	496	517	482	519	548	571	
		LO PR	109	115	126	134	115	122	133	142	119	127	138	147	125	133	145	155	131	140	152	162	136	144	158	168	
		MBh	57.1	58.8	63.6	68.3	55.8	57.4	62.1	66.7	54.4	56.0	60.7	65.1	53.1	54.7	59.2	63.5	50.4	51.9	56.2	60.3	46.7	48.1	52.1	55.9	
		S/T	0.84	0.75	0.57	0.36	0.87	0.78	0.59	0.38	0.89	0.80	0.60	0.39	0.92	0.82	0.62	0.40	0.95	0.85	0.65	0.42	0.96	0.86	0.65	0.42	
		ΔT	20	18	15	10	20	18	15	10	20	18	15	10	20	18	15	10	20	18	15	10	18	17	14	10	

		OUTDOOR AMBIENT TEMPERATURE																																			
		65°F						75°F						85°F						95°F						105°F						115°F					
		ENTERING INDOOR WET BULB TEMPERATURE																																			
IDB	AIRFLOW	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71								
80	1750	MBh	56.1	57.4	61.3	65.5	54.8	56.0	59.9	64.0	53.5	54.7	58.4	62.5	52.2	53.4	57.0	60.9	49.6	50.7	54.2	57.9	45.9	46.9	50.2	53.6											
		S/T	0.86	0.81	0.66	0.5	0.90	0.84	0.68	0.51	0.92	0.86	0.70	0.5	0.95	0.89	0.72	0.54	0.98	0.92	0.75	0.6	0.99	0.93	0.76	0.57											
		ΔT	25	24	21	17	26	25	22	17	26	25	22	17	26	25	22	17	26	25	21	17	24	23	20	16											
		kW	4.09	4.18	4.31	4.4	4.40	4.49	4.64	4.78	4.67	4.77	4.93	5.1	4.91	5.02	5.18	5.35	5.12	5.23	5.40	5.6	5.29	5.41	5.59	5.77											
		Amps	15.5	15.9	16.4	17.1	16.8	17.2	17.8	18.5	18.3	18.8	19.4	20.1	19.6	20.1	20.8	21.6	20.9	21.4	22.1	23.0	22.2	22.7	23.5	24.4											
	1750	HI PR	264	284	300	313.2	297	319	337	351	337	363	383	399.7	384	413	437	455	432	465	491	512.2	477	514	543	566											
		LO PR	107	114	125	133.0	114	121	132	140	118	126	137	146.0	124	132	144	153	130	138	151	160.7	134	143	154	166											
		MBh	56.1	57.4	61.3	65.5	54.8	56.0	59.9	64.0	53.5	54.7	58.4	62.5	52.2	53.4	57.0	60.9	49.6	50.7	54.2	57.9	45.9	46.9	50.2	53.6											
		S/T	0.86	0.81	0.66	0.5	0.90	0.84	0.68	0.51	0.92	0.86	0.70	0.5	0.95	0.89	0.72	0.54	0.98	0.92	0.75	0.6	0.99	0.93	0.76	0.57											
		ΔT	25	24	21	17	26	25	22	17	26	25	22	17	26	25	22	17	26	25	21	17	24	23	20	16											
1750	kW	4.09	4.18	4.31	4.4	4.40	4.49	4.64	4.78	4.67	4.77	4.93	5.1	4.91	5.02	5.18	5.35	5.12	5.23	5.40	5.6	5.29	5.41	5.59	5.77												
	Amps	15.5	15.9	16.4	17.1	16.8	17.2	17.8	18.5	18.3	18.8	19.4	20.1	19.6	20.1	20.8	21.6	20.9	21.4	22.1	23.0	22.2	22.7	23.5	24.4												
	HI PR	264	284	300	313.2	297	319	337	351	337	363	383	399.7	384	413	437	455	432	465	491	512.2	477	514	543	566												
	LO PR	107	114	125	133.0	114	121	132	140	118	126	137	146.0	124	132	144	153	130	138	151	160.7	134	143	154	166												
	2250	MBh	58.1	59.4	63.4	67.8	56.7	58.0	61.9	66.2	55.4	56.6	60.5	64.6	54.0	55.2	59.0	63.1	51.3	52.5	56.0	59.9	47.6	48.6	51.9	55.5											
S/T		0.92	0.86	0.70	0.5	0.95	0.89	0.73	0.54	1.00	0.92	0.75	0.6	1.00	0.95	0.77	0.58	1.00	1.00	0.80	0.6	1.00	1.00	0.81	0.60												
ΔT		22	21	18	15	22	21	18	15	23	21	18	15	22	21	19	15	21	21	18	15	19	20	17	14												
kW		4.16	4.24	4.38	4.5	4.47	4.57	4.71	4.86	4.75	4.85	5.01	5.2	4.99	5.10	5.27	5.44	5.20	5.32	5.49	5.7	5.38	5.50	5.68	5.87												
Amps		15.8	16.2	16.7	17.4	17.1	17.6	18.1	18.8	18.6	19.1	19.8	20.5	20.0	20.5	21.2	22.0	21.3	21.8	22.6	23.4	22.6	23.1	23.5	24.9												
2250	HI PR	270	290	306	319.5	302	326	344	358	344	370	391	407.7	392	422	445	464	441	474	501	522.4	487	524	553	577												
	LO PR	110	117	127	135.6	116	123	135	143	120	128	140	148.9	126	135	147	156	133	141	154	163.9	137	146	159	170												

85	1750	MBh	57.1	58.2	61.0	65.0	55.8	56.9	59.6	63.5	54.5	55.5	58.1	62.0	53.1	54.2	56.7	60.5	50.5	51.4	53.9	57.5	46.7	47.7	49.9	53.2
		S/T	0.91	0.87	0.79	0.64	0.94	0.91	0.82	0.66	0.96	0.93	0.84	0.68	0.99	0.96	0.87	0.70	1.00	1.00	0.90	0.73	1.00	1.00	0.91	0.74
		ΔT	27	27	25	22	28	27	26	22	28	27	26	22	28	27	26	22	27	27	25	22	25	25	24	21
		kW	4.13	4.21	4.34	4.48	4.44	4.53	4.67	4.82	4.71	4.81	4.97	5.13	4.95	5.06	5.22	5.40	5.16	5.27	5.44	5.63	5.34	5.45	5.63	5.82
		Amps	15.7	16.1	16.6	17.2	17.0	17.4	18.0	18.7	18.5	18.9	19.6	20.3	19.8	20.3	21.0	21.8	21.1	21.6	22.3	23.2	22.4	22.9	23.7	24.6
	HI PR	267	287	303	316	300	322	340	355	341	367	387	404	388	417	441	460	436	470	496	517	482	519	548	572	
	LO PR	109	116	126	134	115	122	133	142	119	127	138	147	125	133	145	155	131	140	152	162	136	144	158	168	
	1750	MBh	57.1	58.2	61.0	65.0	55.8	56.9	59.6	63.5	54.5	55.5	58.1	62.0	53.1	54.2	56.7	60.5	50.5	51.4	53.9	57.5	46.7	47.7	49.9	53.2
		S/T	0.91	0.87	0.79	0.64	0.94	0.91	0.82	0.66	0.96	0.93	0.84	0.68	0.99	0.96	0.87	0.70	1.00	1.00	0.90	0.73	1.00	1.00	0.91	0.74
		ΔT	27	27	25	22	28	27	26	22	28	27	26	22	28	27	26	22	27	27	25	22	25	25	24	21
kW		4.13	4.21	4.34	4.48	4.44	4.53	4.67	4.82	4.71	4.81	4.97	5.13	4.95	5.06	5.22	5.40	5.16	5.27	5.44	5.63	5.34	5.45	5.63	5.82	
Amps		15.7	16.1	16.6	17.2	17.0	17.4	18.0	18.7	18.5	18.9	19.6	20.3	19.8	20.3	21.0	21.8	21.1	21.6	22.3	23.2	22.4	22.9	23.7	24.6	
2250	HI PR	267	287	303	316	300	322	340	355	341	367	387	404	388	417	441	460	436	470	496	517	482	519	548	572	
	LO PR	109	116	126	134	115	122	133	142	119	127	138	147	125	133	145	155	131	140	152	162	136	144	158	168	
	MBh	59.1	60.3	63.1	67.3	57.7	58.8	61.6	65.8	56.4	57.4	60.2	64.2	55.0	56.0	58.7	62.6	52.2	53.2	55.8	59.5	48.4	49.3	51.7	55.1	
	S/T	0.96	0.93	0.84	0.68	1.00	0.96	0.87	0.71	1.00	0.99	0.89	0.72	1.00	1.00	0.92	0.75	1.00	1.00	0.96	0.77	1.00	1.00	0.96	0.78	
	ΔT	23	23	22	19	24	23	22	19	23	23	22	19	22	23	22	19	21	22	22	19	20	20	20	18	

DB: Entering Indoor Dry Bulb Temperature

High and low pressures are measured at the liquid and suction service valves.

Shaded area reflects AHRI conditions

Amps = outdoor unit amps (comp.+fan)

kW = Total system power

		OUTDOOR AMBIENT TEMPERATURE																																			
		65°F						75°F						85°F						95°F						105°F						115°F					
IDB	AIRFLOW	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71	59	63	67	71								
70	1750	MBh	55.4	57.4	62.9	-	54.1	56.1	61.4	-	52.8	54.7	59.9	-	51.5	53.4	58.5	-	48.9	50.7	55.6	-	45.3	47.0	51.5	-	45.3	47.0	51.5	-							
		S/T	0.68	0.57	0.39	-	0.71	0.59	0.41	-	0.72	0.61	0.42	-	0.75	0.62	0.43	-	0.78	0.65	0.45	-	0.78	0.65	0.45	-	0.78	0.65	0.45	-							
		ΔT	20	17	13	-	20	17	13	-	20	17	13	-	20	18	13	-	20	17	13	-	19	16	12	-	19	16	12	-							
		kW	4.00	4.08	4.21	-	4.31	4.40	4.54	-	4.58	4.68	4.84	-	4.82	4.93	5.09	-	5.03	5.14	5.31	-	5.20	5.32	5.50	-	5.20	5.32	5.50	-							
		Amps	15.5	15.9	16.4	-	16.8	17.2	17.8	-	18.3	18.8	19.4	-	19.6	20.1	20.8	-	20.9	21.4	22.2	-	22.2	22.7	23.5	-	22.2	22.7	23.5	-							
70	1500	HI PR	249	268	283	-	280	301	318	-	318	342	362	-	362	390	412	-	408	439	463	-	451	485	512	-	451	485	512	-							
		LO PR	100	106	116	-	105	112	122	-	109	116	127	-	115	122	133	-	120	128	140	-	125	132	145	-	125	132	145	-							
		MBh	53.8	55.7	61.0	-	52.5	54.4	59.6	-	51.3	53.1	58.2	-	50.0	51.8	56.8	-	47.5	49.2	53.9	-	44.0	45.6	50.0	-	44.0	45.6	50.0	-							
		S/T	0.65	0.54	0.38	-	0.67	0.56	0.39	-	0.69	0.58	0.40	-	0.71	0.60	0.41	-	0.74	0.62	0.43	-	0.75	0.62	0.43	-	0.75	0.62	0.43	-							
		ΔT	21	19	14	-	22	19	14	-	22	19	14	-	22	19	14	-	22	19	14	-	20	17	13	-	20	17	13	-							
70	1500	kW	3.97	4.05	4.18	-	4.27	4.37	4.51	-	4.54	4.64	4.80	-	4.78	4.89	5.05	-	4.99	5.10	5.27	-	5.16	5.28	5.45	-	5.16	5.28	5.45	-							
		Amps	15.4	15.8	16.3	-	16.7	17.1	17.7	-	18.1	18.6	19.2	-	19.4	19.9	20.6	-	20.7	21.2	22.0	-	22.0	22.5	23.3	-	22.0	22.5	23.3	-							
		HI PR	247	266	281	-	277	298	315	-	315	339	358	-	359	386	408	-	404	434	459	-	446	480	507	-	446	480	507	-							
		LO PR	99	105	115	-	104	111	121	-	108	115	126	-	114	121	132	-	119	127	138	-	123	131	143	-	123	131	143	-							
		2250	2250	MBh	55.6	57.7	63.2	-	54.3	56.3	61.7	-	53.0	55.0	60.2	-	51.8	53.6	58.8	-	49.2	51.0	55.8	-	45.5	47.2	51.7	-	45.5	47.2	51.7	-					
S/T	0.69			0.58	0.40	-	0.72	0.60	0.41	-	0.73	0.61	0.43	-	0.76	0.63	0.44	-	0.79	0.66	0.46	-	0.79	0.66	0.46	-	0.79	0.66	0.46	-							
ΔT	16			14	10	-	16	14	10	-	16	14	10	-	16	14	11	-	16	14	10	-	15	13	10	-	15	13	10	-							
kW	4.03			4.12	4.25	-	4.34	4.44	4.58	-	4.62	4.72	4.88	-	4.86	4.97	5.13	-	5.07	5.18	5.36	-	5.25	5.37	5.55	-	5.25	5.37	5.55	-							
Amps	15.7			16.1	16.6	-	17.0	17.4	18.0	-	18.5	19.0	19.6	-	19.8	20.3	21.0	-	21.1	21.6	22.4	-	22.4	23.0	23.7	-	22.4	23.0	23.7	-							
2250	2250	HI PR	252	271	286	-	283	304	321	-	321	346	365	-	366	394	416	-	412	443	468	-	455	490	517	-	455	490	517	-							
		LO PR	101	107	117	-	106	113	123	-	110	118	128	-	116	123	135	-	122	129	141	-	126	134	146	-	126	134	146	-							

75	1750	MBh	56.3	58.0	62.7	67.3	55.0	56.6	61.3	65.8	53.7	55.3	59.8	64.2	52.4	53.9	58.4	62.6	49.8	51.2	55.5	59.5
		S/T	0.78	0.69	0.52	0.34	0.80	0.72	0.54	0.35	0.82	0.74	0.56	0.36	0.85	0.76	0.58	0.37	0.88	0.79	0.60	0.38
		ΔT	23	21	17	12	23	21	18	12	23	21	18	12	23	22	18	12	23	21	17	12
		kW	4.03	4.12	4.25	4.39	4.34	4.44	4.58	4.73	4.62	4.72	4.88	5.04	4.86	4.97	5.14	5.31	5.07	5.18	5.36	5.54
		Amps	15.7	16.1	16.6	17.2	17.0	17.4	18.0	18.7	18.5	19.0	19.6	20.4	19.8	20.3	21.0	21.8	21.1	21.6	22.4	23.3
1500		MBh	54.7	56.3	60.9	65.4	53.4	55.0	59.5	63.9	52.1	53.7	58.1	62.3	50.9	52.4	56.7	60.8	48.3	49.7	53.8	57.8
		S/T	0.74	0.66	0.50	0.32	0.77	0.69	0.52	0.33	0.79	0.70	0.53	0.34	0.81	0.73	0.55	0.35	0.84	0.75	0.57	0.37
		ΔT	25	23	19	13	25	23	19	13	25	23	19	13	25	23	19	13	25	23	19	13
		kW	4.00	4.09	4.21	4.35	4.31	4.40	4.54	4.69	4.58	4.68	4.84	5.00	4.82	4.93	5.09	5.26	5.03	5.14	5.31	5.49
		Amps	15.5	15.9	16.5	17.1	16.8	17.2	17.8	18.5	18.3	18.8	19.4	20.2	19.6	20.1	20.8	21.6	20.9	21.4	22.2	23.0
2250		MBh	56.6	58.3	63.1	67.7	55.3	56.9	61.6	66.1	53.9	55.5	60.1	64.5	52.6	54.2	58.7	63.0	50.0	51.5	55.7	59.8
		S/T	0.79	0.70	0.53	0.34	0.81	0.73	0.55	0.35	0.84	0.75	0.57	0.36	0.86	0.77	0.58	0.38	0.89	0.80	0.61	0.39
		ΔT	18	17	14	9	18	17	14	10	18	17	14	10	19	17	14	10	18	17	14	10
		kW	4.06	4.15	4.28	4.42	4.38	4.47	4.62	4.77	4.66	4.76	4.92	5.08	4.90	5.01	5.18	5.35	5.11	5.23	5.40	5.59
		Amps	15.8	16.2	16.8	17.4	17.1	17.6	18.2	18.9	18.7	19.1	19.8	20.6	20.0	20.5	21.2	22.0	21.3	21.8	22.6	23.5

IDB: Entering Indoor Dry Bulb Temperature
 High and low pressures are measured at the liquid and suction service valves.
 Shaded area reflects ACCA (TVA) conditions
 Amps = outdoor unit amps (comp.+fan)
 kW = Total system power

OUTDOOR UNIT	INDOOR UNITS		COOLING RATINGS				CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL ¹	SENS. ¹	SEER ²	EER ³		
ANX13 0181B*	ACNF18XX16D*		16,800	13,400	13.0	10.8	575	10097387
	ACNF24XX16D*		17,000	13,600	13.0	10.8	600	10097388
	ARUF18B14A*		17,200	13,800	13.0	11.0	590	10097389
	ARUF18B14A*+TXV+HSK		17,200	13,800	13.0	11.0	590	10097390
	ARUF24B14C*		17,200	13,800	13.0	11.0	590	10097391
	ARUF24B14C*+TXV+HSK		17,200	13,800	13.5	11.0	590	10097392
	ARUF25B14A*		18,000	14,400	13.0	11.0	610	10097393
	ASPT24B14A*+HSK		17,600	14,100	14.0	12.0	550	10097394
	ASPT25B14A*+HSK		17,600	14,100	14.0	12.0	580	10097395
	ASPT29B14A*+HSK		18,000	14,400	14.0	12.0	560	10097396
	ASPT30C14A*+HSK		18,000	14,400	14.0	12.0	665	10097397
	ASPT33C14B*+HSK		18,000	14,400	14.0	12.0	615	201834837
	AVPTC24B14A*+HSK		17,600	14,100	14.0	12.0	550	10097398
	AVPTC25B14A*+HSK		17,800	14,200	14.0	12.0	615	10097399
	AVPTC29B14A*+HSK		18,000	14,400	14.0	12.0	585	10097400
	AVPTC30C14A*+HSK		18,000	14,400	14.0	12.0	640	10097401
	AWUF18XX16B*		17,400	13,900	13.0	11.0	610	10097402
	AWUF31XX16A*		17,400	13,900	14.0	11.0	550	10097403
	CA*F1824*6D*	A*EC960303ANA*	17,800	14,100	13.5	11.5	650	10517475
	CA*F1824*6D*	A*EC960403ANA*	17,800	14,100	13.5	11.5	610	10517480
	CA*F1824*6D*	A*EC960603ANA*	17,400	13,800	14.0	11.5	580	10517485
	CA*F1824*6D*	A*EC960403BNA*	17,800	13,600	13.5	11.5	625	10338506
	CA*F1824*6D*	A*EC960302BNA*	17,800	14,200	14.0	11.5	600	10097404
	CA*F1824*6D*	A*EC960402BNA*	17,800	14,200	14.0	11.5	600	10097406
	CA*F1824*6D*	A*EC960603BNA*	17,400	13,900	14.0	11.5	550	10097408
	CA*F1824*6D*	A*EC960803BNA*	17,800	14,200	14.0	11.5	575	10097410
	CA*F1824*6D*	A*EH800603B*A*	17,800	14,200	14.0	11.5	590	10097412
	CA*F1824*6D*	A*VC80603B*B*	17,800	14,200	14.0	11.5	615	10097415
	CA*F1824*6D*	A*VC80604B*B*	17,700	14,200	14.0	11.6	600	10097417
	CA*F1824*6D*	A*VC80803B*B*	17,800	14,200	14.0	11.5	610	10097418
	CA*F1824*6D*	A*VC960403BNA*	17,800	14,200	14.0	11.5	625	10097420
	CA*F1824*6D*	A*VC960603BNA*	17,800	14,200	14.0	11.5	620	10097422
	CA*F1824*6D*	A*VC960803BNA*	17,800	14,200	14.0	11.5	610	10097424
	CA*F1824*6D*	A*VM970603BNA*	17,800	14,200	14.0	11.5	610	10097426
	CA*F1824*6D*	A*VM970803BNA*	17,800	14,200	14.0	11.5	610	10097428
	CA*F1824*6D*+EEP		17,800	14,200	13.0	11.0	650	10097375
	CA*F1824*6D*+MBVC1200*-1A*		18,200	14,600	14.0	11.5	660	10097376
	CA*F1824*6D*+TXV	A*EC960403BNA*	17,800	13,600	14.0	12.0	625	10338828
	CA*F1824*6D*+TXV+HSK	A*EC960303ANA*	17,800	14,100	14.0	12.0	650	10517476
	CA*F1824*6D*+TXV+HSK	A*EC960403ANA*	17,800	14,100	14.0	11.5	610	10517481
	CA*F1824*6D*+TXV+HSK	A*EC960603ANA*	17,400	13,800	14.0	12.0	580	10517486
	CA*F1824*6D*+TXV+HSK	A*EC960803BNA*	17,800	14,200	14.0	11.5	575	10097411
	CA*F1824*6D*+TXV+HSK	A*EC960603BNA*	17,400	13,900	14.0	11.5	550	10097409
	CA*F1824*6D*+TXV+HSK	A*EC960402BNA*	17,800	14,200	14.0	11.5	600	10097407
	CA*F1824*6D*+TXV+HSK	A*EC960302BNA*	17,800	14,200	14.0	11.5	600	10097405
	CA*F1824*6D*+TXV+HSK	A*VM970803BNA*	17,800	14,200	14.0	11.5	610	10097429
	CA*F1824*6D*+TXV+HSK	A*VM970603BNA*	17,800	14,200	14.0	11.5	610	10097427
	CA*F1824*6D*+TXV+HSK	A*VC960803BNA*	17,800	14,200	14.0	11.5	610	10097425
	CA*F1824*6D*+TXV+HSK	A*VC960603BNA*	17,800	14,200	14.0	11.5	620	10097423

See Notes on Page 51.

OUTDOOR UNIT	INDOOR UNITS		COOLING RATINGS				CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL ¹	SENS. ¹	SEER ²	EER ³		
ANX13 0181B* (Contd.)	CA*F1824*6D*+TXV+HSK	A*VC960403BNA*	17,800	14,200	14.0	11.5	625	10097421
	CA*F1824*6D*+TXV+HSK	A*VC80803B*B*	18,000	14,400	14.0	11.5	610	10097419
	CA*F1824*6D*+TXV+HSK	A*VC80603B*B*	18,000	14,400	14.0	11.5	615	10097416
	CA*F3030*6D*+EEP		17,900	14,300	13.0	11.0	650	10097377
	CA*F3030*6D*+EEP+TXV+HSK		17,900	14,300	13.0	11.0	650	10097378
	CA*F3131*6D*+EEP		18,000	14,400	13.0	11.0	650	10097379
	CA*F3131*6D*+EEP+TXV+HSK		18,000	14,400	13.0	11.0	650	10097380
	CA*F3636*6D*	A*VC80603B*B*	18,000	14,400	14.0	11.5	615	10099258
	CA*F3636*6D*	A*VC80803B*B*	18,000	14,400	14.0	11.5	610	10099272
	CA*F3636*6D*	A*VC960403BNA*	18,400	14,700	14.0	11.5	625	10099283
	CA*F3636*6D*	A*VC960603BNA*	18,400	14,700	14.0	11.5	620	10099294
	CA*F3636*6D*	A*VC960803BNA*	18,400	14,700	14.0	11.5	610	10099305
	CA*F3636*6D*	A*VM970603BNA*	18,400	14,700	14.0	11.5	610	10099316
	CA*F3636*6D*	A*VM970803BNA*	18,400	14,700	14.0	11.5	610	10099327
	CA*F3636*6D*+TXV+HSK	A*VM970803BNA*	18,400	14,700	14.0	11.5	610	10099328
	CA*F3636*6D*+TXV+HSK	A*VM970603BNA*	18,400	14,700	14.0	11.5	610	10099317
	CA*F3636*6D*+TXV+HSK	A*VC960803BNA*	18,400	14,700	14.0	11.5	610	10099306
	CA*F3636*6D*+TXV+HSK	A*VC960603BNA*	18,400	14,700	14.0	11.5	620	10099295
	CA*F3636*6D*+TXV+HSK	A*VC960403BNA*	18,400	14,700	14.0	11.5	625	10099284
	CA*F3636*6D*+TXV+HSK	A*VC80803B*B*	18,000	14,400	14.0	11.5	610	10099273
	CA*F3636*6D*+TXV+HSK	A*VC80603B*B*	18,000	14,400	14.0	11.5	615	10099259
	CAPT3131*4A*	A*EC960403BNA*	18,000	13,700	14.0	12.0	625	10338829
	CAPT3131*4A*+EEP+HSK		18,000	14,400	13.0	11.0	650	10097381
	CAPT3131*4A*+HSK	A*EC960303ANA*	17,800	14,100	13.5	11.5	650	10517477
	CAPT3131*4A*+HSK	A*EC960403ANA*	17,800	14,100	13.5	11.5	610	10517482
	CAPT3131*4A*+HSK	A*EC960603ANA*	17,400	13,800	14.0	12.0	580	10517487
	CAPT3131*4A*+HSK	A*VC80603B*B*	18,000	14,400	14.0	11.5	615	10099260
	CAPT3131*4A*+HSK	A*EC960402BNA*	17,800	14,200	14.0	11.5	600	10099208
	CAPT3131*4A*+HSK	A*EC960603BNA*	17,400	13,900	14.0	11.5	550	10099211
	CAPT3131*4A*+HSK	A*EC960803BNA*	17,800	14,200	14.0	11.5	575	10099214
	CAPT3131*4A*+HSK	A*VC80604B*B*	18,000	14,400	14.0	11.5	600	10099269
	CAPT3131*4A*+HSK	A*EC960302BNA*	17,800	14,200	14.0	11.5	600	10099205
	CAPT3131*4A*+HSK	A*VC80803B*B*	18,000	14,400	14.0	11.5	610	10099274
	CAPT3131*4A*+HSK	A*VC960403BNA*	18,000	14,400	14.0	11.5	625	10099285
	CAPT3131*4A*+HSK	A*VC960603BNA*	18,000	14,400	14.0	11.5	620	10099296
	CAPT3131*4A*+HSK	A*VC960803BNA*	18,000	14,400	14.0	11.5	610	10099307
	CAPT3131*4A*+HSK	A*VM970603BNA*	18,000	14,400	14.0	11.5	610	10099318
	CAPT3131*4A*+HSK	A*VM970803BNA*	18,000	14,400	14.0	11.5	610	10099329
	CAPT3131*4A*+HSK	A*EH800603B*A*	18,000	14,400	14.0	11.5	590	10099233
	CAPT3131*4A*+HSK	ADVC80603B*B*	18,000	14,400	14.0	11.5	600	10102527
	CAPT3131*4A*+MBVC1200**~1A*+HSK		18,000	14,400	14.0	11.5	660	10097382
	CHPF1824A6C*+EEP		17,500	14,000	13.0	11.0	650	10097383
	CHPF2430B6C*	A*EC960303ANA*	17,800	14,100	13.5	11.5	650	10517478
	CHPF2430B6C*	A*EC960403ANA*	17,800	14,100	13.5	11.5	610	10517483
	CHPF2430B6C*	A*EC960603ANA*	17,400	13,800	14.0	11.5	580	10517488
	CHPF2430B6C*	A*EC960403BNA*	18,000	13,700	13.5	11.5	625	10338507
	CHPF2430B6C*	A*EH800603B*A*	18,000	14,400	14.0	11.5	590	10097413
	CHPF2430B6C*	A*EC960302BNA*	17,800	14,200	14.0	11.5	600	10099206
	CHPF2430B6C*	A*VC80604B*B*	17,700	14,200	14.0	11.5	600	10099270

See Notes on Page 51.

OUTDOOR UNIT	INDOOR UNITS		COOLING RATINGS				CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL ¹	SENS. ¹	SEER ²	EER ³		
ANX13 0181B* (Contd.)	CHPF2430B6C*	A*EC960803BNA*	17,800	14,200	14.0	11.5	575	10099215
	CHPF2430B6C*	A*EC960603BNA*	17,400	13,900	14.0	11.5	550	10099212
	CHPF2430B6C*	A*EC960402BNA*	17,800	14,200	14.0	11.5	600	10099209
	CHPF2430B6C*	A*VC80603B*B*	18,000	14,400	14.0	11.5	615	10099261
	CHPF2430B6C*	A*VM970803BNA*	18,000	14,400	14.0	11.5	610	10099330
	CHPF2430B6C*	A*VM970603BNA*	18,000	14,400	14.0	11.5	610	10099319
	CHPF2430B6C*	A*VC960803BNA*	18,000	14,400	14.0	11.5	610	10099308
	CHPF2430B6C*	A*VC960603BNA*	18,000	14,400	14.0	11.5	620	10099297
	CHPF2430B6C*	A*VC960403BNA*	18,000	14,400	14.0	11.5	625	10099286
	CHPF2430B6C*	A*VC80803B*B*	18,000	14,400	14.0	11.5	610	10099275
	CHPF2430B6C*+EEP		18,000	14,400	13.0	11.0	650	10097384
	CHPF2430B6C*+MBVC1200**~1A*		18,200	14,600	14.0	11.5	660	10097385
	CHPF2430B6C*+TXV	A*EC960403BNA*	18,000	13,700	14.0	12.0	625	10338830
	CHPF2430B6C*+TXV+HSK	A*EC960303ANA*	17,800	14,100	14.0	12.0	650	10517479
	CHPF2430B6C*+TXV+HSK	A*EC960403ANA*	17,800	14,100	14.0	11.5	610	10517484
	CHPF2430B6C*+TXV+HSK	A*EC960603ANA*	17,400	13,800	14.0	11.5	580	10517489
	CHPF2430B6C*+TXV+HSK	A*VC80603B*B*	18,000	14,400	14.0	11.5	615	10099262
	CHPF2430B6C*+TXV+HSK	A*EC960402BNA*	17,800	14,200	14.0	11.5	600	10099210
	CHPF2430B6C*+TXV+HSK	A*EC960603BNA*	17,400	13,900	14.0	11.5	550	10099213
	CHPF2430B6C*+TXV+HSK	A*EC960803BNA*	17,800	14,200	14.0	11.5	575	10099216
	CHPF2430B6C*+TXV+HSK	A*EC960302BNA*	17,800	14,200	14.0	11.5	600	10099207
	CHPF2430B6C*+TXV+HSK	A*VC80803B*B*	18,000	14,400	14.0	11.5	610	10099276
	CHPF2430B6C*+TXV+HSK	A*VC960403BNA*	18,000	14,400	14.0	11.5	625	10099287
	CHPF2430B6C*+TXV+HSK	A*VC960603BNA*	18,000	14,400	14.0	11.5	620	10099298
	CHPF2430B6C*+TXV+HSK	A*VC960803BNA*	18,000	14,400	14.0	11.5	610	10099309
	CHPF2430B6C*+TXV+HSK	A*VM970603BNA*	18,000	14,400	14.0	11.5	610	10099320
	CHPF2430B6C*+TXV+HSK	A*VM970803BNA*	18,000	14,400	14.0	11.5	610	10099331
	CHPF3636B6C*	A*VM970803BNA*	18,200	14,600	14.0	11.5	630	10099332
	CHPF3636B6C*	A*VM970603BNA*	18,200	14,600	14.0	11.5	620	10099321
	CHPF3636B6C*	A*VC960803BNA*	18,200	14,600	14.0	11.5	630	10099310
	CHPF3636B6C*	A*VC960603BNA*	18,200	14,600	14.0	11.5	610	10099299
	CHPF3636B6C*	A*VC960403BNA*	18,200	14,600	14.0	11.5	610	10099288
	CHPF3636B6C*	A*VC80803B*B*	17,600	14,100	14.0	11.5	610	10099277
	CHPF3636B6C*	A*VC80603B*B*	17,600	14,100	14.0	11.5	600	10099263
	CHPF3636B6C*+TXV+HSK	A*VC80603B*B*	17,600	14,100	14.0	11.5	600	10099264
	CHPF3636B6C*+TXV+HSK	A*VC80803B*B*	17,600	14,100	14.0	11.5	610	10099278
	CHPF3636B6C*+TXV+HSK	A*VC960403BNA*	18,200	14,600	14.0	11.5	610	10099289
	CHPF3636B6C*+TXV+HSK	A*VC960603BNA*	18,200	14,600	14.0	11.5	610	10099300
	CHPF3636B6C*+TXV+HSK	A*VC960803BNA*	18,200	14,600	14.0	11.5	630	10099311
	CHPF3636B6C*+TXV+HSK	A*VM970603BNA*	18,200	14,600	14.0	11.5	620	10099322
	CHPF3636B6C*+TXV+HSK	A*VM970803BNA*	18,200	14,600	14.0	11.5	630	10099333
	CSCF1824N6D*	A*VM970803BNA*	18,000	14,400	14.0	11.5	610	10099334
	CSCF1824N6D*	A*VM970603BNA*	18,000	14,400	14.0	11.5	610	10099323
	CSCF1824N6D*	A*VC960803BNA*	18,000	14,400	14.0	11.5	610	10099312
	CSCF1824N6D*	A*VC960603BNA*	18,000	14,400	14.0	11.5	620	10099301
	CSCF1824N6D*	A*VC960403BNA*	18,000	14,400	14.0	11.5	625	10099290
	CSCF1824N6D*	A*VC80803B*B*	18,000	14,400	14.0	11.5	610	10099279
	CSCF1824N6D*	A*VC80603B*B*	18,000	14,400	14.0	11.5	615	10099265
	CSCF1824N6D*	A*VC80604B*B*	17,700	14,200	14.0	11.5	600	10099271

See Notes on Page 51.

OUTDOOR UNIT	INDOOR UNITS		COOLING RATINGS				CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL ¹	SENS. ¹	SEER ²	EER ³		
ANX13 0181B* (Contd.)	CSCF1824N6D*	A*EH800603B*A*	18,000	14,400	14.0	11.5	590	10097414
	CSCF1824N6D*+EEP		18,000	14,400	13.0	11.0	650	10097386
	CSCF1824N6D*+TXV+HSK	A*VC80603B*B*	18,000	14,400	14.0	11.5	615	10099266
	CSCF1824N6D*+TXV+HSK	A*VC80803B*B*	18,000	14,400	14.0	11.5	610	10099280
	CSCF1824N6D*+TXV+HSK	A*VC960403BNA*	18,000	14,400	14.0	11.5	625	10099291
	CSCF1824N6D*+TXV+HSK	A*VC960603BNA*	18,000	14,400	14.0	11.5	620	10099302
	CSCF1824N6D*+TXV+HSK	A*VC960803BNA*	18,000	14,400	14.0	11.5	610	10099313
	CSCF1824N6D*+TXV+HSK	A*VM970603BNA*	18,000	14,400	14.0	11.5	610	10099324
	CSCF1824N6D*+TXV+HSK	A*VM970803BNA*	18,000	14,400	14.0	11.5	610	10099335
	CSCF3036N6D*	A*VM970803BNA*	18,200	14,600	14.0	11.5	610	10099336
	CSCF3036N6D*	A*VM970603BNA*	18,200	14,600	14.0	11.5	610	10099325
	CSCF3036N6D*	A*VC960803BNA*	18,200	14,600	14.0	11.5	610	10099314
	CSCF3036N6D*	A*VC960603BNA*	18,200	14,600	14.0	11.5	620	10099303
	CSCF3036N6D*	A*VC960403BNA*	18,200	14,600	14.0	11.5	625	10099292
	CSCF3036N6D*	A*VC80803B*B*	17,800	14,200	14.0	11.5	610	10099281
	CSCF3036N6D*	A*VC80603B*B*	17,800	14,200	14.0	11.5	615	10099267
	CSCF3036N6D*+TXV+HSK	A*VC80603B*B*	17,800	14,200	14.0	11.5	615	10099268
	CSCF3036N6D*+TXV+HSK	A*VC80803B*B*	17,800	14,200	14.0	11.5	610	10099282
	CSCF3036N6D*+TXV+HSK	A*VC960403BNA*	18,200	14,600	14.0	11.5	625	10099293
	CSCF3036N6D*+TXV+HSK	A*VC960603BNA*	18,200	14,600	14.0	11.5	620	10099304
	CSCF3036N6D*+TXV+HSK	A*VC960803BNA*	18,200	14,600	14.0	11.5	610	10099315
	CSCF3036N6D*+TXV+HSK	A*VM970603BNA*	18,200	14,600	14.0	11.5	610	10099326
	CSCF3036N6D*+TXV+HSK	A*VM970803BNA*	18,200	14,600	14.0	11.5	610	10099337
	CAPFA1818*6A*+EEP		18,200	13,900	11.2	13.0	650	201953138
	CAPFA1818*6A*	A*VC80603B*C*	18,400	14,000	12.2	14.5	620	201953139
	CAPFA1818*6A*+TXV+HSK	A*VC80603B*C*	18,400	14,000	12.2	14.5	620	201953140
	CAPFA1818*6A*	A*VC80803B*C*	18,400	14,000	12.2	14.5	620	201953141
	CAPFA1818*6A*+TXV+HSK	A*VC80803B*C*	18,400	14,000	12.2	14.5	620	201953142
	CAPFA1818*6A*	A*VC960403BNB*	18,400	14,000	12.2	14.0	620	201953143
	CAPFA1818*6A*+TXV+HSK	A*VC960403BNB*	18,400	14,000	12.2	14.5	620	201953144
	CAPFA1818*6A*	A*VC960603BNB*	18,400	14,000	12.2	14.0	620	201953145
	CAPFA1818*6A*+TXV+HSK	A*VC960603BNB*	18,400	14,000	12.2	14.5	620	201953146
	CAPFA1818*6A*	A*VC960803BNB*	18,400	14,000	12.2	14.0	620	201953147
	CAPFA1818*6A*+TXV+HSK	A*VC960803BNB*	18,400	14,000	12.2	14.5	620	201953148
	CAPFA1818*6A*	A*VM970603BNA*	18,400	14,000	12.2	14.0	620	201953149
	CAPFA1818*6A*+TXV+HSK	A*VM970603BNA*	18,400	14,000	12.2	14.5	620	201953150
	CAPFA1818*6A*	A*VM970803BNA*	18,400	14,000	12.2	14.0	620	201953151
	CAPFA1818*6A*+TXV+HSK	A*VM970803BNA*	18,400	14,000	12.2	14.5	620	201953152
ANX13 0241B*	ACNF24XX16D*		22,400	16,600	13.0	11.0	770	9039106
	ACNF30XX16D*		22,600	16,700	13.0	11.0	845	9039113
	ARUF24B14C*+TXV+HSK		22,000	16,300	13.0	11.0	800	9039105
	ARUF29B14A*		23,400	17,300	13.0	11.0	860	9039110
	ASPT24B14A*+HSK		23,000	17,000	13.8	11.8	810	9039116
	ASPT25B14A*+HSK		23,000	17,000	14.0	12.0	800	9039151
	ASPT29B14A*+HSK		23,800	17,600	14.0	12.0	790	9039348
	ASPT30C14A*+HSK		23,400	17,300	14.0	12.0	845	9039286
	ASPT33C14B*+HSK		23,400	17,300	14.0	12.0	820	201834838
	AVPTC24B14A*+HSK		22,600	16,700	14.0	12.0	800	9039117
	AVPTC25B14A*		23,000	17,000	14.0	12.0	850	8996504

See Notes on Page 51.

OUTDOOR UNIT	INDOOR UNITS		COOLING RATINGS				CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL ¹	SENS. ¹	SEER ²	EER ³		
ANX13 0241B* (Contd.)	AVPTC25B14A*+HSK		23,000	17,000	14.0	12.0	850	9114183
	AVPTC29B14A*		23,400	17,300	14.0	12.0	795	8996505
	AVPTC29B14A*+HSK		23,400	17,300	14.0	12.0	795	9114184
	AVPTC30C14A*+HSK		23,400	17,300	14.0	12.0	780	9039299
	AWUF24XX16B*		23,000	17,000	13.0	11.0	800	9039109
	AWUF30XX16B*		23,200	17,200	13.0	11.0	800	9039115
	AWUF31XX16A*		23,000	17,000	14.0	11.3	800	9039169
	AWUF32XX16A*		23,000	17,000	14.0	11.3	800	9039130
	CA*F1824*6D*	A*EC960303ANA*	23,000	17,000	13.5	11.5	800	10516369
	CA*F1824*6D*	A*EC960403ANA*	23,000	17,000	13.5	11.5	800	10516374
	CA*F1824*6D*	A*EC960603ANA*	23,000	17,000	13.5	11.5	775	10516366
	CA*F1824*6D*	A*EC960403BNA*	22,600	16,700	14.0	11.5	800	10338508
	CA*F1824*6D*	A*EC960803BNA*	23,000	17,000	14.0	11.5	775	9039239
	CA*F1824*6D*	G*VM970804CNA*	23,000	17,000	14.0	11.5	800	9039191
	CA*F1824*6D*	G*VC960403BNA*	23,000	17,000	14.0	11.5	805	9039143
	CA*F1824*6D*	G*VC960803BNA*	23,000	17,000	14.0	11.5	810	9039145
	CA*F1824*6D*	G*EC960302BNA*	23,000	17,000	14.0	11.5	800	9039214
	CA*F1824*6D*	A*VC80604B*B*	23,000	17,000	14.0	11.6	820	9039155
	CA*F1824*6D*	G*VC960804CNA*	23,000	17,000	14.0	11.5	800	9039129
	CA*F1824*6D*	A*VM970804CNA*	23,000	17,000	14.0	11.5	800	9039126
	CA*F1824*6D*	G*E80603B*B*	23,000	17,000	14.0	11.5	860	9039157
	CA*F1824*6D*	G*VC80604B*B*	23,000	17,000	14.0	11.6	820	9039122
	CA*F1824*6D*	A*EH800603B*A*	23,000	17,000	14.0	11.5	860	9039172
	CA*F1824*6D*	G*VC960603BNA*	23,000	17,000	14.0	11.5	815	9039197
	CA*F1824*6D*	A*VC960603BNA*	23,000	17,000	14.0	11.5	815	9039159
	CA*F1824*6D*	G*EC960803BNA*	23,000	17,000	14.0	11.5	775	9039224
	CA*F1824*6D*	A*EC960302BNA*	23,000	17,000	14.0	11.5	800	9039162
	CA*F1824*6D*	G*VM970603BNA*	23,000	17,000	14.0	11.5	815	9039192
	CA*F1824*6D*	A*VM970803BNA*	23,000	17,000	14.0	11.5	810	9039231
	CA*F1824*6D*	G*VM970803BNA*	23,000	17,000	14.0	11.5	810	9039173
	CA*F1824*6D*	G*EC960603BNA*	23,000	17,000	14.0	11.5	775	9039236
	CA*F1824*6D*	A*VC960804CNA*	23,000	17,000	14.0	11.5	800	9039217
	CA*F1824*6D*	A*EC960603BNA*	23,000	17,000	14.0	11.5	775	9039141
	CA*F1824*6D*	A*EC960402BNA*	23,000	17,000	14.0	11.5	775	9039218
	CA*F1824*6D*	A*VC960403BNA*	23,000	17,000	14.0	11.5	805	9039221
	CA*F1824*6D*	A*VC960803BNA*	23,000	17,000	14.0	11.5	810	9039134
	CA*F1824*6D*	G*EC960402BNA*	23,000	17,000	14.0	11.5	775	9039188
	CA*F1824*6D*	A*VM970603BNA*	23,000	17,000	14.0	11.5	815	9039184
	CA*F1824*6D*+EEP		23,000	17,000	13.0	11.0	800	9039112
	CA*F1824*6D*+MBVC1200*-1A*		23,000	17,000	14.0	11.5	800	9039177
	CA*F1824*6D*+TXV+HSK	A*EC960303ANA*	23,000	17,000	14.0	11.5	800	10516370
	CA*F1824*6D*+TXV+HSK	A*EC960403ANA*	23,000	17,000	14.0	11.5	800	10516375
	CA*F1824*6D*+TXV+HSK	A*EC960603ANA*	23,000	17,000	14.0	11.5	775	10516367
	CA*F1824*6D*+TXV+HSK	A*EC960403BNA*	22,600	16,700	14.0	12.0	800	10338509
	CA*F1824*6D*+TXV+HSK	G*EC960803BNA*	23,000	17,000	14.0	11.5	775	9039144
	CA*F1824*6D*+TXV+HSK	A*VC960603BNA*	23,000	17,000	14.0	11.5	815	9039233
	CA*F1824*6D*+TXV+HSK	A*VC960804CNA*	23,000	17,000	14.0	11.5	800	9039207
	CA*F1824*6D*+TXV+HSK	A*VC960403BNA*	23,000	17,000	14.0	11.5	805	9039168
	CA*F1824*6D*+TXV+HSK	A*VM970803BNA*	23,000	17,000	14.0	11.5	810	9039182

See Notes on Page 51.

OUTDOOR UNIT	INDOOR UNITS		COOLING RATINGS				CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL ¹	SENS. ¹	SEER ²	EER ³		
ANX13 0241B* (Contd.)	CA*F1824*6D*+TXV+HSK	G*VC960803BNA*	23,000	17,000	14.0	11.5	810	9039133
	CA*F1824*6D*+TXV+HSK	G*EC960302BNA*	23,000	17,000	14.0	11.5	800	9039166
	CA*F1824*6D*+TXV+HSK	A*VC960803BNA*	23,000	17,000	14.0	11.5	810	9039167
	CA*F1824*6D*+TXV+HSK	A*VM970804CNA*	23,000	17,000	14.0	11.5	800	9039136
	CA*F1824*6D*+TXV+HSK	G*VM970603BNA*	23,000	17,000	14.0	11.5	815	9039131
	CA*F1824*6D*+TXV+HSK	G*VC960603BNA*	23,000	17,000	14.0	11.5	815	9039229
	CA*F1824*6D*+TXV+HSK	G*VM970804CNA*	23,000	17,000	14.0	11.5	800	9039175
	CA*F1824*6D*+TXV+HSK	A*EC960302BNA*	23,000	17,000	14.0	11.5	800	9039234
	CA*F1824*6D*+TXV+HSK	A*EC960803BNA*	23,000	17,000	14.0	11.5	775	9039139
	CA*F1824*6D*+TXV+HSK	G*EC960603BNA*	23,000	17,000	14.0	11.5	775	9039156
	CA*F1824*6D*+TXV+HSK	A*VM970603BNA*	23,000	17,000	14.0	11.5	815	9039216
	CA*F1824*6D*+TXV+HSK	A*EC960603BNA*	23,000	17,000	14.0	11.5	775	9039226
	CA*F1824*6D*+TXV+HSK	G*EC960402BNA*	23,000	17,000	14.0	11.5	775	9039242
	CA*F1824*6D*+TXV+HSK	G*VC960403BNA*	23,000	17,000	14.0	11.5	805	9039183
	CA*F1824*6D*+TXV+HSK	G*VC960804CNA*	23,000	17,000	14.0	11.5	800	9039152
	CA*F1824*6D*+TXV+HSK	G*VM970803BNA*	23,000	17,000	14.0	11.5	810	9039206
	CA*F1824*6D*+TXV+HSK	A*EC960402BNA*	23,000	17,000	14.0	11.5	775	9039147
	CA*F3030*6D*+EEP		23,000	17,000	13.0	11.0	800	9039100
	CA*F3030*6D*+EEP+TXV+HSK		23,000	17,000	13.0	11.0	800	9039099
	CA*F3131*6D*+EEP		23,000	17,000	13.0	11.0	800	9039108
	CA*F3131*6D*+EEP+TXV+HSK		23,000	17,000	13.0	11.0	800	9039107
	CA*F3636*6D*	A*VM970803BNA*	23,600	17,500	14.0	11.5	810	9039309
	CA*F3636*6D*	G*VC960603BNA*	23,600	17,500	14.0	11.5	815	9039328
	CA*F3636*6D*	G*VC960403BNA*	23,600	17,500	14.0	11.5	805	9039280
	CA*F3636*6D*	A*VC960603BNA*	23,600	17,500	14.0	11.5	815	9039266
	CA*F3636*6D*	A*VC960403BNA*	23,600	17,500	14.0	11.5	805	9039278
	CA*F3636*6D*	G*VM970603BNA*	23,600	17,500	14.0	11.5	815	9039288
	CA*F3636*6D*	G*VC960803BNA*	23,600	17,500	14.0	11.5	810	9039352
	CA*F3636*6D*	A*VM970603BNA*	23,600	17,500	14.0	11.5	815	9039279
	CA*F3636*6D*	A*VC960803BNA*	23,600	17,500	14.0	11.5	810	9039313
	CA*F3636*6D*	G*VM970803BNA*	23,600	17,500	14.0	11.5	810	9039273
	CA*F3636*6D*+EEP		23,000	17,000	13.0	11.0	800	9039111
	CA*F3636*6D*+EEP+TXV+HSK		23,000	17,000	13.0	11.0	800	9039104
	CA*F3636*6D*+TXV+HSK	G*VC960603BNA*	23,600	17,500	14.0	11.5	815	9039301
	CA*F3636*6D*+TXV+HSK	G*VC960403BNA*	23,600	17,500	14.0	11.5	805	9039293
	CA*F3636*6D*+TXV+HSK	A*VC960803BNA*	23,600	17,500	14.0	11.5	810	9039304
	CA*F3636*6D*+TXV+HSK	A*VM970603BNA*	23,600	17,500	14.0	11.5	815	9039261
	CA*F3636*6D*+TXV+HSK	G*VM970803BNA*	23,600	17,500	14.0	11.5	810	9039295
	CA*F3636*6D*+TXV+HSK	G*VC960803BNA*	23,600	17,500	14.0	11.5	810	9039323
	CA*F3636*6D*+TXV+HSK	A*VM970803BNA*	23,600	17,500	14.0	11.5	810	9039255
	CA*F3636*6D*+TXV+HSK	A*VC960403BNA*	23,600	17,500	14.0	11.5	805	9039339
	CA*F3636*6D*+TXV+HSK	A*VC960603BNA*	23,600	17,500	14.0	11.5	815	9039276
	CA*F3636*6D*+TXV+HSK	G*VM970603BNA*	23,600	17,500	14.0	11.5	815	9039336
	CA*F3743*6D*	G*VC960804CNA*	23,600	17,500	14.0	11.5	800	9039294
	CA*F3743*6D*	G*VM970804CNA*	23,600	17,500	14.0	11.5	800	9039329
	CA*F3743*6D*	A*VM970804CNA*	23,600	17,500	14.0	11.5	800	9039334
	CA*F3743*6D*	A*VC960804CNA*	23,600	17,500	14.0	11.5	800	9039326
	CA*F3743*6D*+TXV+HSK	A*VM970804CNA*	23,600	17,500	14.0	11.5	800	9039321
	CA*F3743*6D*+TXV+HSK	A*VC960804CNA*	23,600	17,500	14.0	11.5	800	9039327

See Notes on Page 51.

OUTDOOR UNIT	INDOOR UNITS		COOLING RATINGS				CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL ¹	SENS. ¹	SEER ²	EER ³		
ANX13 0241B* (Contd.)	CA*F3743*6D*+TXV+HSK	G*VC960804CNA*	23,600	17,500	14.0	11.5	800	9039272
	CA*F3743*6D*+TXV+HSK	G*VM970804CNA*	23,600	17,500	14.0	11.5	800	9039303
	CAPT3131*4A*+EEP+HSK		22,400	16,600	13.0	11.0	800	9039098
	CAPT3131*4A*+HSK	A*EC960303ANA*	23,000	17,000	13.5	11.5	800	10516371
	CAPT3131*4A*+HSK	A*EC960403ANA*	23,000	17,000	13.5	11.5	800	10516376
	CAPT3131*4A*+HSK	A*EC960603ANA*	23,000	17,000	13.5	11.5	775	10516368
	CAPT3131*4A*+HSK	A*EC960403BNA*	23,000	17,000	14.0	12.0	800	10338510
	CAPT3131*4A*+HSK	A*VM970603BNA*	23,000	17,000	14.0	11.5	815	9039205
	CAPT3131*4A*+HSK	G*VC960803BNA*	23,000	17,000	14.0	11.5	810	9039132
	CAPT3131*4A*+HSK	ADVC80603B*B*	23,000	17,000	14.0	11.5	800	9039223
	CAPT3131*4A*+HSK	A*VC960803BNA*	23,000	17,000	14.0	11.5	810	9039198
	CAPT3131*4A*+HSK	G*EC960803BNA*	23,000	17,000	14.0	11.5	775	9039219
	CAPT3131*4A*+HSK	A*EC960603BNA*	23,000	17,000	14.0	11.5	775	9039161
	CAPT3131*4A*+HSK	G*VM970803BNA*	23,000	17,000	14.0	11.5	810	9039124
	CAPT3131*4A*+HSK	A*VM970804CNA*	23,000	17,000	14.0	11.5	800	9039193
	CAPT3131*4A*+HSK	G*VC960603BNA*	23,000	17,000	14.0	11.5	815	9039123
	CAPT3131*4A*+HSK	A*EH800603B*A*	23,000	17,000	14.0	11.5	800	9039174
	CAPT3131*4A*+HSK	A*VC80604B*B*	23,000	17,000	14.0	11.5	830	9039194
	CAPT3131*4A*+HSK	G*VC960804CNA*	23,000	17,000	14.0	11.5	800	9039203
	CAPT3131*4A*+HSK	G*EC960402BNA*	23,000	17,000	14.0	11.5	775	9039186
	CAPT3131*4A*+HSK	A*EC960302BNA*	23,000	17,000	14.0	11.5	800	9039154
	CAPT3131*4A*+HSK	G*VC960403BNA*	23,000	17,000	14.0	11.5	805	9039160
	CAPT3131*4A*+HSK	A*VC960403BNA*	23,000	17,000	14.0	11.5	805	9039138
	CAPT3131*4A*+HSK	G*EC960302BNA*	23,000	17,000	14.0	11.5	800	9039222
	CAPT3131*4A*+HSK	G*VM970603BNA*	23,000	17,000	14.0	11.5	815	9039228
	CAPT3131*4A*+HSK	G*VM970804CNA*	23,000	17,000	14.0	11.5	800	9039235
	CAPT3131*4A*+HSK	G*EC960603BNA*	23,000	17,000	14.0	11.5	775	9039232
	CAPT3131*4A*+HSK	A*VC960804CNA*	23,000	17,000	14.0	11.5	800	9039149
	CAPT3131*4A*+HSK	G*E80603B*B*	23,000	17,000	14.0	11.5	800	9039170
	CAPT3131*4A*+HSK	A*VC960603BNA*	23,000	17,000	14.0	11.5	815	9039128
	CAPT3131*4A*+HSK	A*EC960803BNA*	23,000	17,000	14.0	11.5	775	9039220
	CAPT3131*4A*+HSK	A*EC960402BNA*	23,000	17,000	14.0	11.5	775	9039195
	CAPT3131*4A*+HSK	G*VC80604B*B*	23,000	17,000	14.0	11.5	830	9039146
	CAPT3131*4A*+HSK	A*VM970803BNA*	23,000	17,000	14.0	11.5	810	9039142
	CAPT3131*4A*+MBVC1200**--1A*+HSK		22,800	16,900	14.0	11.5	800	9039118
	CAPT3743*4A*+HSK	G*VC960804CNA*	23,600	17,500	14.0	11.5	800	9039342
	CAPT3743*4A*+HSK	G*VM970804CNA*	23,600	17,500	14.0	11.5	800	9039316
	CAPT3743*4A*+HSK	A*VC960804CNA*	23,600	17,500	14.0	11.5	800	9039296
	CAPT3743*4A*+HSK	A*VM970804CNA*	23,600	17,500	14.0	11.5	800	9039292
	CHPF1824A6C*+EEP		23,000	17,000	13.0	11.0	800	9039114
	CHPF2430B6C*	A*EC960303ANA*	23,000	17,000	13.5	11.5	800	10516372
	CHPF2430B6C*	A*EC960403ANA*	23,000	17,000	13.5	11.5	800	10516377
	CHPF2430B6C*	A*EC960603ANA*	23,000	17,000	13.5	11.5	775	10516379
	CHPF2430B6C*	A*EC960403BNA*	23,200	17,200	14.0	11.5	800	10338511
	CHPF2430B6C*	G*E80603B*B*	23,000	17,000	14.0	11.5	860	9039185
	CHPF2430B6C*	G*VC960603BNA*	23,200	17,200	14.0	11.5	815	9039285
	CHPF2430B6C*	A*VC960803BNA*	23,200	17,200	14.0	11.5	810	9039268
	CHPF2430B6C*	A*VM970603BNA*	23,200	17,200	14.0	11.5	815	9039274
	CHPF2430B6C*	A*VC960403BNA*	23,200	17,200	14.0	11.5	805	9039340

See Notes on Page 51.

OUTDOOR UNIT	INDOOR UNITS		COOLING RATINGS				CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL ¹	SENS. ¹	SEER ²	EER ³		
ANX13 0241B* (Contd.)	CHPF2430B6C*	G*EC960803BNA*	23,000	17,000	14.0	11.5	775	9039230
	CHPF2430B6C*	G*EC960402BNA*	23,000	17,000	14.0	11.5	775	9039213
	CHPF2430B6C*	G*VC960803BNA*	23,200	17,200	14.0	11.5	810	9039305
	CHPF2430B6C*	A*EC960803BNA*	23,000	17,000	14.0	11.5	775	9039190
	CHPF2430B6C*	A*EH800603B*A*	23,000	17,000	14.0	11.5	860	9039165
	CHPF2430B6C*	A*VC960603BNA*	23,200	17,200	14.0	11.5	815	9039289
	CHPF2430B6C*	A*EC960302BNA*	23,000	17,000	14.0	11.5	800	9039204
	CHPF2430B6C*	G*EC960603BNA*	23,000	17,000	14.0	11.5	775	9039209
	CHPF2430B6C*	G*VM970603BNA*	23,200	17,200	14.0	11.5	815	9039333
	CHPF2430B6C*	A*EC960603BNA*	23,000	17,000	14.0	11.5	775	9039201
	CHPF2430B6C*	G*VM970803BNA*	23,200	17,200	14.0	11.5	810	9039291
	CHPF2430B6C*	A*VM970803BNA*	23,200	17,200	14.0	11.5	810	9039306
	CHPF2430B6C*	A*EC960402BNA*	23,000	17,000	14.0	11.5	775	9039164
	CHPF2430B6C*	G*EC960302BNA*	23,000	17,000	14.0	11.5	800	9039150
	CHPF2430B6C*	G*VC960403BNA*	23,200	17,200	14.0	11.5	805	9039300
	CHPF2430B6C*+EEP		23,000	17,000	13.0	11.0	800	9039103
	CHPF2430B6C*+MBVC1200**--1A*		23,400	17,300	14.0	11.5	800	9039314
	CHPF2430B6C*+TXV+HSK	A*EC960303ANA*	23,000	17,000	14.0	11.5	800	10516373
	CHPF2430B6C*+TXV+HSK	A*EC960403ANA*	23,000	17,000	14.0	11.5	800	10516378
	CHPF2430B6C*+TXV+HSK	A*EC960603ANA*	23,000	17,000	14.0	11.5	775	10516380
	CHPF2430B6C*+TXV+HSK	A*EC960403BNA*	23,200	17,200	14.0	12.0	800	10338512
	CHPF2430B6C*+TXV+HSK	G*EC960402BNA*	23,000	17,000	14.0	11.5	775	9039135
	CHPF2430B6C*+TXV+HSK	A*EC960302BNA*	23,000	17,000	14.0	11.5	800	9039148
	CHPF2430B6C*+TXV+HSK	A*EC960402BNA*	23,000	17,000	14.0	11.5	775	9039137
	CHPF2430B6C*+TXV+HSK	G*EC960603BNA*	23,000	17,000	14.0	11.5	775	9039140
	CHPF2430B6C*+TXV+HSK	A*VM970803BNA*	23,200	17,200	14.0	11.5	810	9039318
	CHPF2430B6C*+TXV+HSK	G*EC960302BNA*	23,000	17,000	14.0	11.5	800	9039241
	CHPF2430B6C*+TXV+HSK	A*VC960403BNA*	23,200	17,200	14.0	11.5	805	9039250
	CHPF2430B6C*+TXV+HSK	G*VC960603BNA*	23,200	17,200	14.0	11.5	815	9039244
	CHPF2430B6C*+TXV+HSK	A*VC960803BNA*	23,200	17,200	14.0	11.5	810	9039245
	CHPF2430B6C*+TXV+HSK	G*VC960803BNA*	23,200	17,200	14.0	11.5	810	9039355
	CHPF2430B6C*+TXV+HSK	A*VM970603BNA*	23,200	17,200	14.0	11.5	815	9039262
	CHPF2430B6C*+TXV+HSK	G*VC960403BNA*	23,200	17,200	14.0	11.5	805	9039265
	CHPF2430B6C*+TXV+HSK	A*VC960603BNA*	23,200	17,200	14.0	11.5	815	9039320
	CHPF2430B6C*+TXV+HSK	G*VM970803BNA*	23,200	17,200	14.0	11.5	810	9039263
	CHPF2430B6C*+TXV+HSK	A*EC960803BNA*	23,000	17,000	14.0	11.5	775	9039179
	CHPF2430B6C*+TXV+HSK	A*EC960603BNA*	23,000	17,000	14.0	11.5	775	9039163
	CHPF2430B6C*+TXV+HSK	G*VM970603BNA*	23,200	17,200	14.0	11.5	815	9039324
	CHPF2430B6C*+TXV+HSK	G*EC960803BNA*	23,000	17,000	14.0	11.5	775	9039171
	CHPF3636B6C*	G*VC960403BNA*	23,400	17,300	14.0	11.5	805	9039247
	CHPF3636B6C*	A*VM970803BNA*	23,400	17,300	14.0	11.5	810	9039349
	CHPF3636B6C*	G*VC960803BNA*	23,400	17,300	14.0	11.5	810	9039258
	CHPF3636B6C*	G*VM970803BNA*	23,400	17,300	14.0	11.5	810	9039275
	CHPF3636B6C*	A*VC960803BNA*	23,400	17,300	14.0	11.5	810	9039246
	CHPF3636B6C*	A*VC960403BNA*	23,400	17,300	14.0	11.5	805	9039271
	CHPF3636B6C*	A*VM970603BNA*	23,400	17,300	14.0	11.5	815	9039253
	CHPF3636B6C*	G*VM970603BNA*	23,400	17,300	14.0	11.5	815	9039350
	CHPF3636B6C*	G*VC960603BNA*	23,400	17,300	14.0	11.5	815	9039341
	CHPF3636B6C*	A*VC960603BNA*	23,400	17,300	14.0	11.5	815	9039307

See Notes on Page 51.

OUTDOOR UNIT	INDOOR UNITS		COOLING RATINGS				CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL ¹	SENS. ¹	SEER ²	EER ³		
ANX13 0241B* (Contd.)	CHPF3636B6C*+TXV+HSK	G*VM970803BNA*	23,400	17,300	14.0	11.5	810	9039267
	CHPF3636B6C*+TXV+HSK	G*VC960803BNA*	23,400	17,300	14.0	11.5	810	9039345
	CHPF3636B6C*+TXV+HSK	G*VC960603BNA*	23,400	17,300	14.0	11.5	815	9039353
	CHPF3636B6C*+TXV+HSK	G*VC960403BNA*	23,400	17,300	14.0	11.5	805	9039325
	CHPF3636B6C*+TXV+HSK	A*VC960403BNA*	23,400	17,300	14.0	11.5	805	9039346
	CHPF3636B6C*+TXV+HSK	A*VC960603BNA*	23,400	17,300	14.0	11.5	815	9039249
	CHPF3636B6C*+TXV+HSK	G*VM970603BNA*	23,400	17,300	14.0	11.5	815	9039308
	CHPF3636B6C*+TXV+HSK	A*VM970603BNA*	23,400	17,300	14.0	11.5	815	9039312
	CHPF3636B6C*+TXV+HSK	A*VM970803BNA*	23,400	17,300	14.0	11.5	810	9039331
	CHPF3636B6C*+TXV+HSK	A*VC960803BNA*	23,400	17,300	14.0	11.5	810	9039251
	CHPF3642C6C*	G*VM970804CNA*	23,400	17,300	14.0	11.5	800	9039252
	CHPF3642C6C*	A*VM970804CNA*	23,400	17,300	14.0	11.5	800	9039322
	CHPF3642C6C*	A*VC960804CNA*	23,400	17,300	14.0	11.5	800	9039281
	CHPF3642C6C*	G*VC960804CNA*	23,400	17,300	14.0	11.5	800	9039335
	CHPF3642C6C*+TXV+HSK	G*VM970804CNA*	23,400	17,300	14.0	11.5	800	9039290
	CHPF3642C6C*+TXV+HSK	A*VC960804CNA*	23,400	17,300	14.0	11.5	800	9039317
	CHPF3642C6C*+TXV+HSK	A*VM970804CNA*	23,400	17,300	14.0	11.5	800	9039269
	CHPF3642C6C*+TXV+HSK	G*VC960804CNA*	23,400	17,300	14.0	11.5	800	9039311
	CSCF1824N6D*	A*VC960804CNA*	23,000	17,000	14.0	11.5	800	9039202
	CSCF1824N6D*	G*VC960803BNA*	23,000	17,000	14.0	11.5	810	9039237
	CSCF1824N6D*	A*VC960603BNA*	23,000	17,000	14.0	11.5	815	9039243
	CSCF1824N6D*	A*VM970603BNA*	23,000	17,000	14.0	11.5	815	9039127
	CSCF1824N6D*	A*VC960803BNA*	23,000	17,000	14.0	11.5	810	9039238
	CSCF1824N6D*	G*VM970803BNA*	23,000	17,000	14.0	11.5	810	9039225
	CSCF1824N6D*	G*VM970603BNA*	23,000	17,000	14.0	11.5	815	9039176
	CSCF1824N6D*	G*VM970804CNA*	23,000	17,000	14.0	11.5	800	9039187
	CSCF1824N6D*	G*VC960603BNA*	23,000	17,000	14.0	11.5	815	9039158
	CSCF1824N6D*	G*VC960403BNA*	23,000	17,000	14.0	11.5	805	9039215
	CSCF1824N6D*	A*VM970803BNA*	23,000	17,000	14.0	11.5	810	9039212
	CSCF1824N6D*	G*VC960804CNA*	23,000	17,000	14.0	11.5	800	9039240
	CSCF1824N6D*	A*VM970804CNA*	23,000	17,000	14.0	11.5	800	9039210
	CSCF1824N6D*	A*VC960403BNA*	23,000	17,000	14.0	11.5	805	9039211
	CSCF1824N6D*+EEP		23,000	17,000	13.0	11.0	800	9039101
	CSCF1824N6D*+TXV+HSK	A*VM970603BNA*	23,000	17,000	14.0	11.5	815	9039189
	CSCF1824N6D*+TXV+HSK	G*VC960804CNA*	23,000	17,000	14.0	11.5	800	9039227
	CSCF1824N6D*+TXV+HSK	G*VM970804CNA*	23,000	17,000	14.0	11.5	800	9039208
	CSCF1824N6D*+TXV+HSK	G*VC960603BNA*	23,000	17,000	14.0	11.5	815	9039119
	CSCF1824N6D*+TXV+HSK	A*VC960803BNA*	23,000	17,000	14.0	11.5	810	9039196
	CSCF1824N6D*+TXV+HSK	G*VC960803BNA*	23,000	17,000	14.0	11.5	810	9039200
	CSCF1824N6D*+TXV+HSK	A*VM970804CNA*	23,000	17,000	14.0	11.5	800	9039125
	CSCF1824N6D*+TXV+HSK	A*VM970803BNA*	23,000	17,000	14.0	11.5	810	9039120
	CSCF1824N6D*+TXV+HSK	A*VC960403BNA*	23,000	17,000	14.0	11.5	805	9039199
	CSCF1824N6D*+TXV+HSK	G*VM970803BNA*	23,000	17,000	14.0	11.5	810	9039178
	CSCF1824N6D*+TXV+HSK	G*VM970603BNA*	23,000	17,000	14.0	11.5	815	9039181
	CSCF1824N6D*+TXV+HSK	A*VC960603BNA*	23,000	17,000	14.0	11.5	815	9039153
	CSCF1824N6D*+TXV+HSK	G*VC960403BNA*	23,000	17,000	14.0	11.5	805	9039180
	CSCF1824N6D*+TXV+HSK	A*VC960804CNA*	23,000	17,000	14.0	11.5	800	9039121
	CSCF3036N6D*	A*VC960403BNA*	23,200	17,200	14.0	11.5	805	9039256
	CSCF3036N6D*	A*VM970603BNA*	23,200	17,200	14.0	11.5	815	9039354

See Notes on Page 51.

OUTDOOR UNIT	INDOOR UNITS		COOLING RATINGS				CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL ¹	SENS. ¹	SEER ²	EER ³		
	CSCF3036N6D*	G*VM970603BNA*	23,200	17,200	14.0	11.5	815	9039347
	CSCF3036N6D*	G*VM970804CNA*	23,200	17,200	14.0	11.5	800	9039297
	CSCF3036N6D*	G*VC960403BNA*	23,200	17,200	14.0	11.5	805	9039260
	CSCF3036N6D*	A*VC960803BNA*	23,200	17,200	14.0	11.5	810	9039283
	CSCF3036N6D*	A*VM970804CNA*	23,200	17,200	14.0	11.5	800	9039343
	CSCF3036N6D*	G*VC960803BNA*	23,200	17,200	14.0	11.5	810	9039264
	CSCF3036N6D*	G*VC960603BNA*	23,200	17,200	14.0	11.5	815	9039298
	CSCF3036N6D*	G*VC960804CNA*	23,200	17,200	14.0	11.5	800	9039302
	CSCF3036N6D*	G*VM970803BNA*	23,200	17,200	14.0	11.5	810	9039310
	CSCF3036N6D*	A*VM970803BNA*	23,200	17,200	14.0	11.5	810	9039315
	CSCF3036N6D*	A*VC960603BNA*	23,200	17,200	14.0	11.5	815	9039284
	CSCF3036N6D*	A*VC960804CNA*	23,200	17,200	14.0	11.5	800	9039248
	CSCF3036N6D*+TXV+HSK	A*VC960804CNA*	23,200	17,200	14.0	11.5	800	9039338
	CSCF3036N6D*+TXV+HSK	G*VC960603BNA*	23,200	17,200	14.0	11.5	815	9039270
	CSCF3036N6D*+TXV+HSK	G*VC960804CNA*	23,200	17,200	14.0	11.5	800	9039282
	CSCF3036N6D*+TXV+HSK	G*VM970603BNA*	23,200	17,200	14.0	11.5	815	9039344
	CSCF3036N6D*+TXV+HSK	G*VM970804CNA*	23,200	17,200	14.0	11.5	800	9039351
	CSCF3036N6D*+TXV+HSK	G*VC960403BNA*	23,200	17,200	14.0	11.5	805	9039287
	CSCF3036N6D*+TXV+HSK	A*VC960403BNA*	23,200	17,200	14.0	11.5	805	9039337
	CSCF3036N6D*+TXV+HSK	A*VC960603BNA*	23,200	17,200	14.0	11.5	815	9039330
	CSCF3036N6D*+TXV+HSK	A*VM970603BNA*	23,200	17,200	14.0	11.5	815	9039332
	CSCF3036N6D*+TXV+HSK	A*VM970803BNA*	23,200	17,200	14.0	11.5	810	9039319
	CSCF3036N6D*+TXV+HSK	A*VM970804CNA*	23,200	17,200	14.0	11.5	800	9039277
	CSCF3036N6D*+TXV+HSK	G*VM970803BNA*	23,200	17,200	14.0	11.5	810	9039257
	CSCF3036N6D*+TXV+HSK	A*VC960803BNA*	23,200	17,200	14.0	11.5	810	9039254
	CSCF3036N6D*+TXV+HSK	G*VC960803BNA*	23,200	17,200	14.0	11.5	810	9039259
ANX13 0301B*	ACNF30XX16D*		28,400	21,600	13.0	11.0	890	10259089
	ARUF29B14A*		28,600	21,800	13.0	11.0	1,020	10259090
	ASPT36C14A*+HSK		28,600	21,800	14.0	12.0	1,010	10259091
	ASPT37B14A*+HSK		28,800	21,900	14.0	12.0	945	10259092
	ASPT39C14B*+HSK		28,400	21,600	14.0	11.5	1,000	201834839
	AVPTC25B14A*+HSK		28,800	21,900	13.5	11.5	975	10259093
	AVPTC29B14A*+HSK		28,400	21,600	14.0	12.0	925	10259094
	AVPTC31C14A*+HSK		28,400	21,600	14.0	12.0	930	10259095
	AVPTC36C14A*+HSK		28,400	21,600	14.0	12.0	990	10259096
	AWUF30XX16B*		28,400	21,600	13.0	11.0	1,000	10259097
	AWUF36XX16B*		28,400	21,600	13.0	11.0	1,000	10259098
	AWUF37XX16B*		28,400	21,600	13.0	11.0	995	10259099
	CA*F3030*6D*	A*EC960303ANA*	28,000	21,800	13.5	11.5	975	10517491
	CA*F3030*6D*	A*EC960403ANA*	28,400	22,000	13.0	11.5	975	10517497
	CA*F3030*6D*	A*EC960403BNA*	28,400	22,000	13.5	11.5	1,000	10338513
	CA*F3030*6D*	A*EC960302BNA*	28,200	21,500	13.5	11.5	1,010	10259105
	CA*F3030*6D*	A*EC960402BNA*	28,000	21,300	13.5	11.5	1,010	10259112
	CA*F3030*6D*	A*EC960603BNA*	28,400	21,600	13.5	11.5	1,020	10259123
	CA*F3030*6D*	A*EC960803BNA*	28,400	21,600	13.5	11.5	995	10259134
	CA*F3030*6D*	A*VC80603B*B*	28,400	21,600	13.5	11.5	1,015	10259154
	CA*F3030*6D*	A*VC80604B*B*	28,400	21,600	13.5	11.3	995	10259155
	CA*F3030*6D*	A*VC80803B*B*	27,600	21,000	13.5	11.5	1,050	10259169
	CA*F3030*6D*	A*VC80804C*B*	28,400	21,600	13.5	11.3	1,035	10259171

See Notes on Page 51.

OUTDOOR UNIT	INDOOR UNITS		COOLING RATINGS				CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL ¹	SENS. ¹	SEER ²	EER ³		
ANX13 0301B* (Contd.)	CA*F3030*6D*	A*VC960403BNA*	27,000	20,600	14.0	11.5	1,000	10259175
	CA*F3030*6D*	A*VC960603BNA*	27,600	21,000	14.0	11.5	990	10259185
	CA*F3030*6D*	A*VC960803BNA*	28,000	21,300	14.0	11.5	1,015	10259195
	CA*F3030*6D*	A*VC960804CNA*	29,000	22,100	14.0	11.5	1,025	10259205
	CA*F3030*6D*	A*VM970603BNA*	28,000	21,300	14.0	11.5	995	10259215
	CA*F3030*6D*	A*VM970803BNA*	28,400	21,600	14.0	11.5	1,015	10259225
	CA*F3030*6D*	A*VM970804CNA*	29,000	22,100	14.0	11.5	1,025	10259235
	CA*F3030*6D*+EEP		28,000	21,300	13.0	11.0	1,050	10259070
	CA*F3030*6D*+TXV+HSK	A*EC960303ANA*	28,000	21,800	13.5	11.5	975	10517492
	CA*F3030*6D*+TXV+HSK	A*EC960403ANA*	28,200	22,000	13.5	11.5	975	10517498
	CA*F3030*6D*+TXV+HSK	A*EC960603ANA*	28,000	21,800	13.5	11.3	975	10517490
	CA*F3030*6D*+TXV+HSK	A*EC960403BNA*	28,400	22,000	13.5	11.5	1,000	10338514
	CA*F3030*6D*+TXV+HSK	A*EC960302BNA*	27,600	21,000	14.0	11.5	1,010	10259106
	CA*F3030*6D*+TXV+HSK	A*EC960402BNA*	27,800	21,200	14.0	11.5	1,010	10259113
	CA*F3030*6D*+TXV+HSK	A*EC960603BNA*	28,000	21,300	13.5	11.5	1,020	10259124
	CA*F3030*6D*+TXV+HSK	A*EC960803BNA*	28,400	21,600	13.5	11.5	995	10259135
	CA*F3030*6D*+TXV+HSK	A*VC80603B*B*	28,400	21,600	14.0	11.5	1,015	10259153
	CA*F3030*6D*+TXV+HSK	A*VC80803B*B*	28,400	21,600	14.0	11.5	1,050	10259168
	CA*F3030*6D*+TXV+HSK	A*VC960403BNA*	29,000	22,100	14.0	11.5	1,000	10259176
	CA*F3030*6D*+TXV+HSK	A*VC960603BNA*	29,000	22,100	14.0	11.5	990	10259186
	CA*F3030*6D*+TXV+HSK	A*VC960803BNA*	28,000	21,300	14.0	11.5	1,015	10259196
	CA*F3030*6D*+TXV+HSK	A*VC960804CNA*	28,400	21,600	14.0	11.5	1,025	10259206
	CA*F3030*6D*+TXV+HSK	A*VM970603BNA*	28,600	21,800	14.0	11.5	995	10259216
	CA*F3030*6D*+TXV+HSK	A*VM970803BNA*	28,600	21,800	14.0	11.5	1,015	10259226
	CA*F3030*6D*+TXV+HSK	A*VM970804CNA*	28,600	21,800	14.0	11.5	1,025	10259236
	CA*F3131*6D*	A*EC960303ANA*	28,200	22,000	13.5	11.5	975	10517493
	CA*F3131*6D*	A*EC960403ANA*	28,400	22,000	13.5	11.5	975	10517499
	CA*F3131*6D*	A*EC960403BNA*	28,400	22,000	13.5	11.5	1,000	10338515
	CA*F3131*6D*	A*EC960302BNA*	28,400	21,600	13.5	11.3	1,010	10259107
	CA*F3131*6D*	A*EC960402BNA*	28,400	21,600	13.5	11.3	1,010	10259114
	CA*F3131*6D*	A*EC960603BNA*	28,400	21,600	13.5	11.3	1,020	10259125
	CA*F3131*6D*	A*EC960803BNA*	28,400	21,600	13.5	11.3	995	10259136
	CA*F3131*6D*	A*VC80604B*B*	28,600	21,800	13.5	11.3	995	10259156
	CA*F3131*6D*+EEP		28,600	21,800	13.0	11.0	1,050	10259071
	CA*F3131*6D*+MBVC1200**--1A*		28,600	21,800	13.5	11.3	950	10259072
	CA*F3131*6D*+TXV+HSK	A*EC960303ANA*	28,000	21,800	13.5	11.5	975	10517494
	CA*F3131*6D*+TXV+HSK	A*EC960403ANA*	28,400	22,000	13.5	11.5	975	10517500
	CA*F3131*6D*+TXV+HSK	A*EC960603ANA*	28,200	22,000	13.5	11.3	975	10517505
	CA*F3131*6D*+TXV+HSK	A*EC960403BNA*	28,400	22,000	14.0	11.7	1,000	10338516
	CA*F3131*6D*+TXV+HSK	A*EC960302BNA*	28,600	21,800	14.0	11.5	1,010	10259108
	CA*F3131*6D*+TXV+HSK	A*EC960402BNA*	28,600	21,800	14.0	11.5	1,010	10259115
	CA*F3131*6D*+TXV+HSK	A*EC960603BNA*	28,600	21,800	13.5	11.5	1,020	10259126
	CA*F3131*6D*+TXV+HSK	A*EC960803BNA*	28,400	21,600	13.5	11.5	995	10259137
	CA*F3137*6A*	A*EC960403ANA*	28,600	22,200	13.5	11.5	975	10517501
	CA*F3137*6A*	A*EC960403BNA*	28,600	22,200	13.5	11.5	1,000	10338517
	CA*F3137*6A*	A*EC960402BNA*	28,400	21,600	13.5	11.5	1,010	10259116
	CA*F3137*6A*	A*EC960603BNA*	28,400	21,600	14.0	11.5	1,020	10259127
	CA*F3137*6A*	A*EC960803BNA*	28,400	21,600	13.5	11.5	995	10259138
	CA*F3137*6A*	A*VC80603B*B*	28,400	21,600	13.5	11.5	1,015	10259152

See Notes on Page 51.

OUTDOOR UNIT	INDOOR UNITS		COOLING RATINGS				CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL ¹	SENS. ¹	SEER ²	EER ³		
ANX13 0301B* (Contd.)	CA*F3137*6A*	A*VC80604B*B*	28,600	21,800	14.0	11.5	995	10259157
	CA*F3137*6A*	A*VC80803B*B*	28,600	21,800	13.5	11.5	1,050	10259167
	CA*F3137*6A*	A*VC960403BNA*	28,600	21,800	14.0	11.5	1,000	10259177
	CA*F3137*6A*	A*VC960603BNA*	28,600	21,800	14.0	11.5	990	10259187
	CA*F3137*6A*	A*VC960803BNA*	28,800	21,900	14.0	11.5	1,015	10259197
	CA*F3137*6A*	A*VM970603BNA*	28,800	21,900	14.0	11.5	995	10259217
	CA*F3137*6A*	A*VM970803BNA*	28,600	21,800	14.0	11.5	1,015	10259227
	CA*F3137*6A*+EEP		28,400	21,600	13.0	11.0	1,000	10259073
	CA*F3137*6A*+EEP+TXV+HSK		28,400	21,600	13.5	11.0	1,000	10259074
	CA*F3137*6A*+MBVC1200**-.1A*		28,400	21,600	14.0	11.5	1,015	10259075
	CA*F3137*6A*+MBVC1200**-.1A*+TXV+HSK		28,400	21,600	14.0	11.5	1,015	10259076
	CA*F3137*6A*+TXV+HSK	A*EC960403ANA*	28,600	22,200	14.0	11.5	975	10517502
	CA*F3137*6A*+TXV+HSK	A*EC960603ANA*	28,400	22,000	13.5	11.3	975	10517506
	CA*F3137*6A*+TXV+HSK	A*EC960403BNA*	28,600	22,200	14.0	11.7	1,000	10338518
	CA*F3137*6A*+TXV+HSK	A*EC960402BNA*	28,600	21,800	14.0	11.5	1,010	10259117
	CA*F3137*6A*+TXV+HSK	A*EC960603BNA*	28,600	21,800	14.0	11.5	1,020	10259128
	CA*F3137*6A*+TXV+HSK	A*EC960803BNA*	28,600	21,800	13.5	11.5	995	10259139
	CA*F3137*6A*+TXV+HSK	A*VC80603B*B*	28,600	21,800	14.0	11.5	1,015	10259151
	CA*F3137*6A*+TXV+HSK	A*VC80604B*B*	28,600	21,800	14.0	11.5	995	10259158
	CA*F3137*6A*+TXV+HSK	A*VC80803B*B*	28,600	21,800	14.0	11.5	1,050	10259166
	CA*F3137*6A*+TXV+HSK	A*VC960403BNA*	28,600	21,800	14.0	11.5	1,000	10259178
	CA*F3137*6A*+TXV+HSK	A*VC960603BNA*	28,400	21,600	14.0	11.5	990	10259188
	CA*F3137*6A*+TXV+HSK	A*VC960803BNA*	28,400	21,600	14.0	11.5	1,015	10259198
	CA*F3137*6A*+TXV+HSK	A*VM970603BNA*	28,400	21,600	14.0	11.5	995	10259218
	CA*F3137*6A*+TXV+HSK	A*VM970803BNA*	28,400	21,600	14.0	11.5	1,015	10259228
	CA*F3636*6D*+EEP		28,400	21,600	13.0	11.0	1,000	10259077
	CA*F3636*6D*+EEP+TXV+HSK		28,400	21,600	13.0	11.0	1,000	10259078
	CA*F3642*6D*+EEP		28,200	21,500	13.0	11.0	1,000	10259079
	CA*F3642*6D*+EEP+TXV+HSK		28,200	21,500	13.0	11.0	1,000	10259080
	CA*F3743*6D*	A*EC960402BNA*	28,600	21,800	13.5	11.3	1,010	10259118
	CA*F3743*6D*	A*EC960603BNA*	28,600	21,800	13.5	11.3	1,020	10259129
	CA*F3743*6D*	A*EC960803BNA*	28,200	21,500	13.5	11.3	995	10259140
	CA*F3743*6D*	A*VC960804CNA*	28,200	21,500	14.0	11.5	1,025	10259207
	CA*F3743*6D*	A*VM970804CNA*	28,200	21,500	14.0	11.5	1,025	10259237
	CA*F3743*6D*+EEP		28,200	21,500	13.5	11.0	1,000	10259081
	CA*F3743*6D*+EEP+TXV+HSK		28,600	21,800	13.5	11.0	1,000	10259082
	CA*F3743*6D*+TXV+HSK	A*EC960403BNA*	28,600	22,200	14.0	11.7	1,000	10338519
	CA*F3743*6D*+TXV+HSK	A*EC960402BNA*	28,600	21,800	14.0	11.5	1,010	10259119
	CA*F3743*6D*+TXV+HSK	A*EC960603BNA*	28,200	21,500	14.0	11.5	1,020	10259130
	CA*F3743*6D*+TXV+HSK	A*EC960803BNA*	28,400	21,600	14.0	11.5	995	10259141
	CA*F3743*6D*+TXV+HSK	A*VC960804CNA*	28,400	21,600	14.0	11.5	1,025	10259208
	CA*F3743*6D*+TXV+HSK	A*VM970804CNA*	28,400	21,600	14.0	11.5	1,025	10259238
	CAPT3131*4A*+HSK	A*VC80603B*B*	28,400	21,600	13.5	11.5	1,015	10259150
	CAPT3131*4A*+HSK	A*VC80803B*B*	28,400	21,600	13.5	11.5	1,050	10259165
	CAPT3131*4A*+HSK	A*VC960403BNA*	28,200	21,500	13.5	11.5	1,000	10259179
	CAPT3131*4A*+HSK	A*VC960603BNA*	28,600	21,800	14.0	11.5	990	10259189
	CAPT3131*4A*+HSK	A*VC960803BNA*	28,600	21,800	13.5	11.5	1,015	10259199
	CAPT3131*4A*+HSK	A*VC960804CNA*	28,200	21,500	13.5	11.5	1,025	10259209

See Notes on Page 51.

OUTDOOR UNIT	INDOOR UNITS		COOLING RATINGS				CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL ¹	SENS. ¹	SEER ²	EER ³		
ANX13 0301B* (Contd.)	CAPT3131*4A*+HSK	A*VM970603BNA*	28,200	21,500	14.0	11.5	995	10259219
	CAPT3131*4A*+HSK	A*VM970803BNA*	28,200	21,500	13.5	11.5	1,015	10259229
	CAPT3131*4A*+HSK	A*VM970804CNA*	28,200	21,500	13.5	11.5	1,025	10259239
	CAPT3743*4A*+EEP+HSK		28,400	21,600	13.0	11.0	1,000	10259083
	CAPT3743*4A*+HSK	A*EC960403BNA*	28,600	22,200	14.0	11.7	1,000	10338520
	CAPT3743*4A*+HSK	A*EC960302BNA*	28,400	21,600	13.5	11.5	990	10259109
	CAPT3743*4A*+HSK	A*EC960402BNA*	28,400	21,600	14.0	11.5	1,010	10259120
	CAPT3743*4A*+HSK	A*EC960603BNA*	28,400	21,600	14.0	11.5	1,010	10259131
	CAPT3743*4A*+HSK	A*EC960803BNA*	28,400	21,600	13.5	11.5	1,020	10259142
	CAPT3743*4A*+HSK	A*EH800603B*A*	28,600	21,800	13.5	11.5	995	10259100
	CAPT3743*4A*+HSK	A*VC80603B*B*	28,600	21,800	14.0	11.5	1,015	10259149
	CAPT3743*4A*+HSK	A*VC80604B*B*	28,000	21,300	14.0	12.0	995	10259159
	CAPT3743*4A*+HSK	A*VC80803B*B*	28,200	21,500	14.0	11.5	1,050	10259164
	CAPT3743*4A*+HSK	A*VC80804C*B*	28,400	21,600	14.0	12.0	1,035	10259170
	CAPT3743*4A*+HSK	A*VC80805C*B*	28,400	21,600	14.0	12.0	1,000	10259172
	CAPT3743*4A*+HSK	A*VC80805D*B*	28,400	21,600	14.0	12.0	1,000	10259173
	CAPT3743*4A*+HSK	A*VC81005C*B*	28,400	21,600	14.0	12.0	1,050	10259174
	CAPT3743*4A*+HSK	A*VC960403BNA*	28,400	21,600	14.0	11.5	1,000	10259180
	CAPT3743*4A*+HSK	A*VC960603BNA*	28,400	21,600	13.5	11.5	990	10259190
	CAPT3743*4A*+HSK	A*VC960803BNA*	28,600	21,800	14.0	11.5	1,015	10259200
	CAPT3743*4A*+HSK	A*VC960804CNA*	28,600	21,800	14.0	11.5	1,025	10259210
	CAPT3743*4A*+HSK	A*VM970603BNA*	28,400	21,600	13.5	11.5	995	10259220
	CAPT3743*4A*+HSK	A*VM970803BNA*	28,400	21,600	14.0	11.5	1,015	10259230
	CAPT3743*4A*+HSK	A*VM970804CNA*	28,400	21,600	14.0	11.5	1,025	10259240
	CAPT3743*4A*+MBVC1200**-1A*+HSK		28,400	21,600	14.0	11.5	950	10259084
	CAPT3743*4A*+MBVC1600**-1A*+HSK		28,400	21,600	14.0	11.5	1,020	10259085
	CHPF2430B6C*	A*EC960303ANA*	28,400	22,000	13.5	11.5	975	10517495
	CHPF2430B6C*	A*EC960403ANA*	28,400	22,000	13.5	11.5	975	10517503
	CHPF2430B6C*	A*EC960403BNA*	28,400	22,000	13.5	11.5	1,000	10338521
	CHPF2430B6C*	A*EC960302BNA*	28,400	21,600	13.5	11.3	990	10259110
	CHPF2430B6C*	A*EC960402BNA*	28,400	21,600	14.0	11.5	1,010	10259121
	CHPF2430B6C*	A*EH800603B*A*	28,400	21,600	14.0	11.5	1,010	10259101
	CHPF2430B6C*	A*VC80603B*B*	28,600	21,800	13.5	11.3	1,015	10259148
	CHPF2430B6C*	A*VC80803B*B*	28,600	21,800	13.5	11.3	1,050	10259163
	CHPF2430B6C*	A*VC960403BNA*	28,000	21,300	14.0	11.5	1,000	10259181
	CHPF2430B6C*	A*VC960603BNA*	28,200	21,500	14.0	11.5	990	10259191
	CHPF2430B6C*	A*VC960803BNA*	28,400	21,600	14.0	11.5	1,015	10259201
	CHPF2430B6C*	A*VM970603BNA*	28,400	21,600	14.0	11.5	995	10259221
	CHPF2430B6C*	A*VM970803BNA*	28,400	21,600	14.0	11.5	1,015	10259231
	CHPF2430B6C*+EEP		28,400	21,600	13.0	11.0	1,050	10259086
	CHPF2430B6C*+MBVC1200**-1A*		28,400	21,600	14.0	11.5	1,045	10259087
	CHPF2430B6C*+TXV+HSK	A*EC960303ANA*	28,400	22,000	14.0	11.5	975	10517496
	CHPF2430B6C*+TXV+HSK	A*EC960403ANA*	28,400	22,000	13.5	11.5	975	10517504
	CHPF2430B6C*+TXV+HSK	A*EC960403BNA*	28,400	22,000	14.0	11.7	1,000	10338522
	CHPF2430B6C*+TXV+HSK	A*EC960302BNA*	28,400	21,600	14.0	11.5	990	10259111
	CHPF2430B6C*+TXV+HSK	A*EC960402BNA*	28,600	21,800	14.0	11.5	1,010	10259122
	CHPF2430B6C*+TXV+HSK	A*EH800603B*A*	28,600	21,800	14.0	11.5	1,010	10259102
	CHPF2430B6C*+TXV+HSK	A*VC80603B*B*	28,000	21,300	14.0	11.5	1,015	10259147
	CHPF2430B6C*+TXV+HSK	A*VC80803B*B*	28,200	21,500	14.0	11.5	1,050	10259162

See Notes on Page 51.

OUTDOOR UNIT	INDOOR UNITS		COOLING RATINGS				CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL ¹	SENS. ¹	SEER ²	EER ³		
ANX13 0301B* (Contd.)	CHPF2430B6C*+TXV+HSK	A*VC960403BNA*	28,400	21,600	14.0	11.5	1,000	10259182
	CHPF2430B6C*+TXV+HSK	A*VC960603BNA*	28,400	21,600	14.0	11.5	990	10259192
	CHPF2430B6C*+TXV+HSK	A*VC960803BNA*	28,400	21,600	14.0	11.5	1,015	10259202
	CHPF2430B6C*+TXV+HSK	A*VM970603BNA*	28,600	21,800	14.0	11.5	995	10259222
	CHPF2430B6C*+TXV+HSK	A*VM970803BNA*	28,400	21,600	14.0	11.5	1,015	10259232
	CHPF3636B6C*	A*EC960603BNA*	28,400	21,600	13.5	11.5	1,020	10259132
	CHPF3636B6C*	A*EC960803BNA*	28,600	21,800	13.5	11.5	1,010	10259143
	CHPF3636B6C*+TXV+HSK	A*EC960603ANA*	28,400	22,000	13.5	11.3	975	10517507
	CHPF3636B6C*+TXV+HSK	A*EC960603BNA*	28,600	21,800	14.0	11.5	1,020	10259133
	CHPF3636B6C*+TXV+HSK	A*EC960803BNA*	28,400	21,600	14.0	11.5	1,010	10259144
	CHPF3642C6C*	A*VC960804CNA*	28,400	21,600	14.0	11.5	1,015	10259211
	CHPF3642C6C*	A*VM970804CNA*	28,400	21,600	14.0	11.5	1,015	10259241
	CHPF3642C6C*+TXV+HSK	A*VC960804CNA*	28,400	21,600	14.0	11.5	1,015	10259212
	CHPF3642C6C*+TXV+HSK	A*VM970804CNA*	28,400	21,600	14.0	11.5	1,015	10259242
	CHPF4860D6D*	A*EH800805C*A*	28,400	21,600	13.5	11.3	1,025	10259103
	CHPF4860D6D*+TXV+HSK	A*EH800805C*A*	28,400	21,600	14.0	11.5	1,025	10259104
	CSCF3036N6D*	A*VC80603B*B*	28,400	21,600	13.5	11.2	1,015	10259146
	CSCF3036N6D*	A*VC80803B*B*	28,600	21,800	13.5	11.2	1,050	10259161
	CSCF3036N6D*	A*VC960403BNA*	28,600	21,800	14.0	11.5	1,000	10259183
	CSCF3036N6D*	A*VC960603BNA*	28,000	21,300	14.0	11.3	990	10259193
	CSCF3036N6D*	A*VC960803BNA*	28,400	21,600	14.0	11.5	1,015	10259203
	CSCF3036N6D*	A*VC960804CNA*	28,400	21,600	14.0	11.5	1,025	10259213
	CSCF3036N6D*	A*VM970603BNA*	28,400	21,600	14.0	11.3	995	10259223
	CSCF3036N6D*	A*VM970803BNA*	28,400	21,600	14.0	11.5	1,015	10259233
	CSCF3036N6D*	A*VM970804CNA*	28,400	21,600	14.0	11.5	1,025	10259243
	CSCF3036N6D*+EEP		28,400	21,600	13.0	11.0	1,000	10259088
	CSCF3036N6D*+TXV+HSK	A*VC80603B*B*	28,400	21,600	13.5	11.2	1,015	10259145
	CSCF3036N6D*+TXV+HSK	A*VC80803B*B*	28,600	21,800	13.5	11.2	1,050	10259160
	CSCF3036N6D*+TXV+HSK	A*VC960403BNA*	28,600	21,800	14.0	11.5	1,000	10259184
	CSCF3036N6D*+TXV+HSK	A*VC960603BNA*	28,000	21,300	14.0	11.3	990	10259194
	CSCF3036N6D*+TXV+HSK	A*VC960803BNA*	28,400	21,600	14.0	11.5	1,015	10259204
	CSCF3036N6D*+TXV+HSK	A*VC960804CNA*	28,400	21,600	14.0	11.5	1,025	10259214
	CSCF3036N6D*+TXV+HSK	A*VM970603BNA*	28,400	21,600	14.0	11.3	995	10259224
	CSCF3036N6D*+TXV+HSK	A*VM970803BNA*	28,400	21,600	14.0	11.5	1,015	10259234
	CSCF3036N6D*+TXV+HSK	A*VM970804CNA*	28,400	21,600	14.0	11.5	1,025	10259244
ANX13 0361A*	ARUF36C14B*+TXV		34,000	26,400	13.0	11.0	1,165	6688151
	ARUF37C14A*		34,000	26,400	13.0	11.0	1,050	7988976
	ARUF42C14A*+TXV		34,200	26,600	13.0	11.0	1,150	6688153
	ASPT36C14A*		34,000	26,400	13.8	11.8	1,210	6688154
	ASPT37C14A*		34,200	26,600	14.0	12.0	1,120	8245673
	ASPT39C14B*		34,400	26,800	13.5	11.5	1,220	201834840
	AVPTC36C14A*		34,000	26,400	13.8	11.8	1,215	6688158
	AVPTC37B14A*		34,600	27,000	13.5	11.5	1,080	8996509
	AVPTC37C14A*		35,000	27,200	14.0	12.0	1,130	8996510
	AVPTC37D14A*		35,400	27,600	14.0	12.0	1,145	8996511
	AVPTC42D14A*		34,600	27,000	14.0	12.0	1,225	6688159
	AVPTC48C14A*		34,000	26,400	14.0	12.0	1,100	7080457
	AWUF36XX16B*		33,400	26,000	13.0	11.0	1,150	6688160
	AWUF37XX16B*		33,600	26,200	13.0	11.0	1,150	6688161

See Notes on Page 51.

OUTDOOR UNIT	INDOOR UNITS		COOLING RATINGS				CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL ¹	SENS. ¹	SEER ²	EER ³		
ANX13 0361A* (Contd.)	CA*F3137*6A*	G*EC960603BNA*	34,000	26,400	13.5	11.0	1,090	7489595
	CA*F3137*6A*	G*VM970603BNA*	34,000	26,400	13.5	11.0	1,055	7489601
	CA*F3137*6A*	G*VC960403BNA*	34,000	26,400	13.5	11.0	1,050	7489598
	CA*F3137*6A*	G*VC960603BNA*	34,000	26,400	13.5	11.0	1,055	7489599
	CA*F3137*6A*	A*EC960803BNA*	34,000	26,400	13.5	11.0	1,090	7489585
	CA*F3137*6A*	G*VM970803BNA*	34,000	26,400	13.5	11.0	1,100	7489602
	CA*F3137*6A*	G*VC960803BNA*	34,000	26,400	13.5	11.0	1,100	7489600
	CA*F3137*6A*	A*VM970803BNA*	34,000	26,400	13.5	11.0	1,100	7489592
	CA*F3137*6A*	A*EH800603B*A*	34,000	26,400	14.0	11.5	1,100	7489586
	CA*F3137*6A*	A*EC960603BNA*	34,000	26,400	13.5	11.0	1,090	7489584
	CA*F3137*6A*	G*VC80604B*B*	34,000	26,400	14.0	11.5	1,095	7489597
	CA*F3137*6A*	A*VC960603BNA*	34,000	26,400	13.5	11.0	1,055	7489589
	CA*F3137*6A*	A*VC960403BNA*	34,000	26,400	13.5	11.0	1,050	7489588
	CA*F3137*6A*	A*VC960803BNA*	34,000	26,400	13.5	11.0	1,100	7489590
	CA*F3137*6A*	G*E80603B*B*	34,000	26,400	14.0	11.5	1,100	7489594
	CA*F3137*6A*	G*EC960803BNA*	34,000	26,400	13.5	11.0	1,090	7489596
	CA*F3137*6A*	ADVC80603B*B*	34,000	26,400	13.5	11.0	1,075	7489593
	CA*F3137*6A*	A*VM970603BNA*	34,000	26,400	13.5	11.0	1,055	7489591
	CA*F3137*6A*	A*VC80604B*B*	34,000	26,400	14.0	11.5	1,095	7489587
	CA*F3137*6A*+EEP		34,000	26,400	13.0	11.0	1,200	7489561
	CA*F3137*6A*+EEP+TXV		34,000	26,400	13.5	11.0	1,200	7489562
	CA*F3137*6A*+MBVC1200**-1A*		34,000	26,400	14.0	11.5	1,050	7489563
	CA*F3137*6A*+MBVC1200**-1A*+TXV		34,000	26,400	14.0	11.5	1,050	7489564
	CA*F3137*6A*+TXV	G*VM970603BNA*	34,000	26,400	14.0	11.5	1,055	7489582
	CA*F3137*6A*+TXV	ADVC80603B*B*	34,000	26,400	14.0	11.5	1,075	7489574
	CA*F3137*6A*+TXV	A*EC960803BNA*	34,000	26,400	13.5	11.0	1,090	7489566
	CA*F3137*6A*+TXV	A*VM970603BNA*	34,000	26,400	14.0	11.5	1,055	7489572
	CA*F3137*6A*+TXV	G*VC960803BNA*	34,000	26,400	14.0	11.5	1,100	7489581
	CA*F3137*6A*+TXV	A*EH800603B*A*	34,000	26,400	14.0	11.5	1,100	7489567
	CA*F3137*6A*+TXV	G*VC80604B*B*	34,000	26,400	14.0	11.5	1,095	7489578
	CA*F3137*6A*+TXV	G*VC960403BNA*	34,000	26,400	14.0	11.5	1,050	7489579
	CA*F3137*6A*+TXV	G*EC960803BNA*	34,000	26,400	13.5	11.0	1,090	7489577
	CA*F3137*6A*+TXV	G*VM970803BNA*	34,000	26,400	14.0	11.5	1,100	7489583
	CA*F3137*6A*+TXV	A*VM970803BNA*	34,000	26,400	14.0	11.5	1,100	7489573
	CA*F3137*6A*+TXV	G*E80603B*B*	34,000	26,400	14.0	11.5	1,100	7489575
	CA*F3137*6A*+TXV	A*VC960603BNA*	34,000	26,400	14.0	11.5	1,055	7489570
	CA*F3137*6A*+TXV	A*EC960603BNA*	34,000	26,400	13.5	11.0	1,090	7489565
	CA*F3137*6A*+TXV	A*VC960803BNA*	34,000	26,400	14.0	11.5	1,100	7489571
	CA*F3137*6A*+TXV	G*VC960603BNA*	34,000	26,400	14.0	11.5	1,055	7489580
	CA*F3137*6A*+TXV	G*EC960603BNA*	34,000	26,400	13.5	11.0	1,090	7489576
	CA*F3137*6A*+TXV	A*VC80604B*B*	34,000	26,400	14.0	11.5	1,095	7489568
	CA*F3137*6A*+TXV	A*VC960403BNA*	34,000	26,400	14.0	11.5	1,050	7489569
	CA*F3636*6D*+EEP		33,600	26,200	13.0	11.0	1,200	6688175
	CA*F3642*6D*+EEP		33,600	26,200	13.0	11.0	1,200	6688189
	CA*F3642*6D*+MBVC1600**-1A*		34,000	26,400	14.0	11.5	1,200	6688190
	CA*F3743*6D*	G*VC960804CNA*	34,000	26,400	13.0	11.0	1,115	7359445
	CA*F3743*6D*	A*VM971005CNA*	34,000	26,400	13.5	11.3	1,175	7359443
	CA*F3743*6D*	G*EC961004CNA*	33,600	26,200	13.5	11.5	1,100	7366884
	CA*F3743*6D*	G*VC961205DNA*	34,000	26,400	13.5	11.3	1,150	7359447

See Notes on Page 51.

OUTDOOR UNIT	INDOOR UNITS		COOLING RATINGS				CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL ¹	SENS. ¹	SEER ²	EER ³		
ANX13 0361A* (Contd.)	CA*F3743*6D*	A*VM971205DNA*	34,000	26,400	13.5	11.3	1,150	7359444
	CA*F3743*6D*	G*VM971005CNA*	34,000	26,400	13.5	11.3	1,175	7359449
	CA*F3743*6D*	G*VC961005CNA*	34,000	26,400	13.5	11.3	1,175	7359446
	CA*F3743*6D*	A*VC960804CNA*	34,000	26,400	13.0	11.0	1,115	7359439
	CA*F3743*6D*	G*VM970804CNA*	34,000	26,400	13.0	11.0	1,115	7359448
	CA*F3743*6D*	A*VC961205DNA*	34,000	26,400	13.5	11.3	1,150	7359441
	CA*F3743*6D*	A*VC961005CNA*	34,000	26,400	13.5	11.3	1,175	7359440
	CA*F3743*6D*	A*VM970804CNA*	34,000	26,400	13.0	11.0	1,115	7359442
	CA*F3743*6D*	A*EC961004CNA*	33,600	26,200	13.5	11.5	1,100	7366990
	CA*F3743*6D*	G*VM971205DNA*	34,000	26,400	13.5	11.3	1,150	7359450
	CA*F3743*6D*+EEP		34,200	26,600	13.0	11.0	1,200	6688204
	CA*F3743*6D*+EEP+TXV		34,200	26,600	13.5	11.0	1,200	6688205
	CA*F3743*6D*+MBVC1600*-1A*		34,000	26,400	14.0	11.5	1,210	6688206
	CA*F3743*6D*+TXV	G*VC961005CNA*	34,000	26,400	13.5	11.3	1,175	7359458
	CA*F3743*6D*+TXV	A*EC960603BNA*	33,600	26,200	13.5	11.0	1,175	7366986
	CA*F3743*6D*+TXV	A*EC960803BNA*	33,400	26,000	13.5	11.0	1,075	7366988
	CA*F3743*6D*+TXV	G*VM970804CNA*	34,000	26,400	13.5	11.3	1,115	7359460
	CA*F3743*6D*+TXV	G*VM971005CNA*	34,000	26,400	13.5	11.3	1,175	7359461
	CA*F3743*6D*+TXV	A*EC961004CNA*	33,600	26,200	14.0	11.5	1,100	7366991
	CA*F3743*6D*+TXV	G*VM971205DNA*	34,000	26,400	13.5	11.3	1,150	7359462
	CA*F3743*6D*+TXV	A*VC961205DNA*	34,000	26,400	13.5	11.3	1,150	7359453
	CA*F3743*6D*+TXV	A*VM971005CNA*	34,000	26,400	13.5	11.3	1,175	7359455
	CA*F3743*6D*+TXV	A*VM970804CNA*	34,000	26,400	13.5	11.3	1,115	7359454
	CA*F3743*6D*+TXV	G*VC961205DNA*	34,000	26,400	13.5	11.3	1,150	7359459
	CA*F3743*6D*+TXV	G*EC960603BNA*	33,600	26,200	13.5	11.0	1,175	7366880
	CA*F3743*6D*+TXV	A*VC960804CNA*	34,000	26,400	13.5	11.3	1,115	7359451
	CA*F3743*6D*+TXV	G*EC960803BNA*	33,400	26,000	13.5	11.0	1,075	7366882
	CA*F3743*6D*+TXV	A*VM971205DNA*	34,000	26,400	13.5	11.3	1,150	7359456
	CA*F3743*6D*+TXV	G*VC960804CNA*	34,000	26,400	13.5	11.3	1,115	7359457
	CA*F3743*6D*+TXV	G*EC961004CNA*	33,600	26,200	14.0	11.5	1,100	7366885
	CA*F3743*6D*+TXV	A*VC961005CNA*	34,000	26,400	13.5	11.3	1,175	7359452
	CAPT3743*4A*	A*VC961005CNA*	34,000	26,400	13.0	11.0	1,175	7359464
	CAPT3743*4A*	A*VC961205DNA*	34,000	26,400	13.5	11.3	1,150	7359465
	CAPT3743*4A*	G*E80603B*B*	34,000	26,400	13.0	11.0	1,150	6688225
	CAPT3743*4A*	G*VC960804CNA*	34,000	26,400	13.0	11.0	1,115	7359469
	CAPT3743*4A*	G*VC80604B*B*	34,000	26,400	13.5	11.5	1,220	6688228
	CAPT3743*4A*	G*VC961005CNA*	34,000	26,400	13.0	11.0	1,175	7359470
	CAPT3743*4A*	ADVC80603B*B*	34,000	26,400	13.5	11.5	1,165	6688222
	CAPT3743*4A*	A*VM971005CNA*	34,000	26,400	13.0	11.0	1,175	7359467
	CAPT3743*4A*	A*VC80604B*B*	34,000	26,400	13.5	11.5	1,220	6688207
	CAPT3743*4A*	G*EC961004CNA*	33,600	26,200	13.5	11.3	1,100	7366886
	CAPT3743*4A*	A*VC80805C*B*	34,000	26,400	13.5	11.5	1,190	6688208
	CAPT3743*4A*	A*VC81005C*B*	34,000	26,400	13.5	11.5	1,210	6688209
	CAPT3743*4A*	G*VM970804CNA*	34,000	26,400	13.0	11.0	1,115	7359472
	CAPT3743*4A*	G*VM971205DNA*	34,000	26,400	13.5	11.3	1,150	7359474
	CAPT3743*4A*	A*EH800805C*A*	34,000	26,400	13.5	11.5	1,210	6946168
	CAPT3743*4A*	G*VC81005C*B*	34,000	26,400	13.5	11.5	1,210	6688230
	CAPT3743*4A*	ADVC81005C*B*	34,000	26,400	13.5	11.5	1,235	6688224
	CAPT3743*4A*	G*E81005C*B*	34,000	26,400	13.5	11.5	1,230	6688227

See Notes on Page 51.

OUTDOOR UNIT	INDOOR UNITS		COOLING RATINGS				CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL ¹	SENS. ¹	SEER ²	EER ³		
ANX13 0361A* (Contd.)	CAPT3743*4A*	ADVC80805C*B*	34,000	26,400	13.5	11.5	1,190	6688223
	CAPT3743*4A*	G*VC961205DNA*	34,000	26,400	13.5	11.3	1,150	7359471
	CAPT3743*4A*	G*E80805C*B*	34,000	26,400	13.5	11.5	1,210	6688226
	CAPT3743*4A*	A*EH800603B*A*	34,000	26,400	13.0	11.0	1,150	6946167
	CAPT3743*4A*	A*VM970804CNA*	34,000	26,400	13.0	11.0	1,115	7359466
	CAPT3743*4A*	A*EC961004CNA*	33,600	26,200	13.5	11.3	1,100	7366992
	CAPT3743*4A*	G*VM971005CNA*	34,000	26,400	13.0	11.0	1,175	7359473
	CAPT3743*4A*	G*VC80805C*B*	34,000	26,400	13.5	11.5	1,190	6688229
	CAPT3743*4A*	A*VM971205DNA*	34,000	26,400	13.5	11.3	1,150	7359468
	CAPT3743*4A*	A*EH801005C*A*	34,000	26,400	13.5	11.5	1,230	6946169
	CAPT3743*4A*	A*VC960804CNA*	34,000	26,400	13.0	11.0	1,115	7359463
	CAPT3743*4A*+EEP		34,000	26,400	13.0	11.0	1,200	6688247
	CAPT3743*4A*+MBVC1200**-1A*		34,000	26,400	13.0	11.5	1,200	6688248
	CAPT3743*4A*+MBVC1600**-1A*		34,000	26,400	14.0	11.5	1,205	6688249
	CAPT3743*4A*+MBVC2000**-1A*		34,000	26,400	14.0	11.5	1,205	6688250
	CHPF3636B6C*+EEP		33,000	26,400	13.0	11.0	1,000	6688251
	CHPF3642C6C*	G*VC961005CNA*	34,000	26,400	13.5	11.3	1,175	7359480
	CHPF3642C6C*	A*VC961005CNA*	34,000	26,400	13.5	11.3	1,175	7359476
	CHPF3642C6C*	A*VM971005CNA*	34,000	26,400	13.5	11.3	1,175	7359478
	CHPF3642C6C*	A*VM970804CNA*	33,800	26,400	13.0	11.0	1,115	7359477
	CHPF3642C6C*	G*VM970804CNA*	33,800	26,400	13.0	11.0	1,115	7359481
	CHPF3642C6C*	A*VC960804CNA*	33,800	26,400	13.0	11.0	1,115	7359475
	CHPF3642C6C*	G*VC960804CNA*	33,800	26,400	13.0	11.0	1,115	7359479
	CHPF3642C6C*	G*VM971005CNA*	34,000	26,400	13.5	11.3	1,175	7359482
	CHPF3642C6C*+EEP		33,000	26,400	13.0	11.0	1,075	6688252
	CHPF3642C6C*+MBVC1600**-1A*		34,000	26,400	14.0	11.5	1,210	6688253
	CHPF3642C6C*+TXV	A*VC960804CNA*	33,800	26,400	13.5	11.3	1,115	7359483
	CHPF3642C6C*+TXV	A*VM971005CNA*	34,000	26,400	13.5	11.3	1,175	7359486
	CHPF3642C6C*+TXV	G*VM970804CNA*	33,800	26,400	13.5	11.3	1,115	7359489
	CHPF3642C6C*+TXV	G*VC961005CNA*	34,000	26,400	13.5	11.3	1,175	7359488
	CHPF3642C6C*+TXV	A*VC961005CNA*	34,000	26,400	13.5	11.3	1,175	7359484
	CHPF3642C6C*+TXV	G*VM971005CNA*	34,000	26,400	13.5	11.3	1,175	7359490
	CHPF3642C6C*+TXV	G*VC960804CNA*	33,800	26,400	13.5	11.3	1,115	7359487
	CHPF3642C6C*+TXV	A*VM970804CNA*	33,800	26,400	13.5	11.3	1,115	7359485
	CHPF3642D6C*	G*VM971205DNA*	34,000	26,400	13.5	11.3	1,150	7359494
	CHPF3642D6C*	A*VM971205DNA*	34,000	26,400	13.5	11.3	1,150	7359492
	CHPF3642D6C*	A*VC961205DNA*	34,000	26,400	13.5	11.3	1,150	7359491
	CHPF3642D6C*	G*VC961205DNA*	34,000	26,400	13.5	11.3	1,150	7359493
	CHPF3642D6C*+EEP		34,000	26,400	13.0	11.0	1,200	6688263
	CHPF3642D6C*+TXV	A*VC961205DNA*	34,000	26,400	13.5	11.3	1,150	7359495
	CHPF3642D6C*+TXV	A*VM971205DNA*	34,000	26,400	13.5	11.3	1,150	7359496
	CHPF3642D6C*+TXV	G*VM971205DNA*	34,000	26,400	13.5	11.3	1,150	7359498
	CHPF3642D6C*+TXV	G*VC961205DNA*	34,000	26,400	13.5	11.3	1,150	7359497
	CHPF3743C6B*	A*EC961004CNA*	33,600	26,200	13.5	11.3	1,100	7366993
	CHPF3743C6B*	G*EC961004CNA*	33,600	26,200	13.5	11.3	1,100	7366887
	CHPF3743C6B*+TXV	G*EC961004CNA*	33,600	26,200	14.0	11.5	1,100	7366888
	CHPF3743C6B*+TXV	A*EC960803BNA*	33,400	26,000	13.5	11.0	1,075	7366989
	CHPF3743C6B*+TXV	G*EC960803BNA*	33,400	26,000	13.5	11.0	1,075	7366883
	CHPF3743C6B*+TXV	A*EC961004CNA*	33,600	26,200	14.0	11.5	1,100	7366994

See Notes on Page 51.

OUTDOOR UNIT	INDOOR UNITS		COOLING RATINGS				CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL ¹	SENS. ¹	SEER ²	EER ³		
ANX13 0361A* (Contd.)	CHPF3743C6B*+TXV	A*EC960603BNA*	33,600	26,200	13.5	11.0	1,175	7366987
	CHPF3743C6B*+TXV	G*EC960603BNA*	33,600	26,200	13.5	11.0	1,175	7366881
	CSCF3642N6D*	G*VC961005CNA*	33,800	26,400	13.5	11.3	1,175	7359506
	CSCF3642N6D*	G*VM971205DNA*	33,600	26,200	13.5	11.3	1,150	7359510
	CSCF3642N6D*	G*VC961205DNA*	33,600	26,200	13.5	11.3	1,150	7359507
	CSCF3642N6D*	A*VM971205DNA*	33,600	26,200	13.5	11.3	1,150	7359504
	CSCF3642N6D*	G*VM970804CNA*	33,600	26,200	13.0	11.0	1,115	7359508
	CSCF3642N6D*	A*VC960804CNA*	33,600	26,200	13.0	11.0	1,115	7359499
	CSCF3642N6D*	A*VC961005CNA*	33,800	26,400	13.5	11.3	1,175	7359500
	CSCF3642N6D*	A*VM970804CNA*	33,600	26,200	13.0	11.0	1,115	7359502
	CSCF3642N6D*	A*VM971005CNA*	33,800	26,400	13.5	11.3	1,175	7359503
	CSCF3642N6D*	G*VM971005CNA*	33,800	26,400	13.5	11.3	1,175	7359509
	CSCF3642N6D*	G*VC960804CNA*	33,600	26,200	13.0	11.0	1,115	7359505
	CSCF3642N6D*	A*VC961205DNA*	33,600	26,200	13.5	11.3	1,150	7359501
	CSCF3642N6D*+TXV	A*VC961205DNA*	33,600	26,200	13.5	11.3	1,150	7359513
	CSCF3642N6D*+TXV	G*VM970804CNA*	33,600	26,200	13.0	11.0	1,115	7359520
	CSCF3642N6D*+TXV	G*VM971205DNA*	33,600	26,200	13.5	11.3	1,150	7359522
	CSCF3642N6D*+TXV	A*VM971205DNA*	33,600	26,200	13.5	11.3	1,150	7359516
	CSCF3642N6D*+TXV	G*VM971005CNA*	33,800	26,400	13.5	11.3	1,175	7359521
	CSCF3642N6D*+TXV	A*VC961005CNA*	33,800	26,400	13.5	11.3	1,175	7359512
	CSCF3642N6D*+TXV	G*VC961005CNA*	33,800	26,400	13.5	11.3	1,175	7359518
	CSCF3642N6D*+TXV	G*VC961205DNA*	33,600	26,200	13.5	11.3	1,150	7359519
	CSCF3642N6D*+TXV	A*VM971005CNA*	33,800	26,400	13.5	11.3	1,175	7359515
	CSCF3642N6D*+TXV	A*VC960804CNA*	33,600	26,200	13.0	11.0	1,115	7359511
	CSCF3642N6D*+TXV	G*VC960804CNA*	33,600	26,200	13.0	11.0	1,115	7359517
	CSCF3642N6D*+TXV	A*VM970804CNA*	33,600	26,200	13.0	11.0	1,115	7359514
ANX13 0421A*	ARUF42C14A*+TXV		39,500	30,200	13.0	11.0	1,280	6688267
	ARUF43C14A*		40,500	31,000	13.0	11.0	1,345	7988977
	ARUF43D14A*		40,500	31,000	13.0	11.0	1,270	8171734
	ASPT47D14A*		40,000	30,600	14.0	12.0	1,200	8245674
	ASPT49D14A*		40,500	31,000	14.0	12.0	1,290	8245675
	AVPTC42D14A*		40,500	31,000	14.0	12.0	1,495	6688274
	AVPTC48C14A*		39,500	30,200	13.5	11.5	1,300	7080469
	AVPTC49D14A*		41,000	31,400	14.0	12.0	1,320	8996514
	AVPTC59C14A*		40,000	30,600	14.0	12.0	1,290	8996512
	AVPTC59D14A*		40,500	31,000	14.0	12.0	1,365	8996513
	CA*F3642*6D*	G*E80805C*B*	40,000	30,600	13.0	11.3	1,350	6688275
	CA*F3642*6D*	A*EH800805C*A*	40,000	30,600	13.0	11.3	1,350	6946174
	CA*F3642*6D*+EEP		40,000	30,600	13.0	11.0	1,400	6688276
	CA*F3642*6D*+EEP+TXV		40,000	30,600	13.0	11.0	1,400	6688277
	CA*F3743*6D*	G*VM971005CNA*	40,500	31,000	14.0	11.5	1,300	7359533
	CA*F3743*6D*	A*VC960804CNA*	40,500	31,000	14.0	11.5	1,300	7359523
	CA*F3743*6D*	A*VM970804CNA*	40,500	31,000	14.0	11.5	1,300	7359526
	CA*F3743*6D*	A*VC961005CNA*	40,500	31,000	14.0	11.5	1,300	7359524
	CA*F3743*6D*	G*VM971205DNA*	40,000	30,600	14.0	11.5	1,250	7359534
	CA*F3743*6D*	A*VC961205DNA*	40,000	30,600	14.0	11.5	1,250	7359525
	CA*F3743*6D*	A*VM971005CNA*	40,500	31,000	14.0	11.5	1,300	7359527
	CA*F3743*6D*	G*E80805C*B*	40,000	30,600	13.0	11.3	1,350	6688278
	CA*F3743*6D*	G*VC961205DNA*	40,000	30,600	14.0	11.5	1,250	7359531

See Notes on Page 51.

OUTDOOR UNIT	INDOOR UNITS		COOLING RATINGS				CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL ¹	SENS. ¹	SEER ²	EER ³		
ANX13 0421A* (Contd.)	CA*F3743*6D*	G*VC960804CNA*	40,500	31,000	14.0	11.5	1,300	7359529
	CA*F3743*6D*	A*EH800805C*A*	40,000	30,600	13.0	11.3	1,350	6946175
	CA*F3743*6D*	A*VM971205DNA*	40,000	30,600	14.0	11.5	1,250	7359528
	CA*F3743*6D*	G*VC961005CNA*	40,500	31,000	14.0	11.5	1,300	7359530
	CA*F3743*6D*	G*VM970804CNA*	40,500	31,000	14.0	11.5	1,300	7359532
	CA*F3743*6D*+EEP		40,000	30,600	13.0	11.0	1,400	6688279
	CA*F3743*6D*+TXV	G*VC960804CNA*	40,500	31,000	14.0	11.5	1,300	7359541
	CA*F3743*6D*+TXV	G*VM970804CNA*	40,500	31,000	14.0	11.5	1,300	7359544
	CA*F3743*6D*+TXV	A*VC961205DNA*	40,000	30,600	14.0	11.5	1,250	7359537
	CA*F3743*6D*+TXV	A*VM970804CNA*	40,500	31,000	14.0	11.5	1,300	7359538
	CA*F3743*6D*+TXV	A*VM971005CNA*	40,500	31,000	14.0	11.5	1,300	7359539
	CA*F3743*6D*+TXV	A*VC961005CNA*	40,500	31,000	14.0	11.5	1,300	7359536
	CA*F3743*6D*+TXV	G*VC961205DNA*	40,000	30,600	14.0	11.5	1,250	7359543
	CA*F3743*6D*+TXV	G*VM971205DNA*	40,000	30,600	14.0	11.5	1,250	7359546
	CA*F3743*6D*+TXV	A*VC960804CNA*	40,500	31,000	14.0	11.5	1,300	7359535
	CA*F3743*6D*+TXV	G*VC961005CNA*	40,500	31,000	14.0	11.5	1,300	7359542
	CA*F3743*6D*+TXV	G*VM971005CNA*	40,500	31,000	14.0	11.5	1,300	7359545
	CA*F3743*6D*+TXV	A*VM971205DNA*	40,000	30,600	14.0	11.5	1,250	7359540
	CA*F4860*6D*	A*EH800805C*A*	41,000	31,400	13.5	11.5	1,510	6946176
	CA*F4860*6D*	G*E80805C*B*	41,000	31,400	13.5	11.5	1,510	6688290
	CA*F4860*6D*	G*VM971005CNA*	41,000	31,400	14.0	11.5	1,300	7359557
	CA*F4860*6D*	G*VC960804CNA*	41,000	31,400	14.0	11.5	1,300	7359553
	CA*F4860*6D*	G*VM971205DNA*	40,500	31,000	14.0	11.5	1,250	7359558
	CA*F4860*6D*	A*EC961205DNA*	40,000	30,600	13.5	11.3	1,400	7367000
	CA*F4860*6D*	G*EC961205DNA*	40,000	30,600	13.5	11.3	1,400	7366894
	CA*F4860*6D*	G*EC961004CNA*	39,500	30,200	14.0	11.5	1,275	7366889
	CA*F4860*6D*	G*VC961005CNA*	41,000	31,400	14.0	11.5	1,300	7359554
	CA*F4860*6D*	A*VM971205DNA*	40,500	31,000	14.0	11.5	1,250	7359552
	CA*F4860*6D*	A*VM971005CNA*	41,000	31,400	14.0	11.5	1,300	7359551
	CA*F4860*6D*	A*VM970804CNA*	41,000	31,400	14.0	11.5	1,300	7359550
	CA*F4860*6D*	G*VC961205DNA*	40,500	31,000	14.0	11.5	1,250	7359555
	CA*F4860*6D*	A*EC961004CNA*	39,500	30,200	14.0	11.5	1,275	7366995
	CA*F4860*6D*	G*VM970804CNA*	41,000	31,400	14.0	11.5	1,300	7359556
	CA*F4860*6D*	A*VC960804CNA*	41,000	31,400	14.0	11.5	1,300	7359547
	CA*F4860*6D*	A*VC961205DNA*	40,500	31,000	14.0	11.5	1,250	7359549
	CA*F4860*6D*	A*VC961005CNA*	41,000	31,400	14.0	11.5	1,300	7359548
	CA*F4860*6D*+EEP		41,000	31,400	13.0	11.0	1,400	6688303
	CA*F4860*6D*+MBVC1600**.-1A*		41,000	31,400	14.0	11.5	1,400	6688304
	CA*F4860*6D*+TXV	G*VM971205DNA*	40,500	31,000	14.0	11.5	1,250	7359570
	CA*F4860*6D*+TXV	G*EC961004CNA*	39,500	30,200	14.0	11.5	1,275	7366890
	CA*F4860*6D*+TXV	A*VC961205DNA*	40,500	31,000	14.0	11.5	1,250	7359561
	CA*F4860*6D*+TXV	A*VC960804CNA*	41,000	31,400	14.0	11.5	1,300	7359559
	CA*F4860*6D*+TXV	G*VC961205DNA*	40,500	31,000	14.0	11.5	1,250	7359567
	CA*F4860*6D*+TXV	A*EC961205DNA*	40,000	30,600	14.0	11.5	1,400	7367001
	CA*F4860*6D*+TXV	G*VM970804CNA*	41,000	31,400	14.0	11.5	1,300	7359568
	CA*F4860*6D*+TXV	A*VM971005CNA*	41,000	31,400	14.0	11.5	1,300	7359563
	CA*F4860*6D*+TXV	A*EC961004CNA*	39,500	30,200	14.0	11.5	1,275	7366996
	CA*F4860*6D*+TXV	G*VC961005CNA*	41,000	31,400	14.0	11.5	1,300	7359566
	CA*F4860*6D*+TXV	A*VC961005CNA*	41,000	31,400	14.0	11.5	1,300	7359560

See Notes on Page 51.

OUTDOOR UNIT	INDOOR UNITS		COOLING RATINGS				CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL ¹	SENS. ¹	SEER ²	EER ³		
ANX13 0421A* (Contd.)	CA*F4860*6D*+TXV	A*VM971205DNA*	40,500	31,000	14.0	11.5	1,250	7359564
	CA*F4860*6D*+TXV	G*VM971005CNA*	41,000	31,400	14.0	11.5	1,300	7359569
	CA*F4860*6D*+TXV	A*VM970804CNA*	41,000	31,400	14.0	11.5	1,300	7359562
	CA*F4860*6D*+TXV	G*EC961205DNA*	40,000	30,600	14.0	11.5	1,400	7366895
	CA*F4860*6D*+TXV	G*VC960804CNA*	41,000	31,400	14.0	11.5	1,300	7359565
	CA*F4961*6D*+EEP		41,000	31,400	13.0	11.0	1,400	6688305
	CAPT4961*4A*	A*VC961005CNA*	41,000	31,400	14.0	11.5	1,300	7359572
	CAPT4961*4A*	A*VC960804CNA*	41,000	31,400	14.0	11.5	1,300	7359571
	CAPT4961*4A*	A*VM971205DNA*	40,500	31,000	14.0	11.5	1,250	7359576
	CAPT4961*4A*	G*VM971205DNA*	40,500	31,000	14.0	11.5	1,250	7359582
	CAPT4961*4A*	G*VC961205DNA*	40,500	31,000	14.0	11.5	1,250	7359579
	CAPT4961*4A*	A*VC80805C*B*	41,000	31,400	14.0	12.0	1,395	6994235
	CAPT4961*4A*	G*E80805C*B*	41,000	31,400	14.0	12.0	1,350	6994220
	CAPT4961*4A*	A*EC961205DNA*	40,500	31,000	14.0	11.5	1,400	7367002
	CAPT4961*4A*	ADVC81005C*B*	41,000	31,400	14.0	12.0	1,405	6994248
	CAPT4961*4A*	G*VC960804CNA*	41,000	31,400	14.0	11.5	1,300	7359577
	CAPT4961*4A*	A*VM970804CNA*	41,000	31,400	14.0	11.5	1,300	7359574
	CAPT4961*4A*	ADVC80805C*B*	41,000	31,400	14.0	12.0	1,380	6994247
	CAPT4961*4A*	A*VC961205DNA*	40,500	31,000	14.0	11.5	1,250	7359573
	CAPT4961*4A*	G*VC961005CNA*	41,000	31,400	14.0	11.5	1,300	7359578
	CAPT4961*4A*	G*VM971005CNA*	41,000	31,400	14.0	11.5	1,300	7359581
	CAPT4961*4A*	A*VM971005CNA*	41,000	31,400	14.0	11.5	1,300	7359575
	CAPT4961*4A*	G*VM970804CNA*	41,000	31,400	14.0	11.5	1,300	7359580
	CAPT4961*4A*	G*EC961004CNA*	39,500	30,200	14.0	11.5	1,275	7366891
	CAPT4961*4A*	G*E81005C*B*	41,000	31,400	14.0	12.0	1,300	6994221
	CAPT4961*4A*	A*EC961004CNA*	39,500	30,200	14.0	11.5	1,275	7366997
	CAPT4961*4A*	A*VC80604B*B*	41,000	31,400	14.0	12.0	1,410	6994234
	CAPT4961*4A*	A*VC81005C*B*	41,000	31,400	14.0	12.0	1,370	6994236
	CAPT4961*4A*	G*E80603B*B*	41,000	31,400	13.5	11.5	1,355	6994219
	CAPT4961*4A*	G*EC961205DNA*	40,500	31,000	14.0	11.5	1,400	7366896
	CAPT4961*4A*+EEP		40,500	31,000	13.0	11.0	1,400	6688306
	CAPT4961*4A*+MBVC1600*-1A*		41,000	31,400	14.0	11.5	1,375	6688307
	CAPT4961*4A*+MBVC2000*-1A*		41,000	31,400	14.0	11.5	1,400	6688308
	CHPF3642C6C*	G*E80805C*B*	40,000	30,600	13.0	11.3	1,350	6688309
	CHPF3642C6C*	A*EH800805C*A*	40,000	30,600	13.0	11.3	1,350	6946179
	CHPF3642C6C*+EEP		39,000	30,600	13.0	11.0	1,075	6688310
	CHPF3642D6C*+EEP		40,000	30,600	13.0	11.0	1,400	6688322
	CHPF3743C6B*	A*VM971205DNA*	40,000	30,600	13.5	11.3	1,250	7360615
	CHPF3743C6B*	G*VC960804CNA*	40,500	31,000	13.5	11.3	1,300	7359587
	CHPF3743C6B*	G*VM971205DNA*	40,000	30,600	13.5	11.3	1,250	7360617
	CHPF3743C6B*	G*VM970804CNA*	40,500	31,000	13.5	11.3	1,300	7359589
	CHPF3743C6B*	G*VC961005CNA*	40,500	31,000	13.5	11.3	1,300	7359588
	CHPF3743C6B*	A*VM971005CNA*	40,500	31,000	13.5	11.3	1,300	7359586
	CHPF3743C6B*	G*VM971005CNA*	40,500	31,000	13.5	11.3	1,300	7359590
	CHPF3743C6B*	A*VC960804CNA*	40,500	31,000	13.5	11.3	1,300	7359583
	CHPF3743C6B*	G*VC961205DNA*	40,000	30,600	13.5	11.3	1,250	7360616
	CHPF3743C6B*	A*VC961005CNA*	40,500	31,000	13.5	11.3	1,300	7359584
	CHPF3743C6B*	A*VM970804CNA*	40,500	31,000	13.5	11.3	1,300	7359585
	CHPF3743C6B*	A*VC961205DNA*	40,000	30,600	13.5	11.3	1,250	7360614

See Notes on Page 51.

OUTDOOR UNIT	INDOOR UNITS		COOLING RATINGS				CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL ¹	SENS. ¹	SEER ²	EER ³		
ANX13 0421A* (Contd.)	CHPF3743C6B*+EEP		40,000	30,600	13.0	11.0	1,400	6688323
	CHPF3743C6B*+TXV	G*VM971005CNA*	40,500	31,000	14.0	11.5	1,300	7359598
	CHPF3743C6B*+TXV	A*VM971205DNA*	40,000	30,600	14.0	11.5	1,250	7360619
	CHPF3743C6B*+TXV	G*VC960804CNA*	40,500	31,000	14.0	11.5	1,300	7359595
	CHPF3743C6B*+TXV	A*VM971005CNA*	40,500	31,000	14.0	11.5	1,300	7359594
	CHPF3743C6B*+TXV	A*VC961205DNA*	40,000	30,600	14.0	11.5	1,250	7360618
	CHPF3743C6B*+TXV	A*VM970804CNA*	40,500	31,000	14.0	11.5	1,300	7359593
	CHPF3743C6B*+TXV	G*VM971205DNA*	40,000	30,600	14.0	11.5	1,250	7360621
	CHPF3743C6B*+TXV	A*VC961005CNA*	40,500	31,000	14.0	11.5	1,300	7359592
	CHPF3743C6B*+TXV	G*VM970804CNA*	40,500	31,000	14.0	11.5	1,300	7359597
	CHPF3743C6B*+TXV	G*VC961005CNA*	40,500	31,000	14.0	11.5	1,300	7359596
	CHPF3743C6B*+TXV	A*VC960804CNA*	40,500	31,000	14.0	11.5	1,300	7359591
	CHPF3743C6B*+TXV	G*VC961205DNA*	40,000	30,600	14.0	11.5	1,250	7360620
	CHPF4860D6D*	G*VM970804CNA*	41,000	31,400	14.0	11.5	1,300	7359608
	CHPF4860D6D*	A*EC961205DNA*	40,500	31,000	13.5	11.3	1,400	7367003
	CHPF4860D6D*	G*EC961205DNA*	40,500	31,000	13.5	11.3	1,400	7366897
	CHPF4860D6D*	G*EC961004CNA*	39,500	30,200	14.0	11.5	1,275	7366892
	CHPF4860D6D*	A*VC961005CNA*	41,000	31,400	14.0	11.5	1,300	7359600
	CHPF4860D6D*	G*VC960804CNA*	41,000	31,400	14.0	11.5	1,300	7359605
	CHPF4860D6D*	A*VC960804CNA*	41,000	31,400	14.0	11.5	1,300	7359599
	CHPF4860D6D*	G*VC961005CNA*	41,000	31,400	14.0	11.5	1,300	7359606
	CHPF4860D6D*	A*EC961004CNA*	39,500	30,200	14.0	11.5	1,275	7366998
	CHPF4860D6D*	A*EH800805C*A*	41,000	31,400	13.5	11.5	1,510	6946180
	CHPF4860D6D*	G*E80805C*B*	41,000	31,400	13.5	11.5	1,400	6688332
	CHPF4860D6D*	G*VM971005CNA*	41,000	31,400	14.0	11.5	1,300	7359609
	CHPF4860D6D*	A*VC961205DNA*	40,500	31,000	14.0	11.5	1,250	7359601
	CHPF4860D6D*	A*VM971205DNA*	40,500	31,000	14.0	11.5	1,250	7359604
	CHPF4860D6D*	G*VC961205DNA*	40,500	31,000	14.0	11.5	1,250	7359607
	CHPF4860D6D*	A*VM971005CNA*	41,000	31,400	14.0	11.5	1,300	7359603
	CHPF4860D6D*	A*VM970804CNA*	41,000	31,400	14.0	11.5	1,300	7359602
	CHPF4860D6D*	G*VM971205DNA*	40,500	31,000	14.0	11.5	1,250	7359610
	CHPF4860D6D*+EEP		41,000	31,400	13.0	11.0	1,400	6688343
	CHPF4860D6D*+MBVC1600**-1A*		41,000	31,400	14.0	11.5	1,400	6688344
	CHPF4860D6D*+TXV	A*EC961004CNA*	39,500	30,200	14.0	11.5	1,275	7366999
	CHPF4860D6D*+TXV	G*VM970804CNA*	41,000	31,400	14.0	11.5	1,300	7359620
	CHPF4860D6D*+TXV	A*EC961205DNA*	40,500	31,000	14.0	11.5	1,400	7367004
	CHPF4860D6D*+TXV	A*VM971205DNA*	40,500	31,000	14.0	11.5	1,250	7359616
	CHPF4860D6D*+TXV	G*VC960804CNA*	41,000	31,400	14.0	11.5	1,300	7359617
	CHPF4860D6D*+TXV	G*VC961005CNA*	41,000	31,400	14.0	11.5	1,300	7359618
	CHPF4860D6D*+TXV	A*VM971005CNA*	41,000	31,400	14.0	11.5	1,300	7359615
	CHPF4860D6D*+TXV	G*VM971205DNA*	40,500	31,000	14.0	11.5	1,250	7359622
	CHPF4860D6D*+TXV	A*VC961005CNA*	41,000	31,400	14.0	11.5	1,300	7359612
	CHPF4860D6D*+TXV	G*EC961205DNA*	40,500	31,000	14.0	11.5	1,400	7366898
	CHPF4860D6D*+TXV	A*VC961205DNA*	40,500	31,000	14.0	11.5	1,250	7359613
	CHPF4860D6D*+TXV	A*VM970804CNA*	41,000	31,400	14.0	11.5	1,300	7359614
	CHPF4860D6D*+TXV	G*VC961205DNA*	40,500	31,000	14.0	11.5	1,250	7359619
	CHPF4860D6D*+TXV	G*VM971005CNA*	41,000	31,400	14.0	11.5	1,300	7359621
	CHPF4860D6D*+TXV	G*EC961004CNA*	39,500	30,200	14.0	11.5	1,275	7366893
	CHPF4860D6D*+TXV	A*VC960804CNA*	41,000	31,400	14.0	11.5	1,300	7359611

See Notes on Page 51.

OUTDOOR UNIT	INDOOR UNITS		COOLING RATINGS				CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL ¹	SENS. ¹	SEER ²	EER ³		
ANX13 0421A* (Contd.)	CSCF3642N6D*+EEP		40,000	30,600	13.0	11.0	1,325	6688345
	CSCF4860N6D*	A*VC960804CNA*	41,000	31,400	13.5	11.3	1,300	7359623
	CSCF4860N6D*	A*VC961205DNA*	40,500	31,000	13.5	11.3	1,250	7359625
	CSCF4860N6D*	G*VC961205DNA*	40,500	31,000	13.5	11.3	1,250	7359631
	CSCF4860N6D*	G*VM971205DNA*	40,500	31,000	13.5	11.3	1,250	7359634
	CSCF4860N6D*	A*VC961005CNA*	41,000	31,400	13.5	11.5	1,300	7359624
	CSCF4860N6D*	G*VM970804CNA*	41,000	31,400	13.5	11.3	1,300	7359632
	CSCF4860N6D*	G*VC960804CNA*	41,000	31,400	13.5	11.3	1,300	7359629
	CSCF4860N6D*	G*VM971005CNA*	41,000	31,400	13.5	11.5	1,300	7359633
	CSCF4860N6D*	A*VM970804CNA*	41,000	31,400	13.5	11.3	1,300	7359626
	CSCF4860N6D*	A*VM971205DNA*	40,500	31,000	13.5	11.3	1,250	7359628
	CSCF4860N6D*	A*VM971005CNA*	41,000	31,400	13.5	11.5	1,300	7359627
	CSCF4860N6D*	G*VC961005CNA*	41,000	31,400	13.5	11.5	1,300	7359630
	CSCF4860N6D*+EEP		41,000	31,400	13.0	11.0	1,325	6688349
	CSCF4860N6D*+TXV	A*VC960804CNA*	41,000	31,400	14.0	11.5	1,300	7359635
	CSCF4860N6D*+TXV	A*VM971005CNA*	41,000	31,400	14.0	11.5	1,300	7359639
	CSCF4860N6D*+TXV	A*VC961205DNA*	40,500	31,000	14.0	11.5	1,250	7359637
	CSCF4860N6D*+TXV	A*VM970804CNA*	41,000	31,400	14.0	11.5	1,300	7359638
	CSCF4860N6D*+TXV	G*VC961005CNA*	41,000	31,400	14.0	11.5	1,300	7359642
	CSCF4860N6D*+TXV	A*VM971205DNA*	40,500	31,000	14.0	11.5	1,250	7359640
	CSCF4860N6D*+TXV	G*VC960804CNA*	41,000	31,400	14.0	11.5	1,300	7359641
	CSCF4860N6D*+TXV	G*VM971205DNA*	40,500	31,000	14.0	11.5	1,250	7359646
	CSCF4860N6D*+TXV	G*VC961205DNA*	40,500	31,000	14.0	11.5	1,250	7359643
	CSCF4860N6D*+TXV	A*VC961005CNA*	41,000	31,400	14.0	11.5	1,300	7359636
	CSCF4860N6D*+TXV	G*VM970804CNA*	41,000	31,400	14.0	11.5	1,300	7359644
	CSCF4860N6D*+TXV	G*VM971005CNA*	41,000	31,400	14.0	11.5	1,300	7359645
ANX13 0481A*	ARUF47D14A*		45,000	34,600	13.0	11.0	1,515	7988978
	ARUF48D14A*+TXV		44,500	34,200	13.0	11.0	1,550	6688353
	ARUF49D14A*		45,000	34,600	13.0	11.0	1,455	8171735
	ARUF60D14A*+TXV		44,500	34,200	13.0	11.0	1,460	6688355
	ASPT49D14A*		45,000	34,600	14.0	11.5	1,430	8245676
	AVPTC48C14A*		44,000	33,800	13.0	11.0	1,450	7080481
	AVPTC48D14A*		46,000	35,200	13.8	11.3	1,615	6688360
	AVPTC59C14A*		45,000	34,600	13.0	11.0	1,485	8996515
	AVPTC59D14A*		45,500	34,800	14.0	12.0	1,580	9000377
	AVPTC61D14A*		46,000	35,200	14.0	12.0	1,455	9000378
	CA*F4860*6D*+EEP		46,000	35,200	13.0	11.0	1,600	6688361
	CA*F4860*6D*+MBVC2000*-1A*		46,000	35,200	14.0	11.3	1,600	6688362
	CA*F4860*6D*+TXV	A*EH800805C*A*	46,000	35,200	13.5	11.3	1,650	6946183
	CA*F4860*6D*+TXV	G*EC961004CNA*	46,000	35,200	14.0	11.5	1,550	7366899
	CA*F4860*6D*+TXV	G*E80805C*B*	46,000	35,200	13.5	11.3	1,650	6688373
	CA*F4860*6D*+TXV	G*E81005C*B*	46,000	35,200	13.5	11.3	1,570	6688374
	CA*F4860*6D*+TXV	A*EC961004CNA*	46,000	35,200	14.0	11.5	1,550	7367005
	CA*F4860*6D*+TXV	A*EH801005C*A*	46,000	35,200	13.5	11.3	1,570	6946184
	CA*F4961*6D*	G*EC961205DNA*	45,500	34,800	14.0	11.5	1,525	7366904
	CA*F4961*6D*	A*EC961205DNA*	45,500	34,800	14.0	11.5	1,525	7367010
	CA*F4961*6D*+EEP		46,000	35,200	13.0	11.0	1,600	6688387
	CA*F4961*6D*+TXV	G*VC961205DNA*	46,000	35,200	14.0	11.5	1,575	7359655
	CA*F4961*6D*+TXV	G*VM971005CNA*	45,000	34,600	14.0	11.5	1,520	7359657

See Notes on Page 51.

OUTDOOR UNIT	INDOOR UNITS		COOLING RATINGS				CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL ¹	SENS. ¹	SEER ²	EER ³		
ANX13 0481A* (Contd.)	CA*F4961*6D*+TXV	A*VC961005CNA*	45,000	34,600	14.0	11.5	1,520	7359648
	CA*F4961*6D*+TXV	G*VC960804CNA*	45,000	34,600	14.0	11.5	1,585	7359653
	CA*F4961*6D*+TXV	G*VM971205DNA*	46,000	35,200	14.0	11.5	1,575	7359658
	CA*F4961*6D*+TXV	A*VC961205DNA*	46,000	35,200	14.0	11.5	1,575	7359649
	CA*F4961*6D*+TXV	A*VM971005CNA*	45,000	34,600	14.0	11.5	1,520	7359651
	CA*F4961*6D*+TXV	A*VM971205DNA*	46,000	35,200	14.0	11.5	1,575	7359652
	CA*F4961*6D*+TXV	G*EC961004CNA*	46,000	35,200	14.0	11.5	1,550	7366900
	CA*F4961*6D*+TXV	A*VM970804CNA*	45,000	34,600	14.0	11.5	1,585	7359650
	CA*F4961*6D*+TXV	A*EC961004CNA*	46,000	35,200	14.0	11.5	1,550	7367006
	CA*F4961*6D*+TXV	G*VC961005CNA*	45,000	34,600	14.0	11.5	1,520	7359654
	CA*F4961*6D*+TXV	G*EC961205DNA*	46,000	35,200	14.0	11.5	1,525	7366905
	CA*F4961*6D*+TXV	G*VM970804CNA*	45,000	34,600	14.0	11.5	1,585	7359656
	CA*F4961*6D*+TXV	A*VC960804CNA*	45,000	34,600	14.0	11.5	1,585	7359647
	CA*F4961*6D*+TXV	A*EC961205DNA*	46,000	35,200	14.0	11.5	1,525	7367011
	CAPT4961*4A*	G*VM971005CNA*	45,000	34,600	14.0	11.5	1,520	7359669
	CAPT4961*4A*	ADVC80805C*B*	47,000	36,000	13.5	11.5	1,585	6994309
	CAPT4961*4A*	G*VC960804CNA*	45,000	34,600	13.5	11.3	1,585	7359665
	CAPT4961*4A*	A*VC81005C*B*	47,000	36,000	13.5	11.5	1,600	6994298
	CAPT4961*4A*	G*EC961004CNA*	46,000	35,200	14.0	11.5	1,550	7366901
	CAPT4961*4A*	A*VC960804CNA*	45,000	34,600	13.5	11.3	1,585	7359659
	CAPT4961*4A*	A*VC80805C*B*	47,000	36,000	13.5	11.5	1,590	6994297
	CAPT4961*4A*	G*VC961005CNA*	45,000	34,600	14.0	11.5	1,520	7359666
	CAPT4961*4A*	G*E81005C*B*	47,000	36,000	13.5	11.5	1,570	6994284
	CAPT4961*4A*	G*VC961205DNA*	46,000	35,200	14.0	11.5	1,575	7359667
	CAPT4961*4A*	A*VC80604B*B*	47,000	36,000	13.5	11.5	1,545	6994296
	CAPT4961*4A*	ADVC81005C*B*	47,000	36,000	13.5	11.5	1,620	6994310
	CAPT4961*4A*	G*EC961205DNA*	46,000	35,200	13.5	11.3	1,525	7366906
	CAPT4961*4A*	A*EC961004CNA*	46,000	35,200	14.0	11.5	1,550	7367007
	CAPT4961*4A*	A*VC961005CNA*	45,000	34,600	14.0	11.5	1,520	7359660
	CAPT4961*4A*	A*EC961205DNA*	46,000	35,200	13.5	11.3	1,525	7367012
	CAPT4961*4A*	A*VM970804CNA*	45,000	34,600	13.5	11.3	1,585	7359662
	CAPT4961*4A*	G*E80805C*B*	46,000	35,200	13.5	11.5	1,480	6994283
	CAPT4961*4A*	A*VM971205DNA*	46,000	35,200	14.0	11.5	1,575	7359664
	CAPT4961*4A*	A*VC961205DNA*	46,000	35,200	14.0	11.5	1,575	7359661
	CAPT4961*4A*	G*VM970804CNA*	45,000	34,600	13.5	11.3	1,585	7359668
	CAPT4961*4A*	G*VM971205DNA*	46,000	35,200	14.0	11.5	1,575	7359670
	CAPT4961*4A*	A*VM971005CNA*	45,000	34,600	14.0	11.5	1,520	7359663
	CAPT4961*4A*+EEP		46,500	35,600	13.0	11.0	1,600	6688388
	CAPT4961*4A*+MBVC1600**-1A*		47,000	36,000	14.0	11.5	1,500	6688389
	CAPT4961*4A*+MBVC2000**-1A*		47,000	36,000	14.0	11.5	1,550	6688390
	CHPF4860D6D*	A*EC961205DNA*	45,500	34,800	13.5	11.3	1,525	7367013
	CHPF4860D6D*	A*EC961004CNA*	45,500	34,800	13.5	11.5	1,550	7367008
	CHPF4860D6D*	G*EC961004CNA*	45,500	34,800	13.5	11.5	1,550	7366902
	CHPF4860D6D*	G*EC961205DNA*	45,500	34,800	13.5	11.3	1,525	7366907
	CHPF4860D6D*+EEP		46,000	35,200	13.0	11.0	1,600	6688391
	CHPF4860D6D*+MBVC2000**-1A*		46,000	35,200	14.0	11.3	1,600	6688392
	CHPF4860D6D*+TXV	A*EC961004CNA*	45,500	34,800	14.0	11.5	1,550	7367009
	CHPF4860D6D*+TXV	A*EH800805C*A*	46,000	35,200	13.5	11.3	1,650	6946187
	CHPF4860D6D*+TXV	G*E81005C*B*	46,000	35,200	13.5	11.3	1,570	6688402

See Notes on Page 51.

OUTDOOR UNIT	INDOOR UNITS		COOLING RATINGS				CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL ¹	SENS. ¹	SEER ²	EER ³		
ANX13 0481A* (Contd.)	CHPF4860D6D*+TXV	A*EC961205DNA*	45,500	34,800	14.0	11.5	1,525	7367014
	CHPF4860D6D*+TXV	G*VM971205DNA*	46,000	35,200	14.0	11.5	1,575	7359682
	CHPF4860D6D*+TXV	G*VM970804CNA*	45,000	34,600	14.0	11.5	1,585	7359680
	CHPF4860D6D*+TXV	A*EH801005C*A*	46,000	35,200	13.5	11.3	1,570	6946188
	CHPF4860D6D*+TXV	A*VM970804CNA*	45,000	34,600	14.0	11.5	1,585	7359674
	CHPF4860D6D*+TXV	A*VC961205DNA*	46,000	35,200	14.0	11.5	1,575	7359673
	CHPF4860D6D*+TXV	A*VM971205DNA*	46,000	35,200	14.0	11.5	1,575	7359676
	CHPF4860D6D*+TXV	G*VM971005CNA*	45,000	34,600	14.0	11.5	1,520	7359681
	CHPF4860D6D*+TXV	G*EC961205DNA*	45,500	34,800	14.0	11.5	1,525	7366908
	CHPF4860D6D*+TXV	G*VC961205DNA*	46,000	35,200	14.0	11.5	1,575	7359679
	CHPF4860D6D*+TXV	G*VC961005CNA*	45,000	34,600	14.0	11.5	1,520	7359678
	CHPF4860D6D*+TXV	G*E80805C*B*	46,000	35,200	13.5	11.3	1,650	6688401
	CHPF4860D6D*+TXV	G*EC961004CNA*	45,500	34,800	14.0	11.5	1,550	7366903
	CHPF4860D6D*+TXV	A*VC960804CNA*	45,000	34,600	14.0	11.5	1,585	7359671
	CHPF4860D6D*+TXV	A*VC961005CNA*	45,000	34,600	14.0	11.5	1,520	7359672
	CHPF4860D6D*+TXV	G*VC960804CNA*	45,000	34,600	14.0	11.5	1,585	7359677
	CHPF4860D6D*+TXV	A*VM971005CNA*	45,000	34,600	14.0	11.5	1,520	7359675
	CSCF4860N6D*+EEP		46,000	35,200	13.0	11.0	1,600	6688413
	CSCF4860N6D*+TXV	A*VC961005CNA*	44,500	34,200	14.0	11.5	1,520	7359684
	CSCF4860N6D*+TXV	G*VC961205DNA*	45,500	34,800	14.0	11.5	1,575	7359691
	CSCF4860N6D*+TXV	G*VC961005CNA*	44,500	34,200	14.0	11.5	1,520	7359690
	CSCF4860N6D*+TXV	G*VM971205DNA*	45,500	34,800	14.0	11.5	1,575	7359694
	CSCF4860N6D*+TXV	A*VM970804CNA*	44,500	34,200	13.5	11.3	1,585	7359686
	CSCF4860N6D*+TXV	G*VM971005CNA*	44,500	34,200	14.0	11.5	1,520	7359693
	CSCF4860N6D*+TXV	A*VM971205DNA*	45,500	34,800	14.0	11.5	1,575	7359688
	CSCF4860N6D*+TXV	G*VC960804CNA*	44,500	34,200	13.5	11.3	1,585	7359689
	CSCF4860N6D*+TXV	A*VM971005CNA*	44,500	34,200	14.0	11.5	1,520	7359687
	CSCF4860N6D*+TXV	A*VC960804CNA*	44,500	34,200	13.5	11.3	1,585	7359683
	CSCF4860N6D*+TXV	G*VM970804CNA*	44,500	34,200	13.5	11.3	1,585	7359692
	CSCF4860N6D*+TXV	A*VC961205DNA*	45,500	34,800	14.0	11.5	1,575	7359685
ANX13 0601A*	AVPTC59D14A*		55,000	39,000	13.0	11.0	1,660	8996516
	AVPTC60D14A*		56,000	40,000	13.0	11.0	1,750	6688422
	AVPTC61D14A*		56,000	40,000	13.5	11.5	1,775	8996517
	CA*F4961*6D*+EEP		55,500	39,500	13.0	11.0	1,650	6688423
	CA*F4961*6D*+MBVC2000**--1A*		56,000	40,000	13.5	11.5	1,650	6688424
	CA*F4961*6D*+MBVC2000**--1A*+TXV		56,000	40,000	13.5	11.5	1,750	6688425
	CA*F4961*6D*+TXV	G*VC961005CNA*	54,000	38,500	13.0	11.0	1,600	7359702
	CA*F4961*6D*+TXV	G*VM971005CNA*	54,000	38,500	13.0	11.0	1,600	7359705
	CA*F4961*6D*+TXV	G*VC81005C*B*	55,500	39,500	13.3	11.2	1,700	6688439
	CA*F4961*6D*+TXV	G*E81005C*B*	55,000	39,000	13.3	11.2	1,720	6688437
	CA*F4961*6D*+TXV	G*VM970804CNA*	54,000	38,500	13.5	11.0	1,585	7359704
	CA*F4961*6D*+TXV	A*VC961005CNA*	54,000	38,500	13.0	11.0	1,600	7359696
	CA*F4961*6D*+TXV	A*VM971205DNA*	54,000	38,500	13.5	11.5	1,585	7359700
	CA*F4961*6D*+TXV	A*VM970804CNA*	54,000	38,500	13.5	11.0	1,585	7359698
	CA*F4961*6D*+TXV	A*EC961205DNA*	56,500	40,000	13.0	11.0	1,950	7367015
	CA*F4961*6D*+TXV	A*VC961205DNA*	54,000	38,500	13.5	11.5	1,585	7359697
	CA*F4961*6D*+TXV	A*VM971005CNA*	54,000	38,500	13.0	11.0	1,600	7359699
	CA*F4961*6D*+TXV	G*VC961205DNA*	54,000	38,500	13.5	11.5	1,585	7359703
	CA*F4961*6D*+TXV	A*VC80805C*B*	55,500	39,500	13.3	11.2	1,800	6688426

See Notes on Page 51.

OUTDOOR UNIT	INDOOR UNITS		COOLING RATINGS				CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL ¹	SENS. ¹	SEER ²	EER ³		
ANX13 0601A* (Contd.)	CA*F4961*6D*+TXV	G*EC961205DNA*	56,500	40,000	13.0	11.0	1,950	7366909
	CA*F4961*6D*+TXV	A*VC960804CNA*	54,000	38,500	13.5	11.0	1,585	7359695
	CA*F4961*6D*+TXV	G*VC960804CNA*	54,000	38,500	13.5	11.0	1,585	7359701
	CA*F4961*6D*+TXV	G*VM971205DNA*	54,000	38,500	13.5	11.5	1,585	7359706
	CA*F4961*6D*+TXV	G*E80805C*B*	54,500	38,500	13.3	11.2	1,650	6688436
	CA*F4961*6D*+TXV	G*VC80805C*B*	55,500	39,500	13.3	11.2	1,700	6688438
	CA*F4961*6D*+TXV	A*VC81005C*B*	55,500	39,500	13.3	11.2	1,800	6688427
	CAPT4961*4A*	G*VC80805C*B*	55,500	39,500	13.0	11.0	1,625	6688464
	CAPT4961*4A*	A*VC81005C*B*	55,500	39,500	13.0	11.0	1,625	6688450
	CAPT4961*4A*	G*VC961005CNA*	54,000	38,500	13.0	11.0	1,600	7359714
	CAPT4961*4A*	G*VC81005C*B*	55,500	39,500	13.0	11.0	1,625	6688465
	CAPT4961*4A*	A*EC961205DNA*	56,500	40,000	13.0	11.0	1,950	7367016
	CAPT4961*4A*	A*VM970804CNA*	54,000	38,500	13.0	11.0	1,585	7359710
	CAPT4961*4A*	A*VC80805C*B*	55,500	39,500	13.0	11.0	1,625	6688449
	CAPT4961*4A*	G*VC960804CNA*	54,000	38,500	13.0	11.0	1,585	7359713
	CAPT4961*4A*	ADVC81005C*B*	55,500	39,500	13.0	11.0	1,625	6688461
	CAPT4961*4A*	G*EC961205DNA*	56,500	40,000	13.0	11.0	1,950	7366910
	CAPT4961*4A*	G*VM970804CNA*	54,000	38,500	13.0	11.0	1,585	7359716
	CAPT4961*4A*	G*E80805C*B*	54,500	38,500	13.0	11.0	1,675	6688462
	CAPT4961*4A*	ADVC80805C*B*	55,500	39,500	13.0	11.0	1,625	6688460
	CAPT4961*4A*	G*VM971205DNA*	54,000	38,500	13.0	11.0	1,585	7359718
	CAPT4961*4A*	A*VC961005CNA*	54,000	38,500	13.0	11.0	1,600	7359708
	CAPT4961*4A*	A*VC960804CNA*	54,000	38,500	13.0	11.0	1,585	7359707
	CAPT4961*4A*	G*VC961205DNA*	54,000	38,500	13.0	11.0	1,585	7359715
	CAPT4961*4A*	A*VC961205DNA*	54,000	38,500	13.0	11.0	1,585	7359709
	CAPT4961*4A*	G*E81005C*B*	55,000	39,000	13.0	11.0	1,625	6688463
	CAPT4961*4A*	A*VM971005CNA*	54,000	38,500	13.0	11.0	1,600	7359711
	CAPT4961*4A*	G*VM971005CNA*	54,000	38,500	13.0	11.0	1,600	7359717
	CAPT4961*4A*	A*VM971205DNA*	54,000	38,500	13.0	11.0	1,585	7359712
	CAPT4961*4A*+MBVC2000**-1A*		56,000	40,000	13.5	11.5	1,625	6688476
	CHPF4860D6D*+EEP+TXV		55,500	39,500	13.0	11.0	1,500	6688477
	CHPF4860D6D*+MBVC2000**-1A*+TXV		56,000	40,000	13.5	11.5	1,625	6688478
	CHPF4860D6D*+TXV	G*VC961005CNA*	54,000	38,500	13.0	11.0	1,600	7359726
	CHPF4860D6D*+TXV	A*VC961005CNA*	54,000	38,500	13.0	11.0	1,600	7359720
	CHPF4860D6D*+TXV	A*VC81005C*B*	55,500	39,500	13.0	11.0	1,800	6688480
	CHPF4860D6D*+TXV	G*VC961205DNA*	54,000	38,500	13.5	11.5	1,585	7359727
	CHPF4860D6D*+TXV	G*EC961205DNA*	56,500	40,000	13.0	11.0	1,950	7366911
	CHPF4860D6D*+TXV	G*VM970804CNA*	54,000	38,500	13.5	11.0	1,585	7359728
	CHPF4860D6D*+TXV	G*VC81005C*B*	55,500	39,500	13.0	11.0	1,800	6688491
	CHPF4860D6D*+TXV	A*VM971005CNA*	54,000	38,500	13.0	11.0	1,600	7359723
	CHPF4860D6D*+TXV	G*E80805C*B*	54,500	38,500	13.3	11.2	1,650	6688488
	CHPF4860D6D*+TXV	G*VC960804CNA*	54,000	38,500	13.5	11.0	1,585	7359725
	CHPF4860D6D*+TXV	G*VC80805C*B*	55,500	39,500	13.0	11.0	1,800	6688490
	CHPF4860D6D*+TXV	A*VM971205DNA*	54,000	38,500	13.5	11.5	1,585	7359724
	CHPF4860D6D*+TXV	G*VM971005CNA*	54,000	38,500	13.0	11.0	1,600	7359729
	CHPF4860D6D*+TXV	G*E81005C*B*	55,000	39,000	13.3	11.2	1,720	6688489
	CHPF4860D6D*+TXV	A*VC960804CNA*	54,000	38,500	13.5	11.0	1,585	7359719
	CHPF4860D6D*+TXV	A*VC80805C*B*	55,500	39,500	13.0	11.0	1,800	6688479
	CHPF4860D6D*+TXV	A*VC961205DNA*	54,000	38,500	13.5	11.5	1,585	7359721

See Notes on Page 51.

OUTDOOR UNIT	INDOOR UNITS		COOLING RATINGS				CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL ¹	SENS. ¹	SEER ²	EER ³		
ANX13 0601A* (Contd.)	CHPF4860D6D*+TXV	A*EC961205DNA*	56,500	40,000	13.0	11.0	1,950	7367017
	CHPF4860D6D*+TXV	G*VM971205DNA*	54,000	38,500	13.5	11.5	1,585	7359730
	CHPF4860D6D*+TXV	A*VM970804CNA*	54,000	38,500	13.5	11.0	1,585	7359722
	CSCF4860N6D*+EEP		54,000	38,500	13.0	11.0	1,600	6688499
	CSCF4860N6D*+MBVC2000**-1A*		53,500	38,000	13.5	11.5	1,650	6688500
	CSCF4860N6D*+TXV	A*VC961005CNA*	54,000	38,500	13.0	11.0	1,600	7359732
	CSCF4860N6D*+TXV	A*VM971005CNA*	54,000	38,500	13.0	11.0	1,600	7359735
	CSCF4860N6D*+TXV	A*VC960804CNA*	54,000	38,500	13.0	11.0	1,585	7359731
	CSCF4860N6D*+TXV	G*VC960804CNA*	54,000	38,500	13.0	11.0	1,585	7359737
	CSCF4860N6D*+TXV	G*VM970804CNA*	54,000	38,500	13.0	11.0	1,585	7359740
	CSCF4860N6D*+TXV	A*VM970804CNA*	54,000	38,500	13.0	11.0	1,585	7359734
	CSCF4860N6D*+TXV	G*VM971205DNA*	53,500	38,000	13.5	11.0	1,585	7359742
	CSCF4860N6D*+TXV	A*VM971205DNA*	53,500	38,000	13.5	11.0	1,585	7359736
	CSCF4860N6D*+TXV	A*VC961205DNA*	53,500	38,000	13.5	11.0	1,585	7359733
	CSCF4860N6D*+TXV	G*VC961205DNA*	53,500	38,000	13.5	11.0	1,585	7359739
	CSCF4860N6D*+TXV	G*VM971005CNA*	54,000	38,500	13.0	11.0	1,600	7359741
	CSCF4860N6D*+TXV	G*VC961005CNA*	54,000	38,500	13.0	11.0	1,600	7359738
ANX13 0611A*	ARUF61D14A*		55,500	38,000	13.0	11.0	1,520	7988979
	ASPT61D14A*		56,000	38,500	14.0	11.5	1,645	8245677
	AVPTC59D14A*		56,000	38,500	13.5	11.5	1,660	8996518
	AVPTC60D14A*		56,000	38,500	14.0	11.5	1,620	6688510
	AVPTC61D14A*		57,000	39,000	14.0	11.5	1,775	8996519
	CA*F4860*6D*+EEP		55,000	37,600	13.0	11.0	1,500	6688511
	CA*F4860*6D*+MBVC2000**-1A*		56,000	38,500	13.5	11.5	1,575	6688512
	CA*F4860*6D*+MBVC2000**-1A*+TXV		56,000	38,500	14.0	11.5	1,575	6688513
	CA*F4860*6D*+TXV	A*EH801005C*A*	55,000	37,600	13.5	11.0	1,525	6946192
	CA*F4860*6D*+TXV	G*E80805C*B*	55,500	38,000	13.0	11.0	1,550	6688526
	CA*F4860*6D*+TXV	A*VC80805C*B*	55,500	38,000	13.5	11.0	1,520	6688514
	CA*F4860*6D*+TXV	G*VC80805C*B*	55,500	38,000	13.5	11.0	1,520	6688528
	CA*F4860*6D*+TXV	G*E81005C*B*	55,000	37,600	13.5	11.0	1,525	6688527
	CA*F4860*6D*+TXV	G*VC81005C*B*	55,500	38,000	13.5	11.0	1,520	6688529
	CA*F4860*6D*+TXV	A*VC81005C*B*	55,500	38,000	13.5	11.0	1,520	6688515
	CA*F4860*6D*+TXV	A*EH800805C*A*	55,500	38,000	13.0	11.0	1,550	6946191
	CA*F4860*6D*+TXV	ADVC81005C*B*	55,500	38,000	13.0	11.0	1,550	6688525
	CA*F4860*6D*+TXV	ADVC80805C*B*	55,500	38,000	13.0	11.0	1,500	6688524
	CA*F4961*6D*+EEP		56,500	38,500	13.0	11.0	1,500	6688540
	CA*F4961*6D*+MBVC2000**-1A*		57,000	39,000	14.0	11.5	1,575	6688541
	CA*F4961*6D*+MBVC2000**-1A*+TXV		57,000	39,000	14.0	12.0	1,575	6688542
	CA*F4961*6D*+TXV	G*VC961005CNA*	56,000	38,500	13.5	11.5	1,520	7359747
	CA*F4961*6D*+TXV	G*VM971205DNA*	56,000	38,500	14.0	11.5	1,545	7359750
	CA*F4961*6D*+TXV	G*VM971005CNA*	56,000	38,500	13.5	11.5	1,520	7359749
	CA*F4961*6D*+TXV	A*EH801005C*A*	56,000	38,500	14.0	11.5	1,525	6946196
	CA*F4961*6D*+TXV	G*VC80805C*B*	56,500	38,500	14.0	11.5	1,520	6688557
	CA*F4961*6D*+TXV	G*E80805C*B*	56,000	38,500	14.0	11.5	1,550	6688555
	CA*F4961*6D*+TXV	G*E81005C*B*	56,000	38,500	14.0	11.5	1,525	6688556
	CA*F4961*6D*+TXV	A*VC961005CNA*	56,000	38,500	13.5	11.5	1,520	7359743
	CA*F4961*6D*+TXV	A*VC81005C*B*	56,500	38,500	14.0	11.5	1,520	6688544
	CA*F4961*6D*+TXV	A*VC80805C*B*	56,500	38,500	14.0	11.5	1,520	6688543
	CA*F4961*6D*+TXV	ADVC81005C*B*	57,000	39,000	13.5	11.0	1,550	6688554

See Notes on Page 51.


OUTDOOR UNIT	INDOOR UNITS		COOLING RATINGS				CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL ¹	SENS. ¹	SEER ²	EER ³		
ANX13 0611A* (Contd.)	CA*F4961*6D*+TXV	G*VC81005C*B*	56,500	38,500	14.0	11.5	1,520	6688558
	CA*F4961*6D*+TXV	A*VM971205DNA*	56,000	38,500	14.0	11.5	1,545	7359746
	CA*F4961*6D*+TXV	G*EC961205DNA*	56,000	38,500	14.0	11.5	1,525	7366912
	CA*F4961*6D*+TXV	G*VC961205DNA*	56,000	38,500	14.0	11.5	1,545	7359748
	CA*F4961*6D*+TXV	A*EC961205DNA*	56,000	38,500	14.0	11.5	1,525	7367018
	CA*F4961*6D*+TXV	ADVC80805C*B*	57,000	39,000	13.5	11.0	1,500	6688553
	CA*F4961*6D*+TXV	A*VC961205DNA*	56,000	38,500	14.0	11.5	1,545	7359744
	CA*F4961*6D*+TXV	A*EH800805C*A*	56,000	38,500	14.0	11.5	1,550	6946195
	CA*F4961*6D*+TXV	A*VM971005CNA*	56,000	38,500	13.5	11.5	1,520	7359745
	CAPT4961*4A*	A*EC961205DNA*	56,000	38,500	13.5	11.5	1,525	7367019
	CAPT4961*4A*	G*VC81005C*B*	56,500	38,500	14.0	11.5	1,520	6688585
	CAPT4961*4A*	A*VC81005C*B*	56,500	38,500	14.0	11.5	1,520	6688571
	CAPT4961*4A*	G*E81005C*B*	56,000	38,500	14.0	11.5	1,525	6688583
	CAPT4961*4A*	A*VC961205DNA*	56,000	38,500	13.5	11.5	1,545	7359752
	CAPT4961*4A*	A*EH800805C*A*	56,000	38,500	14.0	11.5	1,550	6946199
	CAPT4961*4A*	A*EH801005C*A*	56,000	38,500	14.0	11.5	1,525	6946200
	CAPT4961*4A*	ADVC80805C*B*	57,000	39,000	13.5	11.0	1,500	6688580
	CAPT4961*4A*	G*E80805C*B*	56,000	38,500	14.0	11.5	1,550	6688582
	CAPT4961*4A*	A*VM971005CNA*	56,000	38,500	13.5	11.0	1,520	7359753
	CAPT4961*4A*	G*VC961205DNA*	56,000	38,500	13.5	11.5	1,545	7359756
	CAPT4961*4A*	ADVC81005C*B*	57,000	39,000	13.5	11.0	1,550	6688581
	CAPT4961*4A*	G*VM971205DNA*	56,000	38,500	13.5	11.5	1,545	7359758
	CAPT4961*4A*	A*VM971205DNA*	56,000	38,500	13.5	11.5	1,545	7359754
	CAPT4961*4A*	A*VC80805C*B*	56,500	38,500	14.0	11.5	1,520	6688570
	CAPT4961*4A*	A*VC961005CNA*	56,000	38,500	13.5	11.0	1,520	7359751
	CAPT4961*4A*	G*VC80805C*B*	56,500	38,500	14.0	11.5	1,520	6688584
	CAPT4961*4A*	G*VM971005CNA*	56,000	38,500	13.5	11.0	1,520	7359757
	CAPT4961*4A*	G*EC961205DNA*	56,000	38,500	13.5	11.5	1,525	7366913
	CAPT4961*4A*	G*VC961005CNA*	56,000	38,500	13.5	11.0	1,520	7359755
	CAPT4961*4A*+EEP		56,500	38,500	13.5	11.0	1,500	6688597
	CAPT4961*4A*+MBVC1600**-1A*		57,000	39,000	13.5	11.5	1,560	6994345
	CAPT4961*4A*+MBVC2000**-1A*		57,000	39,000	14.0	12.0	1,575	6688598
	CHPF4860D6D*+EEP		56,000	38,500	13.0	11.0	1,500	6688599
	CHPF4860D6D*+MBVC2000**-1A*		57,000	39,000	14.0	11.5	1,575	6688600
	CHPF4860D6D*+MBVC2000**-1A*+TXV		57,000	39,000	14.0	11.5	1,575	6688601
	CHPF4860D6D*+TXV	G*EC961205DNA*	56,000	38,500	14.0	11.5	1,525	7366914
	CHPF4860D6D*+TXV	A*VM971205DNA*	56,000	38,500	14.0	11.5	1,545	7359762
	CHPF4860D6D*+TXV	G*VM971005CNA*	56,000	38,500	13.5	11.0	1,520	7359765
	CHPF4860D6D*+TXV	G*E80805C*B*	56,000	38,500	14.0	11.5	1,550	6688612
	CHPF4860D6D*+TXV	A*EH801005C*A*	56,000	38,500	14.0	11.5	1,525	6946204
	CHPF4860D6D*+TXV	G*VC80805C*B*	56,000	38,500	14.0	11.5	1,520	6688614
	CHPF4860D6D*+TXV	A*VC961205DNA*	56,000	38,500	14.0	11.5	1,545	7359760
	CHPF4860D6D*+TXV	A*VM971005CNA*	56,000	38,500	13.5	11.0	1,520	7359761
	CHPF4860D6D*+TXV	A*VC80805C*B*	56,000	38,500	14.0	11.5	1,520	6688602
	CHPF4860D6D*+TXV	A*VC961005CNA*	56,000	38,500	13.5	11.0	1,520	7359759
	CHPF4860D6D*+TXV	A*VC81005C*B*	56,500	38,500	14.0	11.5	1,520	6688603
	CHPF4860D6D*+TXV	G*VC961005CNA*	56,000	38,500	13.5	11.0	1,520	7359763
	CHPF4860D6D*+TXV	A*EH800805C*A*	56,000	38,500	14.0	11.5	1,550	6946203
	CHPF4860D6D*+TXV	G*VC961205DNA*	56,000	38,500	14.0	11.5	1,545	7359764


See Notes on Page 51.

OUTDOOR UNIT	INDOOR UNITS		COOLING RATINGS				CFM	AHRI #
	COILS/AIR HANDLERS	FURNACES	TOTAL ¹	SENS. ¹	SEER ²	EER ³		
ANX13 0611A* (Contd.)	CHPF4860D6D*+TXV	G*E81005C*B*	56,000	38,500	14.0	11.5	1,525	6688613
	CHPF4860D6D*+TXV	A*EC961205DNA*	56,000	38,500	14.0	11.5	1,525	7367020
	CHPF4860D6D*+TXV	G*VC81005C*B*	56,500	38,500	14.0	11.5	1,520	6688615
	CHPF4860D6D*+TXV	G*VM971205DNA*	56,000	38,500	14.0	11.5	1,545	7359766
	CSCF4860N6D*+EEP		55,000	37,600	13.0	11.0	1,500	6688627
	CSCF4860N6D*+MBVC2000**-1A*		56,000	38,500	13.5	11.5	1,575	6688628
	CSCF4860N6D*+MBVC2000**-1A*+TXV		56,000	38,500	14.0	11.5	1,575	6688629
	CSCF4860N6D*+TXV	A*VM971005CNA*	55,500	38,000	13.5	11.0	1,520	7359769
	CSCF4860N6D*+TXV	G*VC961205DNA*	55,500	38,000	13.5	11.0	1,545	7359772
	CSCF4860N6D*+TXV	G*VM971005CNA*	55,500	38,000	13.5	11.0	1,520	7359773
	CSCF4860N6D*+TXV	G*VM971205DNA*	55,500	38,000	13.5	11.0	1,545	7359774
	CSCF4860N6D*+TXV	A*VM971205DNA*	55,500	38,000	13.5	11.0	1,545	7359770
	CSCF4860N6D*+TXV	A*EH800805C*A*	54,500	37,400	13.0	11.0	1,550	6946207
	CSCF4860N6D*+TXV	A*VC80805C*B*	56,500	38,500	13.5	11.5	1,520	6688630
	CSCF4860N6D*+TXV	A*VC961005CNA*	55,500	38,000	13.5	11.0	1,520	7359767
	CSCF4860N6D*+TXV	A*VC961205DNA*	55,500	38,000	13.5	11.0	1,545	7359768
	CSCF4860N6D*+TXV	A*EH801005C*A*	55,500	38,000	13.5	11.0	1,525	6946208
	CSCF4860N6D*+TXV	G*VC961005CNA*	55,500	38,000	13.5	11.0	1,520	7359771
	CSCF4860N6D*+TXV	G*E81005C*B*	55,500	38,000	13.5	11.0	1,525	6688641
	CSCF4860N6D*+TXV	G*E80805C*B*	54,500	37,400	13.0	11.0	1,550	6688640
	CSCF4860N6D*+TXV	G*VC81005C*B*	55,500	38,000	13.5	11.0	1,520	6688643
	CSCF4860N6D*+TXV	G*VC80805C*B*	56,500	38,500	13.5	11.5	1,520	6688642
	CSCF4860N6D*+TXV	A*VC81005C*B*	55,500	38,000	13.5	11.0	1,520	6688631

¹ BTU/h² Seasonal Energy Efficiency Ratio; Certified per AHRI 210/240 @ 80°F/ 67°F/ 95°F³ Energy Efficiency Ratio @ 80°F/ 67°F/ 95°F**NOTES**

- Always check the S&R plate for electrical data on the unit being installed.
- When matching the outdoor unit to the indoor unit, use the piston supplied with the outdoor unit or that specified on the piston kit chart supplied with the indoor unit.
- EEP - Order from Service Dept. Part No. B13707-38 or new Solid State Board B13707-35S. Part No. B13707-38 is not interchangeable with B13707-35S. The Amana® brand Gas Furnace contains the EEP cooling time delay.

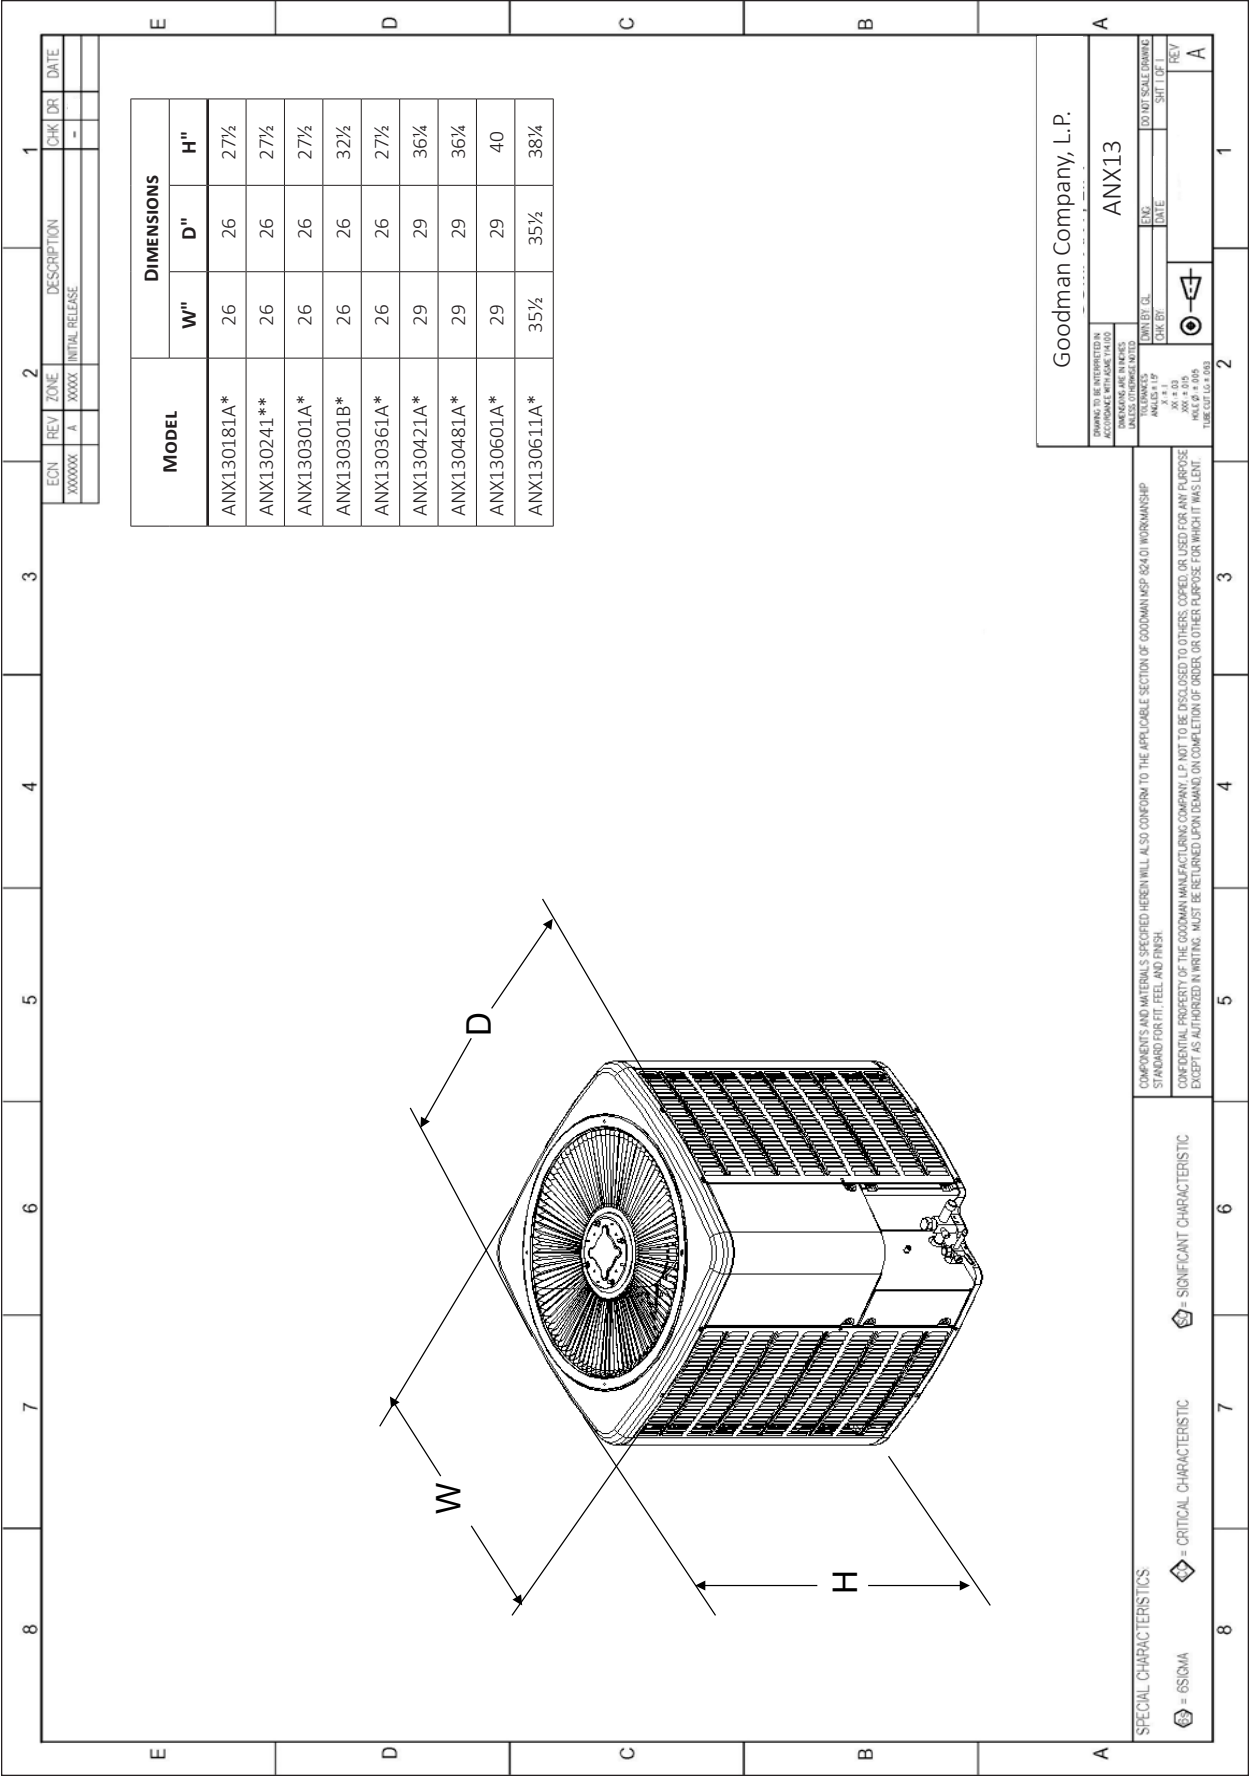

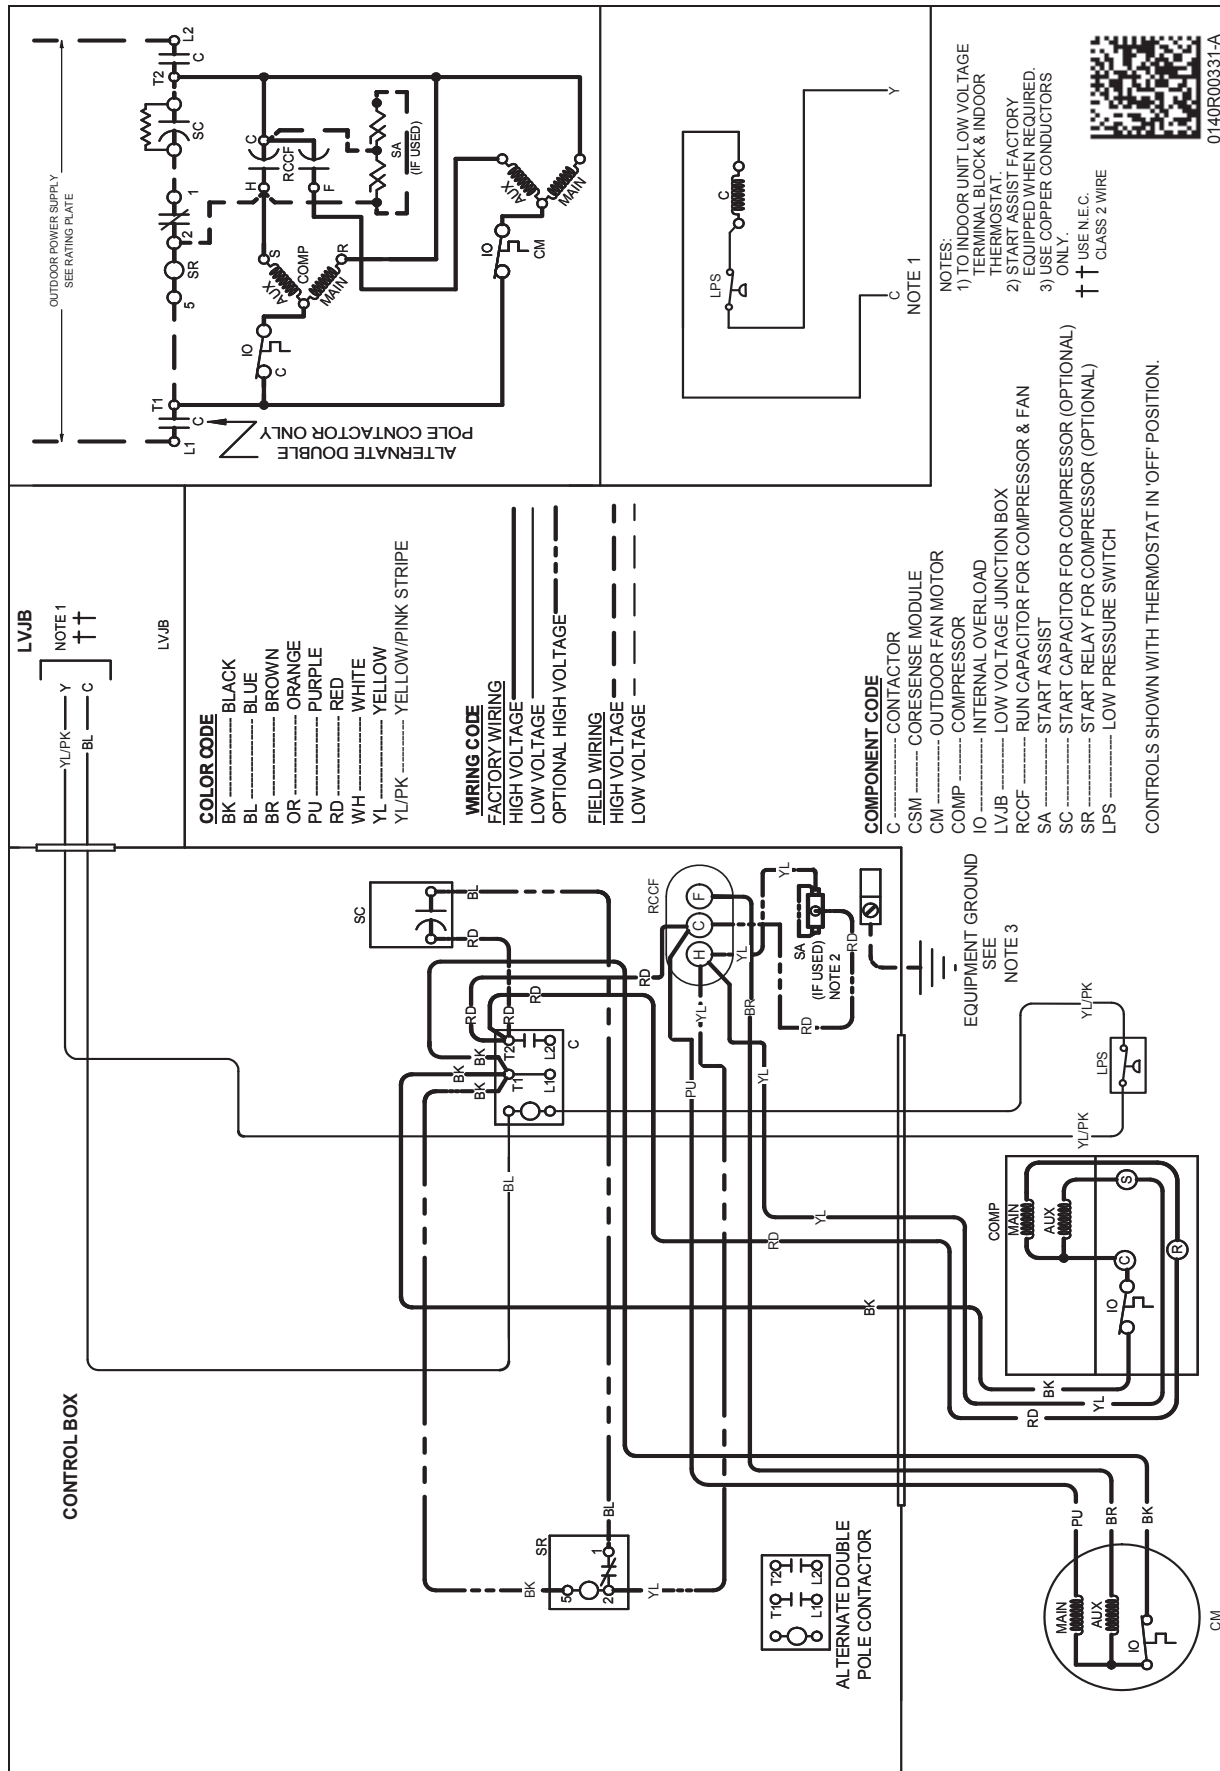


Wiring is subject to change. Always refer to the wiring diagram or the unit for the most up-to-date wiring.



WARNING

High Voltage: Disconnect all power before servicing or installing this unit. Multiple power sources may be present. Failure to do so may cause property damage, personal injury, or death.

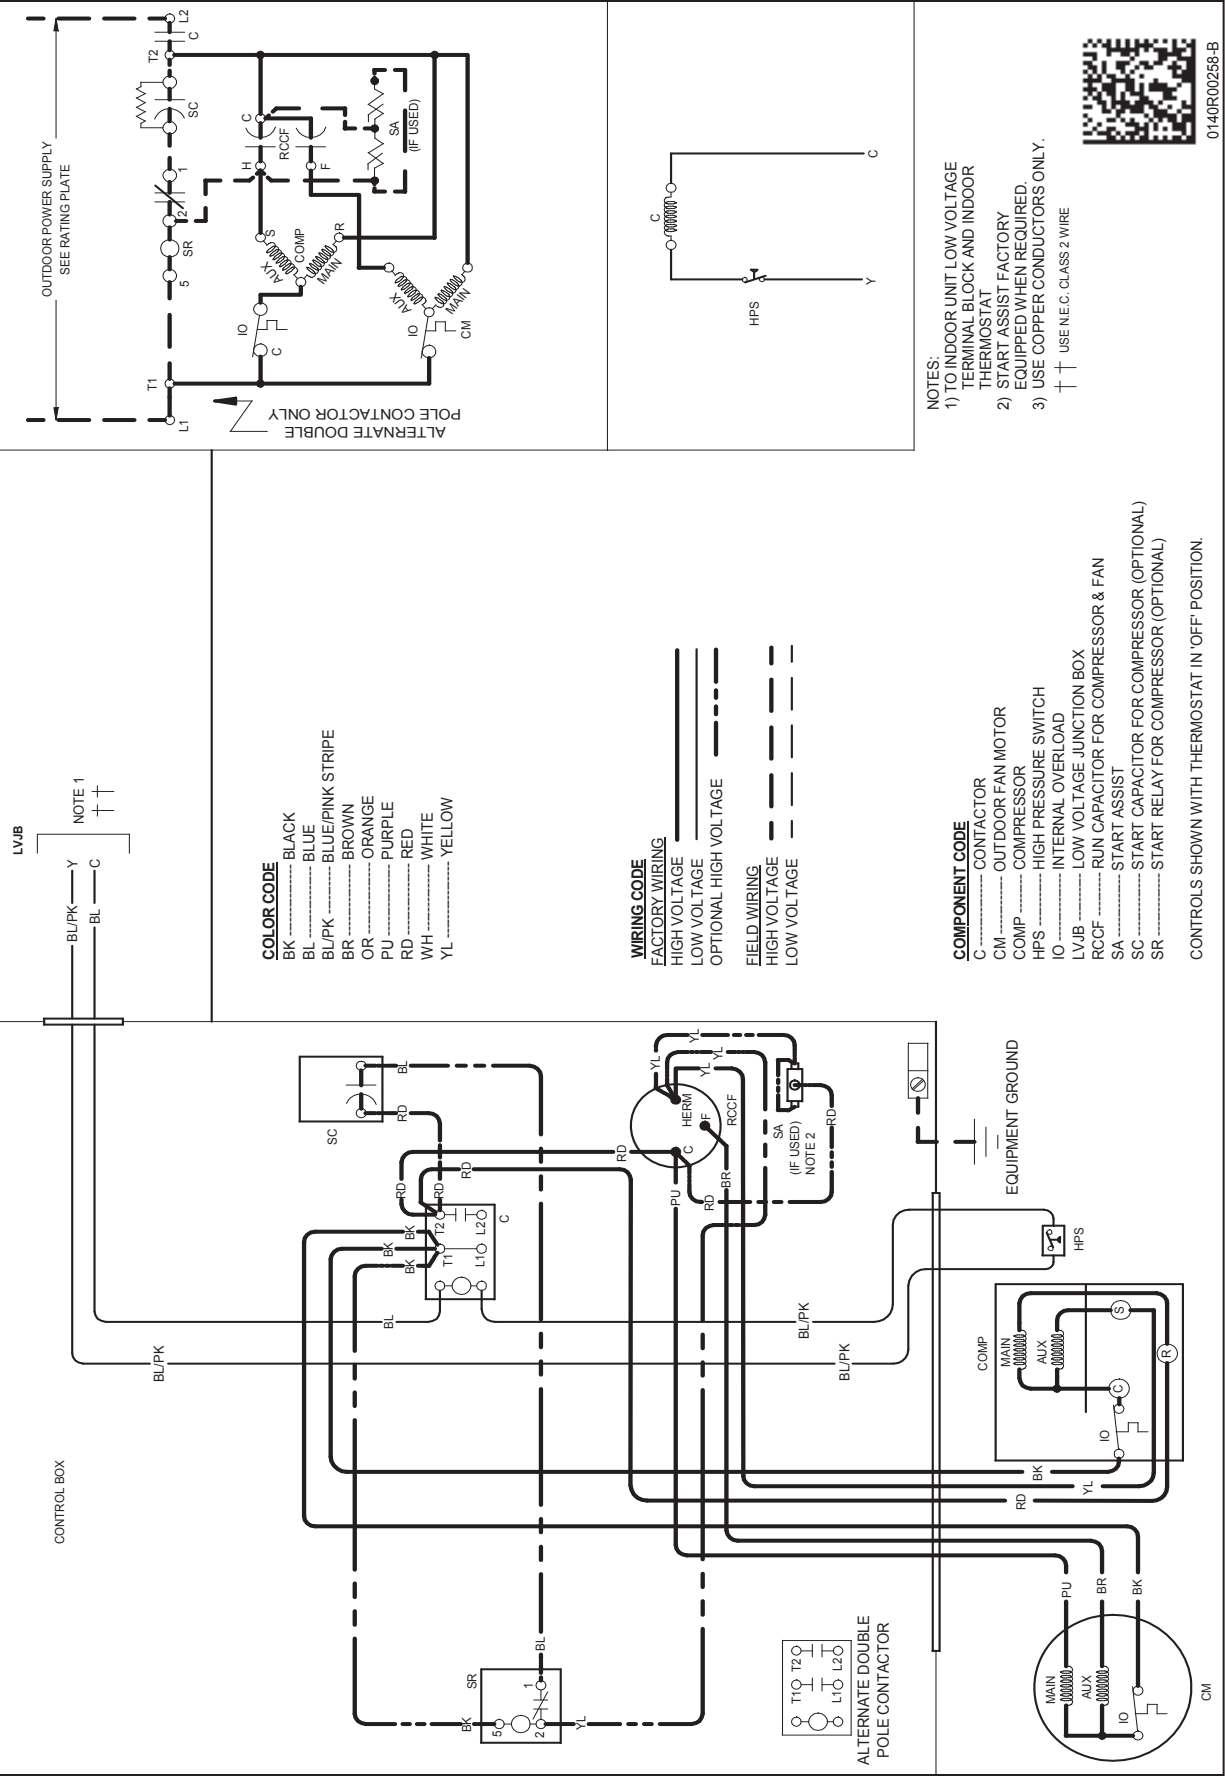


Wiring is subject to change. Always refer to the wiring diagram or the unit for the most up-to-date wiring.



WARNING

High Voltage: Disconnect all power before servicing or installing this unit. Multiple power sources may be present. Failure to do so may cause property damage, personal injury, or death.

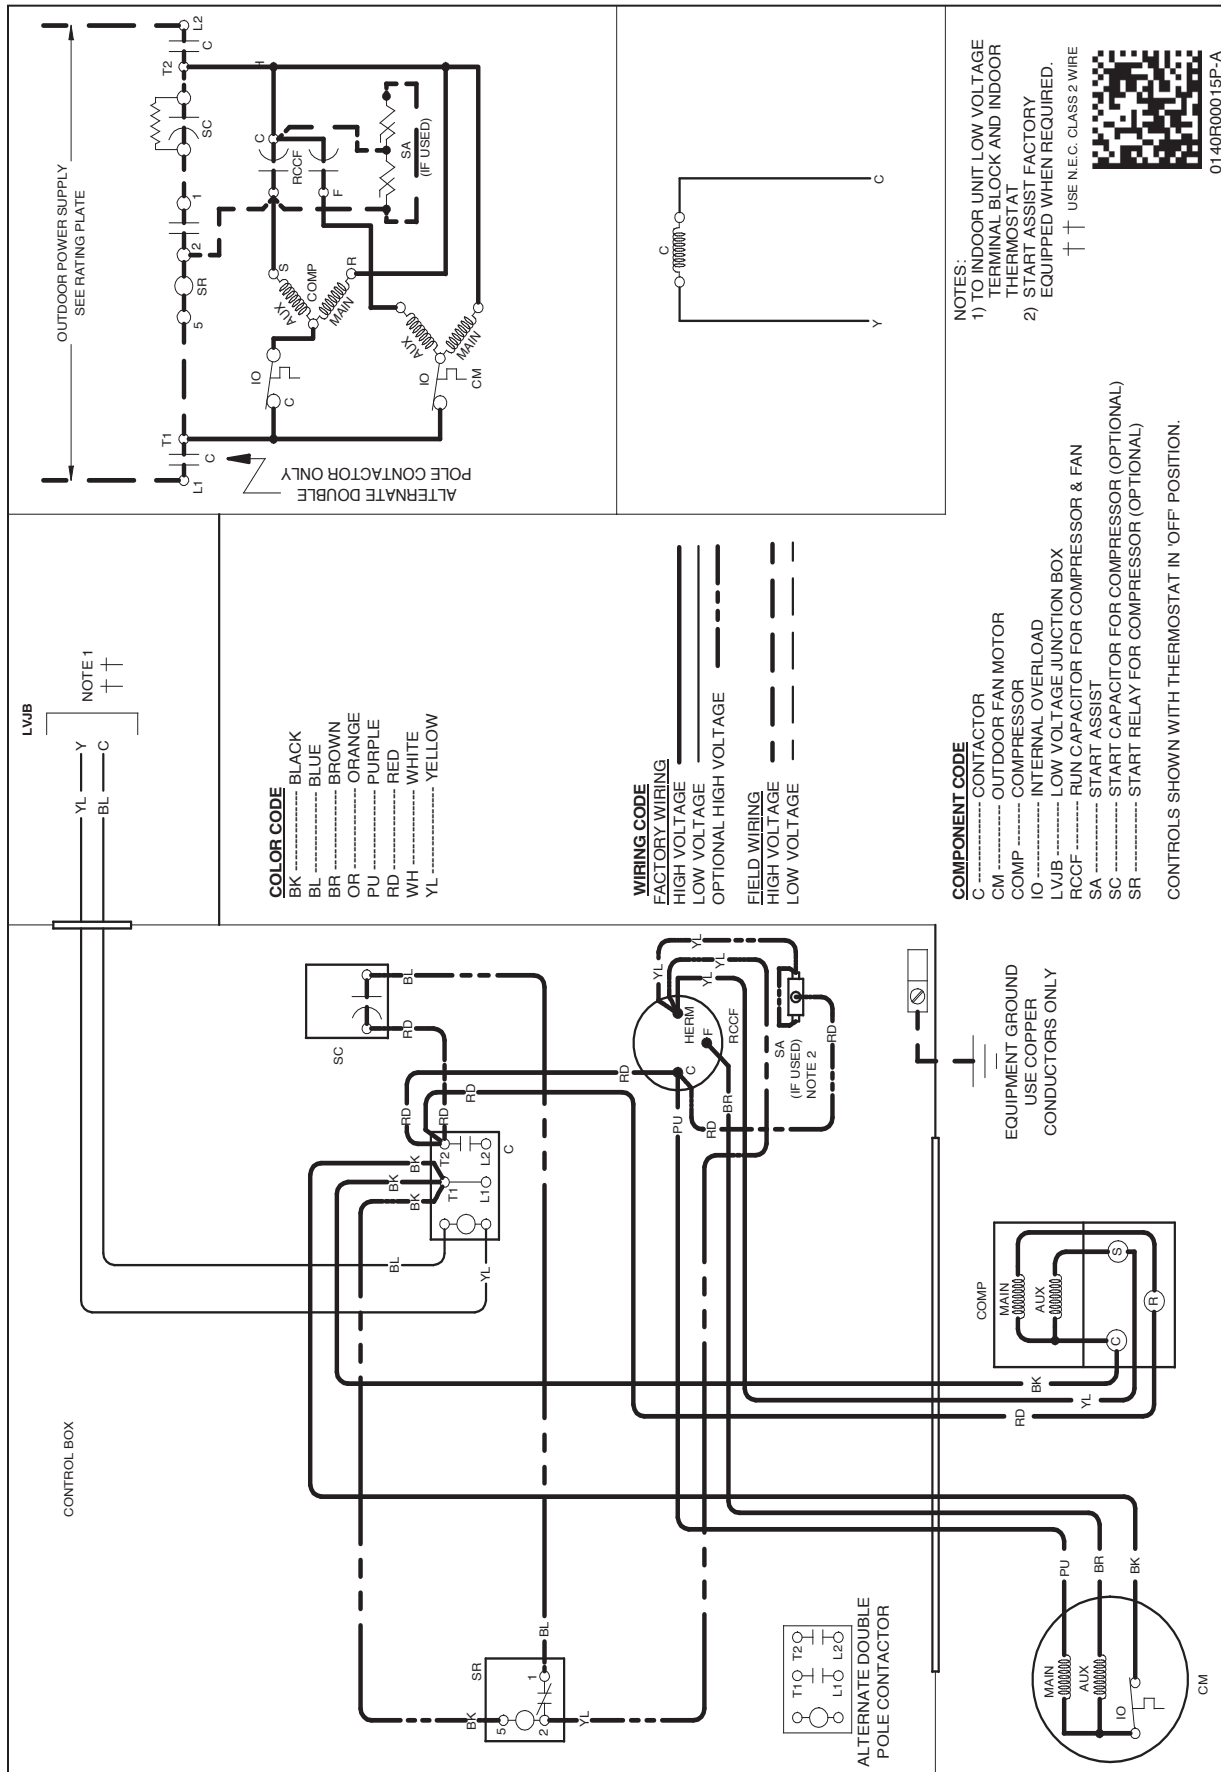

Wiring is subject to change. Always refer to the wiring diagram or the unit for the most up-to-date wiring.



WARNING

High Voltage: Disconnect all power before servicing or installing this unit. Multiple power sources may be present. Failure to do so may cause property damage, personal injury, or death.

MODEL	DESCRIPTION	ANX13 018**	ANX13 024**	ANX13 030**	ANX13 036**	ANX13 042**	ANX13 048**	ANX13 060**	ANX13 061**
ABK-20	Anchor Bracket Kit [^]		X	X	X	X	X	X	X
ABK-21	Anchor Bracket Kit [^]	X							
ASC-01	Anti-Short Cycle Kit	X	X	X	X	X	X	X	X
CSR-U-1	Hard-start Kit	X	X	X	X				
CSR-U-2	Hard-start Kit					X	X	X	X
CSR-U-3	Hard-start Kit						X	X	X
FSK01A ¹	Freeze Protection Kit	X	X	X	X	X	X	X	X
LSK02A ²	Liquid Line Solenoid Kit	X	X	X	X	X	X	X	X
O130R00000S	Low-Pressure Switch Kit	X	X	X	X	X	X	X	X
LAKT01A	Low-Ambient Kit	X	X	X	X	X	X	X	X
TX2N4 ²	TXV Kit	X							
TX2N4A ²	TXV Kit	X	X						
TX3N4 ²	TXV Kit			X	X				
TX5N4 ²	TXV Kit					X	X	X	X

[^] Contains 20 brackets; four brackets needed to anchor unit to pad

¹ Installed on indoor coil

² Field-installed, non-bleed, expansion valve kit — Condensing units and heat pumps with reciprocating compressors require the use of start-assist components when used in conjunction with an indoor coil using a non-bleed thermal expansion valve refrigerant metering device or liquid line solenoid kit.